

1-stage filter for 3-phase systems with neutral conductor, DIN rail mounting

new



Description

- 3 phase line filter with standard attenuation
- DIN rail mounting
- Easy and time saving handling

Approvals

- VDE Certificate Number: 40030736
- UL File Number: E72928

Applications

- Especially designed for electric switch and control cabinets
- Qualified for use in equipment according IEC/EN 60950


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Current	3 - 20A @ Ta 40 °C	Mounting	DIN rail mounting
Rated voltage	277/480VAC, 50/60 Hz	Terminal	Bolts and nuts M4, Quick connect terminal for PE
Approval for	3 - 20A / 277/480VAC	Operating Temperature [°C]	-25 °C to 100 °C
Overload Current	1.5 x Ir	Climatic Category	25/100/21 acc. to IEC 60068-1
Leakage Current	industrial < 1 mA (440V / 50Hz)	Degree of Protection	IP 20 acc. to IEC 60529
Dielectric Strength	2.25kVDC between L-L	Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
	1.7kVDC between L-N	MTBF	> 200'000h acc. to MIL-HB-217 F
	3kVDC between L-PE		
	Test voltage (2 sec)		
Number of Filter Stages	1-stage		
Weight	0.4kg		
Material: Housing	Metal		
Sealing Compound	UL 94V-0		

Dimensions

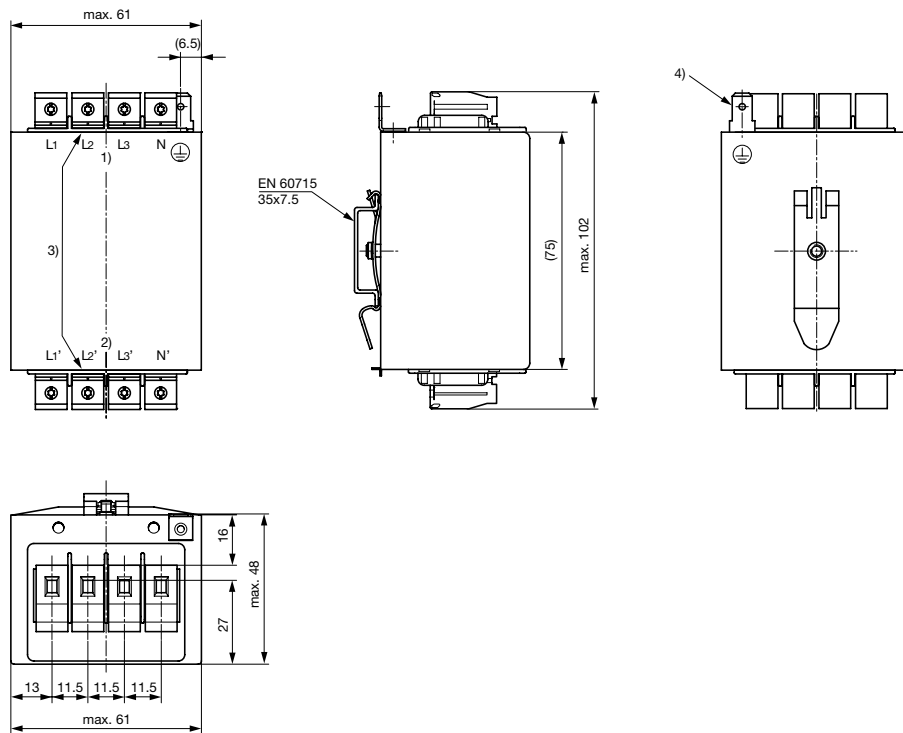


- 1) Line
- 2) Load
- 3) Tightening torque 0.6-0.8 Nm, Screw 4mm²
- 4) Quick connect terminal 6.3x0.8mm

Technical data to the filter components

Rated Current [A]	Rated Voltage [VAC]	L [mH]	C1 [nF]	C2 [nF]
10	277 - 480	0.4	100	4.7
20	277 - 480	0.15	100	22
3	277 - 480	1	100	4.7
6	277 - 480	0.5	100	4.7

Diagrams

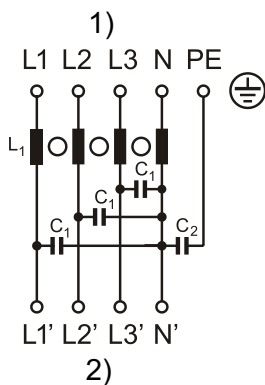

- 1) Line
- 2) Load

Attenuation Loss 0.1/100Ω differential mode 100/0.1Ω differential mode - - - - differential mode ____ common mode





Industrial version

3 A

6 A

10 A

20 A



Variants

Rated Current [A]	Tripped Power Dissi-	Leakage Current [mA] ¹⁾	Contact Resistance [mΩ]	Weight [g]	Screw clamps [mm ²] ²⁾	Order Number
10	3.2	0.5	8	395	4	FMAD-MRYB-1010
20	5.8	2	3.6	420	4	FMAD-MRYB-2010
3	1.4	0.5	38	385	4	FMAD-MRYB-0310
6	1.7	0.5	11.5	385	4	FMAD-MRYB-0610

1) Worst case leakage current acc. to IEC60950 - Annex G4 (situation with two interrupted lines). Nominal leakage current acc. to IEC60950 - 5.2.5. can be found in section technical data.

2) Maximum conductor cross section (wire gauge) to be used; a comparative table for AWG and mm² values can be found in the general product information www.schurter.com/emc_info

Packaging unit 5 Pcs