Touch-Safe Fuseholder, 35 mm DIN-Rail, 10.3 x 38 mm, 1000 VDC

1000 VDC · - W · 600 VAC/DC · 30 A (UL/CSA)

Description
- Mountable on 35 mm DIN-Rail
- Easy installation and removal of fuses
- For Fuses up to 100 kA Interrupting Rating

Standards
- IEC 60269-2, -4, -6
- UL 4248-1
- CSA C22.2 no. 39

Approvals
- UL File Number: E39328
- CSA File Number: 248899

Applications
- Combiner Boxes in Photovoltaic Systems

References
Fuseholder to ASO 10.3x38

Weblinks
pdf-datasheet, html-datasheet, General Product Information, Approvals, RoHS, CHINA-RoHS, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product

Technical Data

Fuse-Link	10.3 x 38 mm
Mounting	DIN-Rail Mounting
Terminal	Press plate: 2 - 10 mm² / AWG #8 - 14 (stranded), 2 - 6 mm², AWG #10 - 14 (solid), 2 Nm / 17.7 lb-in (max. torque)
Rated Voltage	1000 VDC (Self certified), 600 VAC/ DC (UL/CSA)
Rated Current	30 A (UL/CSA)
Rated Power Acceptance IEC	- W @ Ta 23 °C max. 4 W (self certified)
Degree of Protection	IP 20
Admissible Ambient Air Temp.	-40 °C to 130 °C
Material: Socket	Thermoplastic, UL 94V-0
Unit Weight (Socket/Cap)	54 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Tech. Information

Dimensions

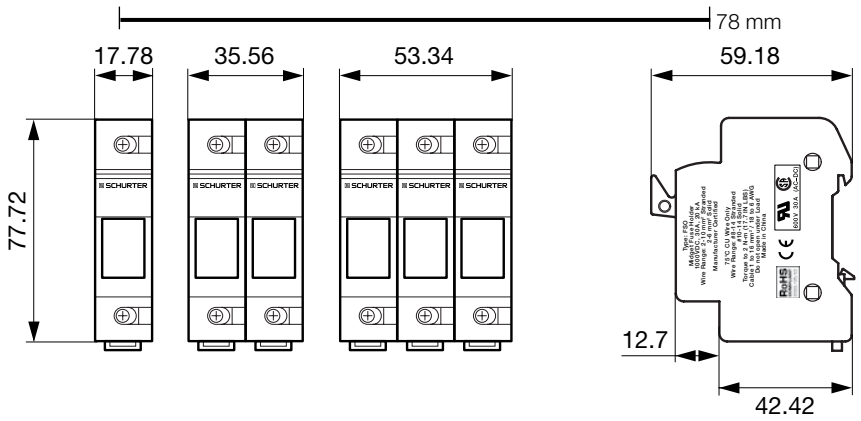

Do not open under load

Variants

Holder	Remark	Order Number
●	1 Pole	0091.0001
●	2 Poles	0091.0002
●	3 Poles	0091.0003

Packaging Unit

0091.0001	Bulk (10 pcs.)
0091.0002	Bulk (5 pcs.)
0091.0003	Bulk (4 pcs.)

19.02.2013

SCHURTER ELECTRONIC COMPONENTS
The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.