

Fuseholder Open Design, 6.3 x 32 mm, Screw Clamp, grey



250 VAC · 3.5W/16A

GAM
T1 NNO**Description**

- Screw or rivet fastening

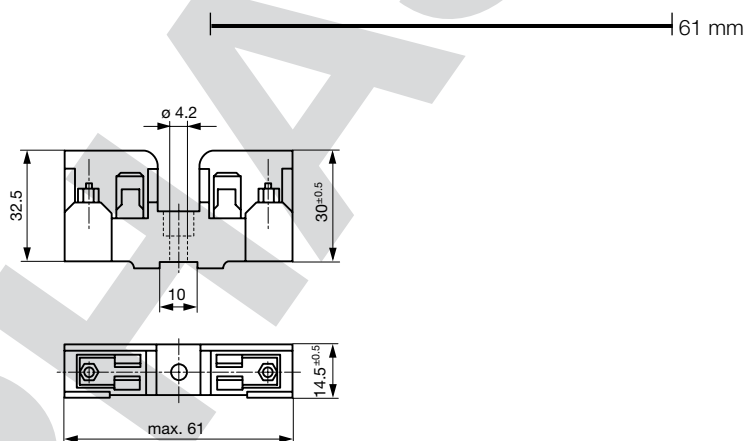
ReferencesThis type is Phase-out without alternate type
Last order date: 11.01.2012**Weblinks**

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	6.3 x 32mm
Mounting	Screw
Mounting	Screw or Rivet
Terminal	Screw clamps
Rated Voltage	250VAC
Rated Current	16A
Rated Power Acceptance IEC	3.5W / 16A @ Ta 23 °C
Degree of Protection	IP 00
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/56 acc. to IEC 60068-1
Material: Socket	Thermoset, Light-Grey
Unit Weight (Socket/Cap)	40 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Dielectric strength, Current, HB5

Soldering Methods	Wave
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phase D

Dimensions**Packaging Unit**

Bulk (100 pcs.)