

# Proximity Inductive Sensors

## Standard range, Nickel-Plated Brass Housing

### Types ICB, M18

CARLO GAVAZZI



- Sensing distance: 5 to 8 mm
- Flush and non-flush types
- Short and long body versions
- Rated operational voltage ( $U_b$ ): 10 - 36 VDC
- Output: DC 200 mA, NPN or PNP
- Normally open, Normally closed
- LED indication for output ON
- Protection: reverse polarity, short circuit, transients
- Cable and M12 plug versions
- According to IEC 60947-5-2

## Product Description

A family of inductive proximity switches in industrial standard nickel-plated brass housings. They are able to handle applications where high sensing range is requested.

Output is open collector NPN or PNP transistors.

## Ordering Key

**ICB18SF05NOM1**

Type \_\_\_\_\_  
 Housing style \_\_\_\_\_  
 Housing material \_\_\_\_\_  
 Housing size \_\_\_\_\_  
 Housing length \_\_\_\_\_  
 Detection principle \_\_\_\_\_  
 Sensing distance \_\_\_\_\_  
 Output type \_\_\_\_\_  
 Output configuration \_\_\_\_\_  
 Connection \_\_\_\_\_

## Type Selection

| Conne-<br>tion | Body<br>style | Rated<br>operating<br>distance $S_n$ | Ordering no.<br>NPN<br>Normally open | Ordering no.<br>PNP<br>Normally open | Ordering no.<br>NPN<br>Normally closed | Ordering no.<br>PNP<br>Normally closed |
|----------------|---------------|--------------------------------------|--------------------------------------|--------------------------------------|--|--|
| Cable          | Short         | 5 mm <sup>1)</sup>                   | ICB 18 SF 05 NO                      | ICB 18 SF 05 PO                      | ICB 18 SF 05 NC                        | ICB 18 SF 05 PC                        |
| Cable          | Short         | 8 mm <sup>2)</sup>                   | ICB 18 SN 08 NO                      | ICB 18 SN 08 PO                      | ICB 18 SN 08 NC                        | ICB 18 SN 08 PC                        |
| Plug           | Short         | 5 mm <sup>1)</sup>                   | ICB 18 SF 05 NOM1                    | ICB 18 SF 05 POM1                    | ICB 18 SF 05 NCM1                      | ICB 18 SF 05 PCM1                      |
| Plug           | Short         | 8 mm <sup>2)</sup>                   | ICB 18 SN 08 NOM1                    | ICB 18 SN 08 POM1                    | ICB 18 SN 08 NCM1                      | ICB 18 SN 08 PCM1                      |
| Cable          | Long          | 5 mm <sup>1)</sup>                   | ICB 18 LF 05 NO                      | ICB 18 LF 05 PO                      | ICB 18 LF 05 NC                        | ICB 18 LF 05 PC                        |
| Cable          | Long          | 8 mm <sup>2)</sup>                   | ICB 18 LN 08 NO                      | ICB 18 LN 08 PO                      | ICB 18 LN 08 NC                        | ICB 18 LN 08 PC                        |
| Plug           | Long          | 5 mm <sup>1)</sup>                   | ICB 18 LF 05 NOM1                    | ICB 18 LF 05 POM1                    | ICB 18 LF 05 NCM1                      | ICB 18 LF 05 PCM1                      |
| Plug           | Long          | 8 mm <sup>2)</sup>                   | ICB 18 LN 08 NOM1                    | ICB 18 LN 08 POM1                    | ICB 18 LN 08 NCM1                      | ICB 18 LN 08 PCM1                      |

<sup>1)</sup> For flush mounting in metal

<sup>2)</sup> For non-flush mounting in metal

## Specifications









|   |   |  |  |
|---|---|--|--|
| <b>Rated operational voltage (<math>U_b</math>)</b> | 10 to 36 VDC (ripple incl.)                       | <b>Indication for short circuit</b>                          | LED blinking   |
| <b>Ripple</b>                                       | ≤ 10%   | <b>Assured operating sensing distance (<math>S_a</math>)</b> | $0 \leq S_a \leq 0.81 \times S_n$                                |
| <b>Output current (<math>I_o</math>)</b>            | ≤ 200 mA @ 50°C<br>(≤ 150 mA @ 50-70°C)           | <b>Effective operating distance (<math>S_r</math>)</b>       | $0.9 \times S_n \leq S_r \leq 1.1 \times S_n$                    |
| <b>OFF-state current (<math>I_r</math>)</b>         | ≤ 50 μA   | <b>Usable operating distance (<math>S_u</math>)</b>          | $0.9 \times S_r \leq S_u \leq 1.1 \times S_r$                    |
| <b>No load supply current (<math>I_o</math>)</b>    | ≤ 15 mA   | <b>Repeat accuracy (R)</b>                                   | ≤ 10%  |
| <b>Voltage drop (<math>U_d</math>)</b>              | Max. 2.5 VDC @ 200 mA                             | <b>Differential travel (H)</b><br>(Hysteresis)               | 1 to 20% of sensing dist.  |
| <b>Protection</b>                                   | Reverse polarity,<br>short-circuit, transients    | <b>Ambient temperature</b>                                   | Operating<br>Storage   |
| <b>Dielectric impulse voltage withstand</b>         | 1 kV/0.5 J  |  | -25° to +70°C (-13° to +158°F)<br>-30° to +80°C (-22° to +176°F) |
| <b>Power ON delay (<math>t_v</math>)</b>            | 300 ms  | <b>Shock and vibration</b>                                   | IEC 60947-5-2/7.4  |
| <b>Operating frequency (f)</b>                      | ≤ 1500 Hz   | <b>Housing material</b>                                      |  |
| <b>Indication for output ON</b>                     | Activated LED, yellow<br>NO version<br>NC version | Body   | Nickel-plated brass  |
|   | Target present<br>Target not present              | Front  | Grey thermoplastic polyester                                     |

## Specifications (cont.)





|                                     |  |
|-------------------------------------|--|
| <b>Connection</b>                   |  |
| Cable                               | 2 m, 3 x 0.3 mm <sup>2</sup> , grey PVC, oil proof |
| Plug                                | M12 x 1  |
| <b>Degree of protection</b>         | IP 67  |
| <b>Weight</b> (cable/nuts included) |  |
| Cable                               | Max. 150 g   |
| Plug                                | Max. 70 g  |
| <b>Dimensions</b>                   | See diagrams below                                 |
| <b>Tightening torque</b>            |  |
| Non-flush version                   | 25 Nm  |
| Flush version                       |  |
| From 1 to 3 mm                      | 15 Nm  |
| > 3 mm                              | 25 Nm  |

|                       |   |
|-----------------------|---|
| <b>Approvals</b>      | UL (cRUus)                                    |
| <b>CE-marking</b>     | Yes   |
| <b>EMC protection</b> | According to IEC 60947-5-2                    |
| IEC 6100-4-2 (ESD)    | 8 KV air discharge,<br>4 KV contact discharge |
| IEC 6100-4-3          | 3 V/m   |
| IEC 6100-4-4          | 2 kV  |
| IEC 6100-4-6          | 3 V   |
| IEC 6100-4-8          | 30 A/m  |

## Dimensions

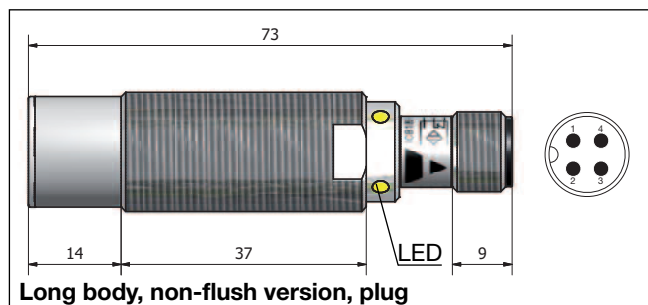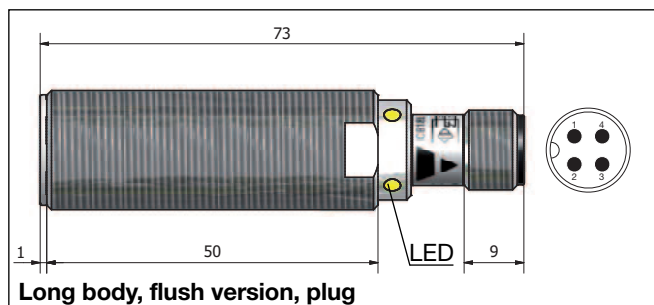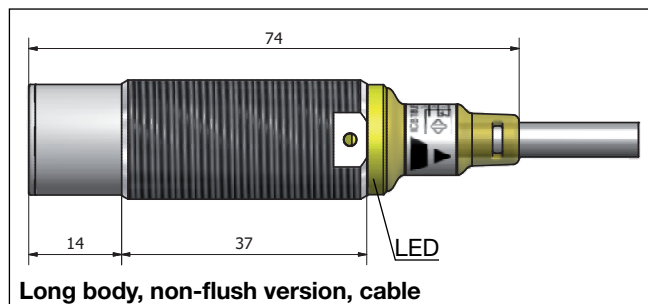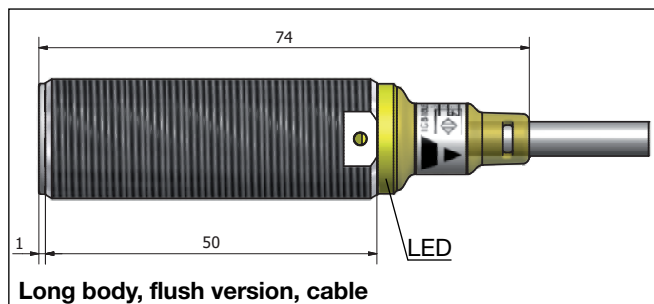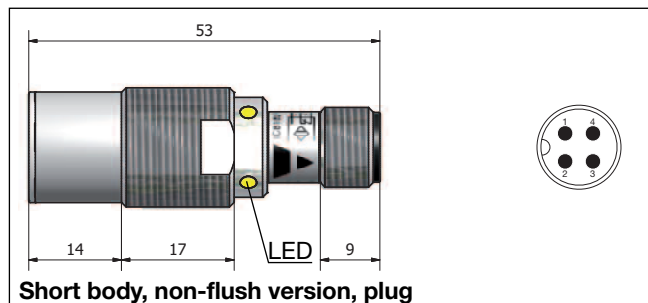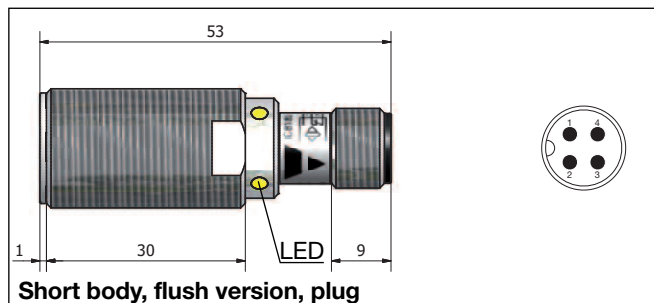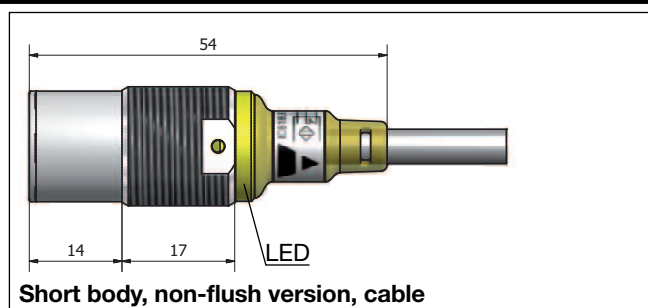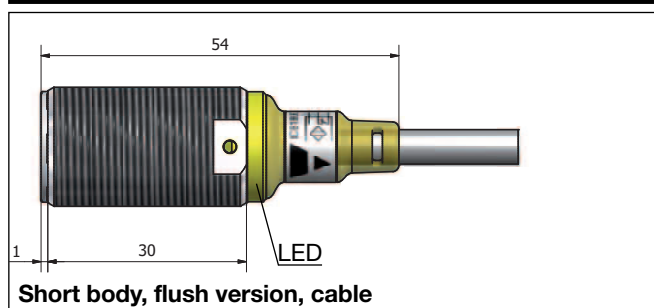


## Wiring Diagrams

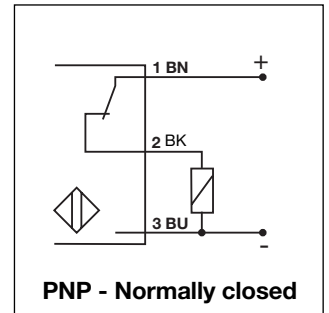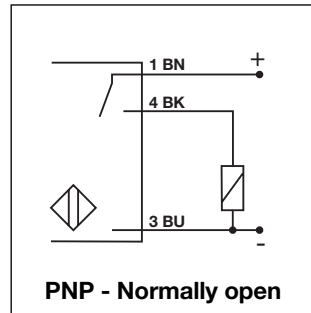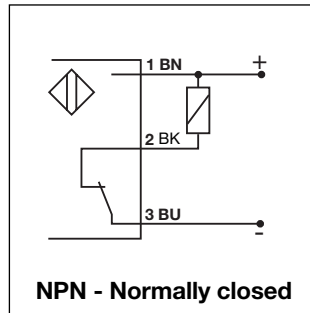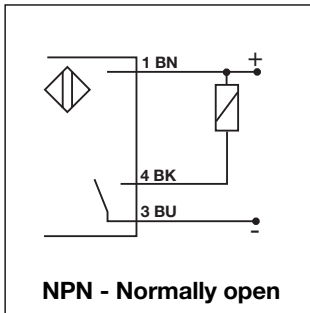


## Installation


Flush sensor, when installed in damping material, must be according to Picture 1A.

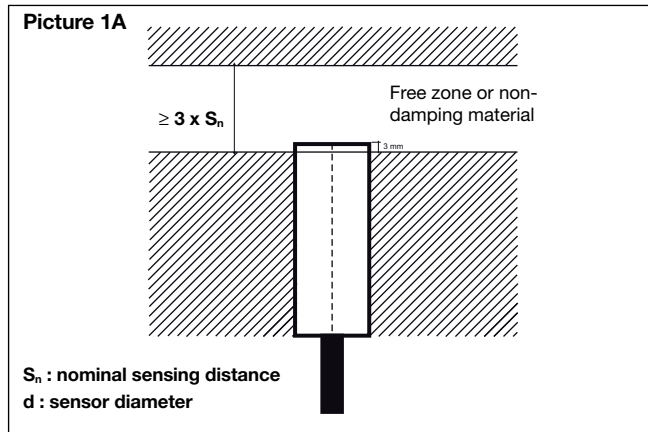


Non-flush sensor, when installed in damping material, must be according to Picture 1B.

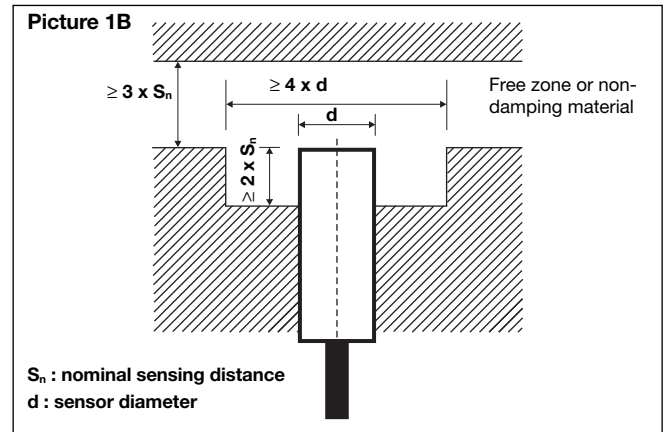


Flush sensors, when installed together in damping material, must be according to Picture 2A.

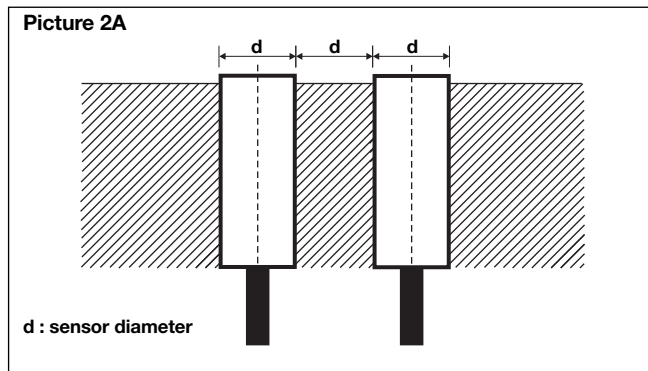

Non-flush sensors, when installed together in damping material, must be according to Picture 2B.

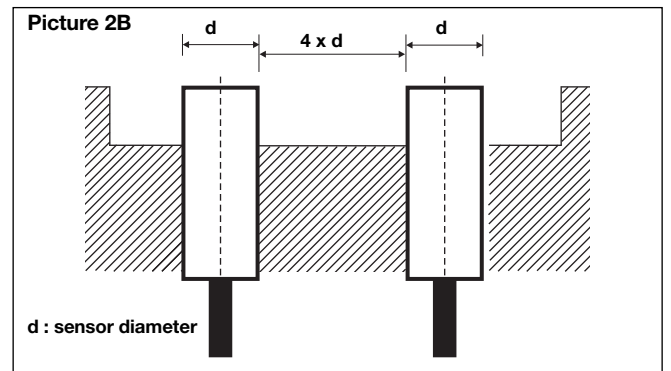

For sensors installed opposite each other, a minimum space of  $6 \times S_n$  (the nominal sensing distance) must be observed (See Picture 3).

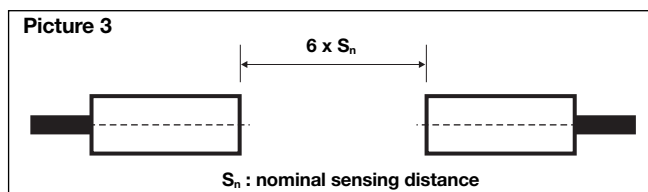

## Reduction factors

The rated operating distance is reduced by the use of metals and alloys other than Fe360.

The most important reduction factors for inductive proximity sensors are shown in Picture 4.

## Delivery Contents

- Inductive proximity switch ICB.
- 2 nuts NPB
- Packaging: plastic bag

