# General Accessories Plugs Type CONG





- Straight or 90° connector
- Union nut M12 or M8
- Connection cable PVC
- Moulded PUR housing
- CE-marking
- Degree of protection IP 68
- EN 60947-5-2

## **Product Description**

The CONG.. is a family of inexpensive general purpose connectors for sensor connection. Ideal for connecting sensors in control and automation tech-

nology. The connector is available in 3 or 4 wire versions as well as straight or angled versions.

Ordering Key	CONG1A-A5
CONG = Carlo Gavazzi	
1 = M12 DC	
5 = M8 DC	
A = Antivalent (NO + NC)	
O = Normally open (NO)	
A = 90° angle	
S = Straight	
2 = 2 meters	
5 = 5 meters	

## **Type Selection - DC Types**

Plug type	Cable length	Ordering number Straight 3-wire version	Ordering number Angled 3-wire version	Ordering number Straight 4-wire version	Ordering number Angled 4-wire version
M12	2 m 5 m	CONG10-S2 CONG10-S5	CONG10-A2 CONG10-A5	CONG1A-S2 CONG1A-S5	CONG1A-A2 CONG1A-A5
M8	2 m 5 m			CONG5A-S2 CONG5A-S5	CONG5A-A2 CONG5A-A5


# **Specifications**


250 VAC/300 VDC
≤ 4 A
$\leq 6 \text{ m}\Omega$
CuZn (brass) 0.3 micron Au (gold)
1 mm
Nylon, glass reinforced, black
EN 60947-5-2
-25° to +90°C (-77° to +194°F)
IP 68

O-ring sealing	Vitron (Trade mark of Du Pont)
Insulation test	2.0 kV/eff./60 s
Moulded body material	PUR/black
Union nut Coating	CuZn (brass) Nickel plated
Connection cable	Light grey, oilproof PVC
Wire cross section	0.34 mm <sup>2</sup> (42 x 0.10)
Weight 2 m version 5 m version	85 g 205 g



### **Dimensions**

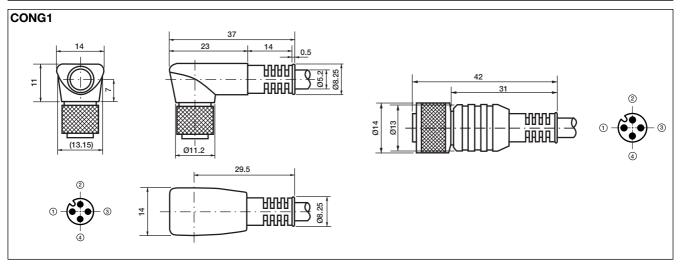

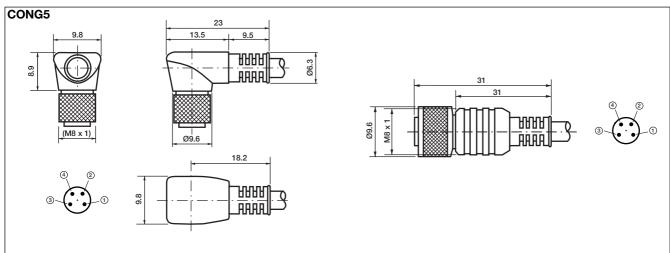

## **Pin View of Cable Connectors**

#### CONG1





1 + 2 Not conn. 3 -

4 NO Signal 3-wire:

1 = Brown

2 = not connected

3 = Blue

4 = Black

#### CONG1

#### B NO/NC (4-wire)




1 + 2 NC Signal 3 -4 NO

Signal

1 = Brown 2 = White 3 = Blue 4 = Black

4-wire:

#### CONG5



**4-wire:**1 = Brown
2 = White

3 = Blue 4 = Black