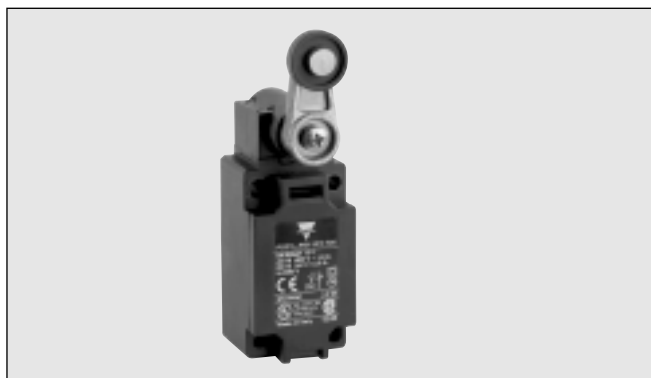


Limit Switches - Limit Type Plastic Body IP65

CARLO GAVAZZI



- Double Insulation ☐
- Degree of protection IP65
- Reinforced UL-V0 thermoplastic fiber-glass body
- Positive Opening Operation $\rightarrow$
- Minimum Actuation Force/Torque
- Minimum Force to achieve Positive Opening Operation
- Precise operating points (consistency)
- Immune to electromagnetic disturbances
- Zb type contact blocks
- Current Ith = 10A
- Rated insulation voltage Ui = 500V
- UL, CSA, CE
- Conform with IEC 947-5-1 (EN 60947-5-1)

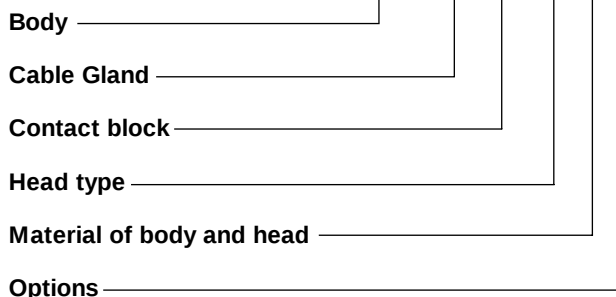
Product Description

They are developed in order to be used for following operations:

- Presence/Absence
- Positioning and travel limit
- Objects passing/counting

Ordering Key

PS31L-PS11RT-T00



Description of the key codes

Body

PS31L | PS 40mm (fix 30mm) 1 cable inlet for General Purpose

Cable Gland

M | M20
P | PG13.5
N | 1/2 NPT

Contact block

O11 | 1NO+1NC overlap slow(+)
S02 | 2NC snap(+)
S11 | 1NO+1NC snap(+)
T02 | 2NC slow(+)
T03 | 3NC slow(+)
T11 | 1NO+1NC slow(+)
T12 | 1NO+2NC slow(+)
T20 | 2NO slow
T21 | 2NO+1NC slow(+)
T30 | 3NO slow

Material of body and head

T | Thermoplastic Body and Thermoplastic head

Options

00 | no option

Head type

L3 | adj square (3x3) steel rod LEVER
LA | adj Ø3 rod LEVER stainless steel rod
LB | nylon actuator with stainless steel spring
LF | adj fiberglass rod LEVER Ø3
LG | adj fiberglass rod LEVER Ø6
LN | adj nylon rod LEVER
LP | multidir nylon actuator with stainless steel spring
LS | stainless steel spring multidir actuator
LW | Stainless stell spring multidir actuator (cat Whisker)
LZ | Stainless stell spring actuator
P0 | metal plain PLUNGER
PB | steel ball PLUNGER
PH | metal PLUNGER +gasket
PG | steel roller PLUNGER +gasket
PR | metal roller PLUNGER
R1 | adj LEVER with nylon roller
R2 | adj LEVER with stainless stell roller
R3 | adj LEVER with stell ball bearing
RH | plastic roller LEVER on metal PLUNGER (left)
RK | one way LEVER stainless steel roller
RB | one way LEVER steel ball bearing
RJ | plastic roller LEVER on metal PLUNGER +gasket (left)
RY | one way LEVER +gasket with stainless steel roller
RC | one way LEVER + gasket with steel ball bearing
RT | nylon roller LEVER
RS | metal roller LEVER
RO | roller LEVER steel ball bearing
W0 | Ø50 rubber roller LEVER
W1 | adj LEVER with Ø50 rubber roller

Technical Data

Standards

Certifications – Approvals

Air temperature near the device

- during operation °C
- for storage °C

Climatic withstand

Mounting positions

Shock withstand (according to IEC 68-2-27 and 60068-2-27) g
(1/2sinusoidal shock for 11 ms) no change in contact position

Resistance to vibrations (acc.to IEC 68-2-6 and EN 60068-2-6) g

Protection against electrical shocks (acc.to IEC 536)

Degree of protection (according to IEC 529 and EN 60529)

Consistency (measured over 1 million operations)

IEC 60947-1, IEC 60947-5-1, EN 60947-1, EN 60947-5-1,
UL508 and CSA C22-2 n°14
UL – CSA

-25 ... +70

-30 ... +80

According to IEC 68-2-3 and salty mist according to IEC 68-2-11

All positions are authorized

50g*

25g (10...500Hz) no change in position of contacts greater than 100µs

Class II

IP65

0.1 mm (upon closing point)

* except for PS21/PS42 with head type W0, W1: 25g.

Electrical Data

Rated insulation voltage U_i

-according to IEC 60947-1 and EN 60947-1

-according to UL 508, CSA C22-2 n°14

Rated impulse withstand voltage U_{imp} kV

(according to IEC 60947-1 and EN 60947-1)

Conventional enclosed thermal current I_{the} A

(according to IEC 60947-5-1 and EN 60947-5-1) ($\theta \leq 40^\circ\text{C}$)

Short-circuit protection - gG type fuses A

Rated operational current

I_e / AC-15 - acc.to IEC 60947-5-1 24Vac (50/60 Hz) A

130Vac (50/60 Hz) A

230Vac (50/60 Hz) A

240Vac (50/60 Hz) A

400Vac (50/60 Hz) A

- acc.to UL 508, CSA C22 n°14

I_e / DC-13 - acc.to IEC 60947-5-1 24Vdc A

110Vdc A

250Vdc A

- acc.to UL 508, CSA C22 n°14

Electrical durability

(according to IEC 60497-5-1 annex C)

- max. switching frequency Cycles/h

- load factor

Connecting data of contact blocks

Connecting terminals

Connecting capacity 1 or 2 x mm² / AWG

Terminal marking

Positivity

500V (degree of pollution 3)

A 600, Q 600

6

10

10

10

5.5

3.1

3

1.8

A 600

2.8

0.6

0,27

Q 600

Utilization categories AC-15 and DC-13 (see curves and value below)

3600

0,5

M3,5 (+,-) pozidriv 2 screw with cable clamp

0,5mm² / AWG 20 to 2,5mm² / AWG 14

According to EN 50013

Contacts with positive opening operation as per

IEC 60947-5-1 chapter 3

Diagram for snap action contact:





Diagram for slow action contact:



Electrical durability for DC-13 utilization category

Power breaking for a durability of 5 million operating cycles

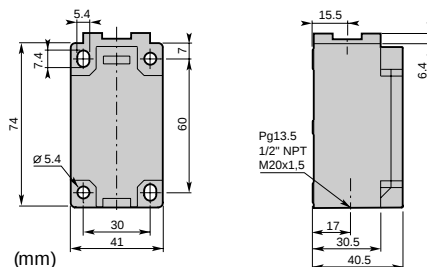
	Snap action	Slow action
Voltage 24V	9,5W	12W
Voltage 48V	6,8W	9W
Voltage 110V	3,6W	6W

Limit Switches - Limit Type (PS31) Plastic Body IP65

CARLO GAVAZZI

■ Cable Gland

P = one cable inlet PG13.5 cable gland
M = one cable inlet M20x1.5 cable gland
N = one cable inlet 1/2" NPT cable gland



▲ Contact block (Zb type)

S11 (1NO+1NC) Snap action	T11 (1NO+1NC) Non overlapping Slow action	O11 (1NO+1NC) Overlapping Slow action	T02 (2NC) Slow Action	T20 (2NO) Slow action
S02 (2NC) Snap action	T12 (1NO+2NC) Non overlapping Slow action	T21 (2NO+1NC) Non overlapping Slow action	T03 (3NC) Simultaneous Slow action	T30 (3NO) Simultaneous Slow action

		S11 0 1.0 2.2 3.8 5.9 mm	T11 0 1.3 2.9 5.9 mm	O11 0 2.4 5.0 5.9 mm	T02 0 1.1 2.7 5.9 mm
		T20 0 1.0 5.9 mm	S02 0 1.0 2.0 3.6 5.9 mm	T12 0 0.9 2.4 5.9 mm	T21 0 1.0 2.5 5.9 mm
		T03 0 0.9 2.4 5.9 mm	T30 0 1.3 5.9 mm		

Conformity / (NC) EN 50041 / (NC)
Max. Actuation speed 0.5ms
Min. force or torque 14N / 40Nm
Weight 145g

Plain steel plunger
Code

PS31L-●▲P0-T00

		S11 0 1.0 2.2 3.8 5.9 mm	T11 0 1.3 2.9 5.9 mm	O11 0 2.4 5.0 5.9 mm	T02 0 1.1 2.7 5.9 mm
		T20 0 1.0 5.9 mm	S02 0 1.0 2.0 3.6 5.9 mm	T12 0 0.9 2.4 5.9 mm	T21 0 1.0 2.5 5.9 mm
		T03 0 0.9 2.4 5.9 mm	T30 0 1.3 5.9 mm		

Conformity / (NC) EN 50041 / (NC)
Max. Actuation speed 0.5ms
Min. force or torque 14N / 40Nm
Weight 145g

Steel ball plunger
Code

PS31L-●▲PB-T00

		S11 0 2.4 4.6 7.5 10.5 mm	T11 0 3.1 6.0 10.5 mm	O11 0 5.1 8.0 10.5 mm	T02 0 2.8 5.7 10.5 mm
		T20 0 2.6 10.5 mm	S02 0 2.4 4.4 7.3 10.5 mm	T12 0 2.8 5.3 10.5 mm	T21 0 2.9 5.4 10.5 mm
		T03 0 2.8 5.3 10.5 mm	T30 0 3.3 10.5 mm		

Conformity / (NC) EN 50041 / (NC)
Max. Actuation speed 0.5ms
Min. force or torque 14N / 40Nm
Weight 150g

Steel roller plunger
Code









PS31L-●▲PR-T00











		S11 0 1.0 2.2 3.8 5.9 mm	T11 0 1.3 2.9 5.9 mm	O11 0 2.4 5.0 5.9 mm	T02 0 1.1 2.7 5.9 mm
		T20 0 1.0 5.9 mm	S02 0 1.0 2.0 3.6 5.9 mm	T12 0 0.9 2.4 5.9 mm	T21 0 1.0 2.5 5.9 mm
		T03 0 0.9 2.4 5.9 mm	T30 0 1.3 5.9 mm		









Conformity / (NC) EN 50041 / (NC)
Max. Actuation speed 0.5ms
Min. force or torque 14N / 40Nm
Weight 145g












Plain steel plunger with dust protection cup
Code













PS31L-●▲PH-T00

					
					
					
Conformity / (NC)		Steel roller plunger with dust protection cup			
Max. Actuation speed		Code			
Min. force or torque		PS31L-   PG-T00			
Weight					

			S11 		T11 		O11 		T02 		
			T20 		S02 		T12 		T21 		
			T03 		T30 						
Conformity /  (NC)			One way lever								
Max. Actuation speed			Code Ø22 nylon roller								
Min. force or torque			Ø22 stainless steel roller								
Weight			Ø22 steel ball bearing								
			PS31L-RH-T00								
			PS31L-RK-T00								
			PS31L-RB-T00								

					
					
					
Conformity / 		/ 		One way lever with dust protection cup	
Max. Actuation speed		1.0ms		Code Ø22 nylon roller	
Min. force or torque		8N / 30Nm		Ø22 stainless steel roller	
Weight		180g		Ø22 steel ball bearing	
				PS31L-   RJ-T00	
				PS31L-   RY-T00	
				PS31L-   RC-T00	

					
					
					
Conformity /  (NC)		EN 50041 / 		Ø22 Roller lever Code nylon roller stainless steel roller steel ball bearing	
Max. Actuation speed		1.5ms			
Min. force or torque		0.15N / 0.30Nm			
Weight		200g			
				PS31L-RT-T00	
				PS31L-RS-T00	
				PS31L-RO-T00	

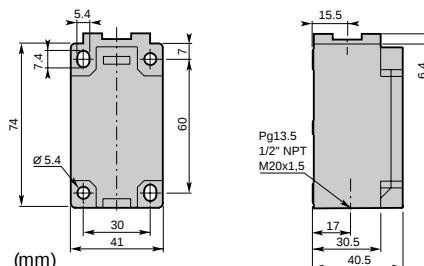
						
						
						
Conformity /  (NC)			Ø50 Rubber roller lever			
Max. Actuation speed			Code			
1.5ms			PS31L-   W0-T00			
Min. force or torque						
0.15N / 0.30Nm						
Weight						
205g						

Limit Switches - Limit Type (PS31) Plastic Body IP65

CARLO GAVAZZI

■ Cable Gland

P = one cable inlet PG13.5 cable gland
M = one cable inlet M20x1.5 cable gland
N = one cable inlet 1/2" NPT cable gland



▲ Contact block (Zb type)

S11 (1NO+1NC) Snap action	T11 (1NO+1NC) Non overlapping Slow action	O11 (1NO+1NC) Overlapping Slow action	T02 (2NC) Slow Action	T20 (2NO) Slow action
S02 (2NC) Snap action	T12 (1NO+2NC) Non overlapping Slow action	T21 (2NO+1NC) Non overlapping Slow action	T03 (3NC) Simultaneous Slow action	T30 (3NO) Simultaneous Slow action

S11	T11	O11	T02	
T20	S02	T12	T21	
T03	T30			

Conformity / (NC)

Max. Actuation speed 1.5ms

Min. force or torque 0.15N / 0.30Nm

Weight 195g

Adjustable Ø22 roller lever

Code nylon lever
 stainless steel roller
 steel ball bearing

PS31L-R1-T00
 PS31L-R2-T00
 PS31L-R3-T00

S11	T11	O11	T02	
T20	S02	T12	T21	
T03	T30			

Conformity / (NC)

Max. Actuation speed 1.5ms

Min. force or torque 0.15N / 0.30Nm

Weight 205g

Adjustable Ø50 rubber roller lever

Code

PS31L-W1-T00

S11	T11	O11	T02	
T20	S02	T12	T21	
T03	T30			

Conformity / (NC)

Max. Actuation speed 1.5ms

Min. force or torque 0.15N / -

Weight 190g

Nylon actuator with stainless steel spring

Code

PS31L-LB-T00

S11	T11	O11	T02	
T20	S02	T12	T21	
T03	T30			

Conformity / (NC)

Max. Actuation speed 1.5ms

Min. force or torque 0.15N / -

Weight 195g

Stainless steel spring actuator

Code

PS31L-LZ-T00

		S11 0 19° 31° 47° 90° 21-22 13-14 21-22 13-14	T11 0 21° 37° 90° 21-22 13-14 30°	O11 0 34° 50° 90° 21-22 13-14 19°	T02 0 19° 35° 90° 11-12 21-22
		T20 0 18° 90° 13-14 23-24	S02 0 19° 30° 46° 90° 11-12 21-22 11-12 21-22	T12 0 16° 33° 90° 21-22 13-14 35°	T21 0 17° 34° 90° 31-32 13-14 23-24 35°
		T03 0 16° 33° 90° 11-12 21-22 31-32	T30 0 21° 90° 13-14 23-24 33-34		

Conformity / (NC) / (NC)
 Max. Actuation speed 1.5ms
 Min. force or torque 0.15N / 0.30
 Weight 185g

Adjustable rod lever
 Code stainless steel rod Ø3
 fiberglass rod Ø3
 square steel rod 3x3

PS31L- LA-T00
 PS31L- LF-T00
 PS31L- L3-T00

		S11 0 19° 31° 47° 90° 21-22 13-14 21-22 13-14	T11 0 21° 37° 90° 21-22 13-14 30°	O11 0 34° 50° 90° 21-22 13-14 19°	T02 0 19° 35° 90° 11-12 21-22
		T20 0 18° 90° 13-14 23-24	S02 0 19° 30° 46° 90° 11-12 21-22 11-12 21-22	T12 0 16° 33° 90° 21-22 13-14 35°	T21 0 17° 34° 90° 31-32 13-14 23-24 35°
		T03 0 16° 33° 90° 11-12 21-22 31-32	T30 0 21° 90° 13-14 23-24 33-34		

Conformity / (NC) / (NC)
 Max. Actuation speed 1.5ms
 Min. force or torque 0.15N / 0.30Nm
 Weight 185g

Adjustable Ø6 rod lever
 Code nylon rod
 fiberglass rod

PS31L- LN-T00
 PS31L- LG-T00

		S11 0 15° 27° 21-22 13-14 21-22 13-14	T11 0 18° 25° 21-22 13-14	O11 0 30° 17° 21-22 13-14	T02 0 17° 11-12 21-22
		T20 0 16° 13-14 23-24	S02 0 15° 26° 11-12 21-22 11-12 21-22	T12 0 15° 32° 21-22 13-14	T21 0 16° 32° 31-32 13-14 23-24
		T03 0 15° 11-12 21-22 31-32	T30 0 19° 13-14 23-24 33-34		

Conformity / (NC) /
 Max. Actuation speed 1.0ms
 Min. force or torque 0.18N / -
 Weight 150g

Stainless steel spring multidirectional actuator
 Code

PS31L- LW-T00

		S11 0 15° 27° 21-22 13-14 21-22 13-14	T11 0 18° 25° 21-22 13-14	O11 0 30° 17° 21-22 13-14	T02 0 17° 11-12 21-22
		T20 0 16° 13-14 23-24	S02 0 15° 26° 11-12 21-22 11-12 21-22	T12 0 15° 32° 21-22 13-14	T21 0 16° 32° 31-32 13-14 23-24
		T03 0 15° 11-12 21-22 31-32	T30 0 19° 13-14 23-24 33-34		

Conformity / (NC) /
 Max. Actuation speed 1.0ms
 Min. force or torque 0.18N / -
 Weight 155g

Multidirectional nylon actuator with stainless steel spring
 Code

PS31L- LP-T00

		S11 0 15° 27° 21-22 13-14 21-22 13-14	T11 0 18° 25° 21-22 13-14	O11 0 30° 17° 21-22 13-14	T02 0 17° 11-12 21-22
		T20 0 16° 13-14 23-24	S02 0 15° 26° 11-12 21-22 11-12 21-22	T12 0 15° 32° 21-22 13-14	T21 0 16° 32° 31-32 13-14 23-24
		T03 0 15° 11-12 21-22 31-32	T30 0 19° 13-14 23-24 33-34		

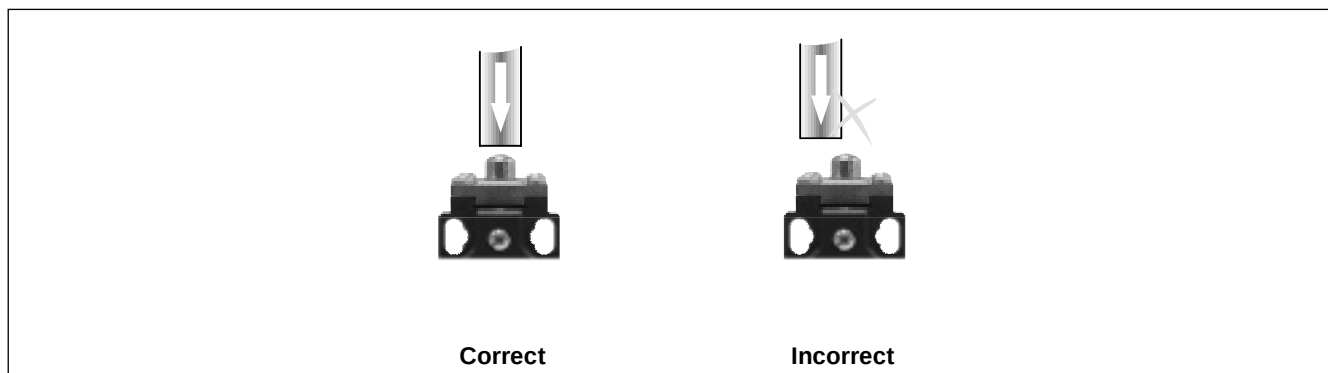
Conformity / (NC) /
 Max. Actuation speed 1.0ms
 Min. force or torque 0.18N / -
 Weight 160g

Stainless steel spring multidirectional actuator
 Code

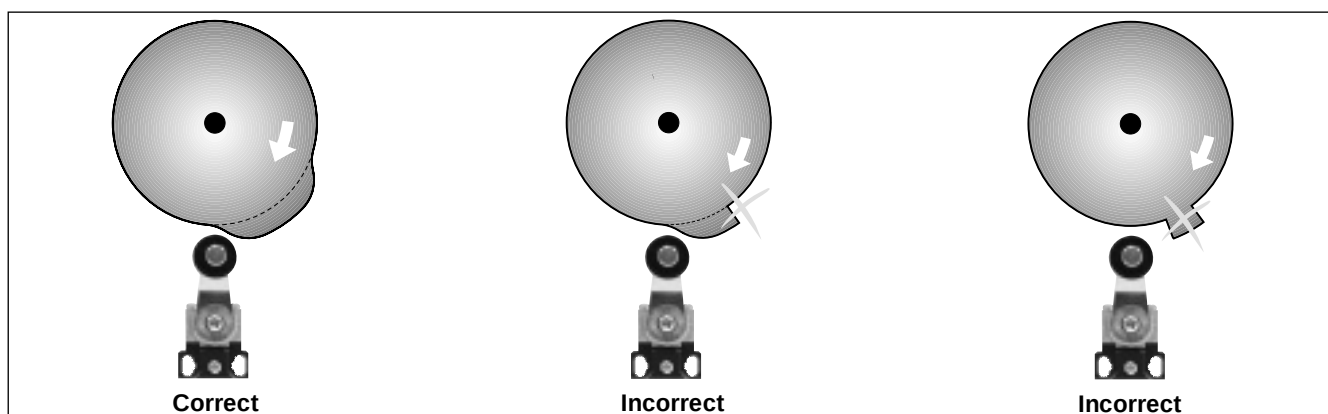
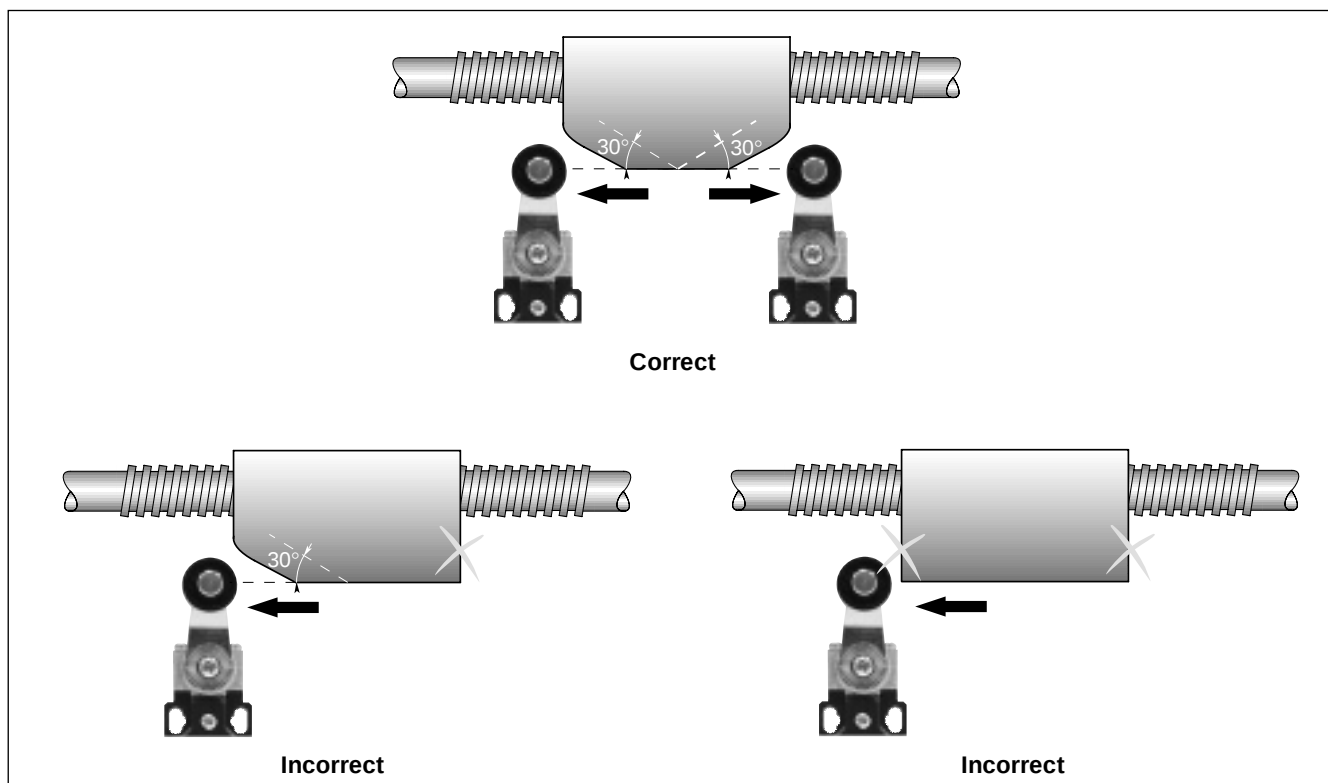
PS31L- LS-T00

Utilization precautions

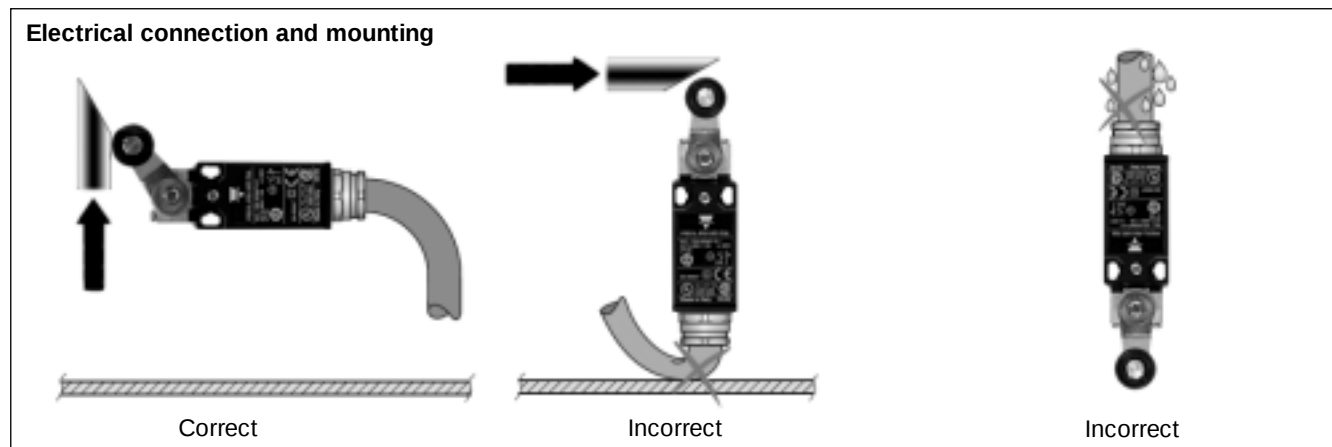
Plain plunger



Roller plunger or Roller lever



Utilization precautions



Adjustment

