

# Limit Switches - Limit Type Metal Body IP66

CARLO GAVAZZI



- High mechanical resistance
- Degree of protection IP66
- Aluminium body
- Positive Opening Operation ➞
- Minimum Actuation Force/Torque
- Minimum Force to achieve Positive Opening Operation
- Precise operating points (consistency)
- Immune to electromagnetic disturbances
- Zb type contact blocks
- Current Ith = 10A
- Rated insulation voltage Ui = 500V
- UL, CSA, CE
- Conform with IEC 947-5-1 (EN 60947-5-1)

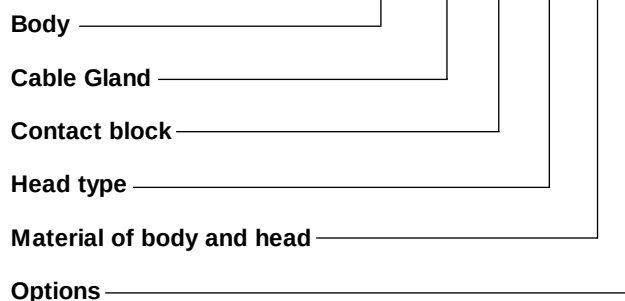
## Product Description

They are developed in order to be used for following operations:

- Presence/Absence
- Positioning and travel limit
- Objects passing/counting

## Ordering Key

**PS43L-PS11RT-M00**



## Description of the key codes

### Body

PS43L | PS 60mm (fix 40/42mm) 3 cable inlet for General Purpose

### Cable Gland

M | M20  
P | PG13.5  
N | 1/2 NPT

### Contact block

O11 | 1NO+1NC overlap slow(+)  
S02 | 2NC snap(+)  
S11 | 1NO+1NC snap(+)  
T02 | 2NC slow(+)  
T03 | 3NC slow(+)  
T11 | 1NO+1NC slow(+)  
T12 | 1NO+2NC slow(+)  
T20 | 2NO slow  
T21 | 2NO+1NC slow(+)  
T30 | 3NO slow

### Material of body and head

M | Metal Body and Metal head

### Options

00 | no option

### Head type

L3 | adj square (3x3) steel rod LEVER  
LA | adj Ø3 rod LEVER stainless steel rod  
LB | nylon actuator with stainless steel spring  
LF | adj fiberglass rod LEVER Ø3  
LG | adj fiberglass rod LEVER Ø6  
LN | adj nylon rod LEVER  
LP | multidir nylon actuator with stainless steel spring  
LS | stainless steel spring multidir actuator  
LW | Stainless stell spring multidir actuator (cat Whisker)  
LZ | Stainless stell spring actuator  
N6 | pull wire for simple stop  
P0 | metal plain PLUNGER  
PB | steel ball PLUNGER  
PR | metal roller PLUNGER  
R1 | adj LEVER with nylon roller  
R2 | adj LEVER with stainless stell roller  
R3 | adj LEVER with stell ball bearing  
RB | one way LEVER steel ball bearing  
RH | plastic roller LEVER on metal PLUNGER (left)  
RK | one way LEVER stainless steel roller  
RO | roller LEVER steel ball bearing  
RS | metal roller LEVER  
RT | nylon roller LEVER  
SH | stainless steel lateral PLUNGER with horizontal roller  
SP | stainless steel lateral plain PLUNGER  
SV | stainless steel lateral PLUNGER with vertical roller  
W0 | Ø50 rubber roller LEVER  
W1 | adj LEVER with Ø50 rubber roller

## Technical Data

### Standards

#### Certifications – Approvals

**Air temperature** near the device

- during operation °C
- for storage °C

#### Climatic withstand

#### Mounting positions

**Shock withstand** (according to IEC 68-2-27 and 60068-2-27) g  
(1/2sinusoidal shock for 11 ms) no change in contact position

**Resistance to vibrations** (acc.to IEC 68-2-6 and EN 60068-2-6) g

**Protection against electrical shocks** (acc.to IEC 536)

**Degree of protection** (according to IEC 529 and EN 60529)

**Consistency** (measured over 1 million operations)

IEC 60947-1, IEC 60947-5-1, EN 60947-1, EN 60947-5-1,  
UL508 and CSA C22-2 n°14

UL – CSA

-25 ... +70

-30 ... +80

According to IEC 68-2-3 and salty mist according to IEC 68-2-11  
All positions are authorized

50g\*

25g (10...500Hz) no change in position of contacts greater  
than 100µs

Class I

IP66

0.1 mm (upon closing point)

\* except for PS21/PS42 with head type W0, W1: 25g.

## Electrical Data

### Rated insulation voltage $U_i$

-according to IEC 60947-1 and EN 60947-1

-according to UL 508, CSA C22-2 n°14

**Rated impulse withstand voltage  $U_{imp}$**  kV

(according to IEC 60947-1 and EN 60947-1)

**Conventional enclosed thermal current  $I_{the}$**  A

(according to IEC 60947-5-1 and EN 60947-5-1) ( $\theta \leq 40^\circ\text{C}$ )

**Short-circuit protection - gG type fuses** A

### Rated operational current

**$I_e$  / AC-15** - acc.to IEC 60947-5-1

|                   |   |
|-------------------|---|
| 24Vac (50/60 Hz)  | A |
| 130Vac (50/60 Hz) | A |
| 230Vac (50/60 Hz) | A |
| 240Vac (50/60 Hz) | A |
| 400Vac (50/60 Hz) | A |

- acc.to UL 508, CSA C22 n°14

**$I_e$  / DC-13** - acc.to IEC 60947-5-1

|        |   |
|--------|---|
| 24Vdc  | A |
| 110Vdc | A |
| 250Vdc | A |

- acc.to UL 508, CSA C22 n°14

### Electrical durability (according to IEC 60497-5-1 annex C)

- max. switching frequency Cycles/h
- load factor

### Connecting data of contact blocks

Connecting terminals

Connecting capacity 1 or 2 x mm<sup>2</sup> / AWG

Terminal marking

Positivity

400V (PS21, PS42), 500V (PS31, PS43) (degree of pollution 3)

A 300 Q 300 (PS21, PS42), A 600 Q 600 (PS31, PS43)

6

10

10

10

5.5

3.1

3

1.8

A 300 (PS21, PS42), A 600 (PS31, PS43)

2.8

0.6

0,27

Q 300 (PS21, PS42), Q 600 (PS31, PS43)

Utilization categories AC-15 and DC-13 (see curves and value below)

3600

0,5


M3,5 (+,-) pozidriv 2 screw with cable clamp

0,5mm<sup>2</sup> / AWG 20 to 2,5mm<sup>2</sup> / AWG 14


According to EN 50013

Contacts with positive opening operation as per  
IEC 60947-5-1 chapter 3

### Diagram for snap action contact:



### Diagram for slow action contact:



### Electrical durability for DC-13 utilization category

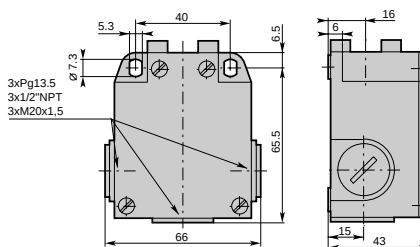
| Power breaking for a durability of 5 million operating cycles |             |             |
|---------------------------------------------------------------|-------------|-------------|
|                                                               | Snap action | Slow action |
| Voltage 24V                                                   | 9,5W        | 12W         |
| Voltage 48V                                                   | 6,8W        | 9W          |
| Voltage 110V                                                  | 3,6W        | 6W          |

# Limit Switches - Limit Type (PS43) Metal Body IP66

CARLO GAVAZZI

## ■ Cable Gland

**P** = Three cable inlet PG13.5 cable gland  
**M** = Three cable inlet M20x1.5 cable gland  
**N** = Three cable inlet 1/2" NPT cable gland



## ▲ Contact block (Zb type)

(mm)

|                                     |                                                        |                                                        |                                                 |                                                 |
|-------------------------------------|--------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| <b>S11</b> (1NO+1NC)<br>Snap action | <b>T11</b> (1NO+1NC)<br>Non overlapping<br>Slow action | <b>O11</b> (1NO+1NC)<br>Overlapping<br>Slow action     | <b>T02</b> (2NC)<br>Slow Action                 | <b>T20</b> (2NO)<br>Slow action                 |
| <b>S02</b> (2NC)<br>Snap action     | <b>T12</b> (1NO+2NC)<br>Non overlapping<br>Slow action | <b>T21</b> (2NO+1NC)<br>Non overlapping<br>Slow action | <b>T03</b> (3NC)<br>Simultaneous<br>Slow action | <b>T30</b> (3NO)<br>Simultaneous<br>Slow action |

|  |  |  |                                    |                                    |                                |                                |
|--|--|--|------------------------------------|------------------------------------|--------------------------------|--------------------------------|
|  |  |  | <b>S11</b><br>0 1.8 3.0 4.6 6.0 mm | <b>T11</b><br>0 2.1 3.7 6.0 mm     | <b>O11</b><br>0 3.4 5.0 6.0 mm | <b>T02</b><br>0 2.0 3.6 6.0 mm |
|  |  |  | <b>T20</b><br>0 1.9 6.0 mm         | <b>S02</b><br>0 1.8 2.9 4.5 6.0 mm | <b>T12</b><br>0 2.0 3.5 6.0 mm | <b>T21</b><br>0 2.1 3.6 6.0 mm |
|  |  |  | <b>T03</b><br>0 2.0 3.5 6.0 mm     | <b>T30</b><br>0 2.3 6.0 mm         |                                |                                |

**Conformity / (NC)** / (NC)  
**Max. Actuation speed** 0.5ms  
**Min. force or torque** 30N / 45Nm  
**Weight** 265g

**Stainless steel plain plunger**  
**Code**

PS43L- ■▲P0-M00

|  |  |  |                                    |                                    |                                |                                |
|--|--|--|------------------------------------|------------------------------------|--------------------------------|--------------------------------|
|  |  |  | <b>S11</b><br>0 1.8 3.0 4.6 6.0 mm | <b>T11</b><br>0 2.1 3.7 6.0 mm     | <b>O11</b><br>0 3.4 5.0 6.0 mm | <b>T02</b><br>0 2.0 3.6 6.0 mm |
|  |  |  | <b>T20</b><br>0 1.9 6.0 mm         | <b>S02</b><br>0 1.8 2.9 4.5 6.0 mm | <b>T12</b><br>0 2.0 3.5 6.0 mm | <b>T21</b><br>0 2.1 3.6 6.0 mm |
|  |  |  | <b>T03</b><br>0 2.0 3.5 6.0 mm     | <b>T30</b><br>0 2.3 6.0 mm         |                                |                                |

**Conformity / (NC)** / (NC)  
**Max. Actuation speed** 0.5ms  
**Min. force or torque** 30N / 45Nm  
**Weight** 265g

**Stainless steel ball plunger**  
**Code**

PS43L- ■▲PB-M00

|  |  |  |                                     |                                     |                                 |                                 |
|--|--|--|-------------------------------------|-------------------------------------|---------------------------------|---------------------------------|
|  |  |  | <b>S11</b><br>0 3.1 5.3 8.2 10.5 mm | <b>T11</b><br>0 4.0 6.9 10.5 mm     | <b>O11</b><br>0 6.0 8.9 10.5 mm | <b>T02</b><br>0 3.7 6.6 10.5 mm |
|  |  |  | <b>T20</b><br>0 3.5 10.5 mm         | <b>S02</b><br>0 3.1 5.1 8.0 10.5 mm | <b>T12</b><br>0 3.8 6.3 10.5 mm | <b>T21</b><br>0 3.9 6.4 10.5 mm |
|  |  |  | <b>T03</b><br>0 3.8 6.3 10.5 mm     | <b>T30</b><br>0 4.3 10.5 mm         |                                 |                                 |

**Conformity / (NC)** / (NC)  
**Max. Actuation speed** 0.5ms  
**Min. force or torque** 22N / 40Nm  
**Weight** 270g

**Stainless steel Ø12 roller plunger**  
**Code**


PS43L- ■▲PR-M00

|  |  |  |                                    |                                    |                                |                                |
|--|--|--|------------------------------------|------------------------------------|--------------------------------|--------------------------------|
|  |  |  | <b>S11</b><br>0 2.0 3.2 4.8 6.0 mm | <b>T11</b><br>0 2.3 3.9 6.0 mm     | <b>O11</b><br>0 3.6 5.2 6.0 mm | <b>T02</b><br>0 2.2 3.8 6.0 mm |
|  |  |  | <b>T20</b><br>0 2.1 6.0 mm         | <b>S02</b><br>0 2.0 3.1 4.7 6.0 mm | <b>T12</b><br>0 1.4 2.9 6.0 mm | <b>T21</b><br>0 1.5 3.0 6.0 mm |
|  |  |  | <b>T03</b><br>0 1.4 2.9 6.0 mm     | <b>T30</b><br>0 1.9 6.0 mm         |                                |                                |

**Conformity / (NC)** / (NC)  
**Max. Actuation speed** 0.5ms  
**Min. force or torque** 30N / 50Nm  
**Weight** 285g


**Stainless steel lateral plain plunger**  
**Code**

PS43L- ■▲SP-M00

|                                                                                   |                                                                                   |                                                                |                                                                         |                                                          |                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------|
|  |  | <b>S11</b><br>0 3.7 5.9 8.8 10.2 mm<br>21-22<br>13-14<br>13-14 | <b>T11</b><br>0 4.6 7.5 10.2 mm<br>21-22<br>13-14<br>6.0                | <b>O11</b><br>0 6.6 9.5 10.2 mm<br>21-22<br>13-14<br>4.3 | <b>T02</b><br>0 4.3 7.2 10.2 mm<br>11-12<br>21-22                 |
|                                                                                   |                                                                                   | <b>T20</b><br>0 4.1 10.2 mm<br>13-14<br>23-24                  | <b>S02</b><br>0 3.5 5.7 8.6 10.2 mm<br>11-12<br>21-22<br>11-12<br>21-22 | <b>T12</b><br>0 3.5 6.1 10.2 mm<br>21-22<br>13-14<br>6.2 | <b>T21</b><br>0 3.6 6.2 10.2 mm<br>31-32<br>13-14<br>23-24<br>6.2 |
|                                                                                   |                                                                                   | <b>T03</b><br>0 3.5 6.1 10.2 mm<br>11-12<br>21-22<br>31-32     | <b>T30</b><br>0 4.0 10.2 mm<br>13-14<br>23-24<br>33-34                  |                                                          |                                                                   |


Conformity / (NC) / (NC)  
Max. Actuation speed 0.5ms  
Min. force or torque 30N / 50Nm  
Weight 290g

Stainless steel lateral plunger with Ø12 vertical roller  
Code PS43L-   SV-M00

|                                                                                   |                                                                                   |                                                                |                                                                         |                                                          |                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------|
|  |  | <b>S11</b><br>0 3.7 5.9 8.8 10.2 mm<br>21-22<br>13-14<br>13-14 | <b>T11</b><br>0 4.6 7.5 10.2 mm<br>21-22<br>13-14<br>6.0                | <b>O11</b><br>0 6.6 9.5 10.2 mm<br>21-22<br>13-14<br>4.3 | <b>T02</b><br>0 4.3 7.2 10.2 mm<br>11-12<br>21-22                 |
|                                                                                   |                                                                                   | <b>T20</b><br>0 4.1 10.2 mm<br>13-14<br>23-24                  | <b>S02</b><br>0 3.5 5.7 8.6 10.2 mm<br>11-12<br>21-22<br>11-12<br>21-22 | <b>T12</b><br>0 3.5 6.1 10.2 mm<br>21-22<br>13-14<br>6.2 | <b>T21</b><br>0 3.6 6.2 10.2 mm<br>31-32<br>13-14<br>23-24<br>6.2 |
|                                                                                   |                                                                                   | <b>T03</b><br>0 3.5 6.1 10.2 mm<br>11-12<br>21-22<br>31-32     | <b>T30</b><br>0 4.0 10.2 mm<br>13-14<br>23-24<br>33-34                  |                                                          |                                                                   |

Conformity / (NC) / (NC)  
Max. Actuation speed 0.5ms  
Min. force or torque 30N / 50Nm  
Weight 290g


Stainless steel lateral plunger with Ø12 horizontal roller  
Code PS43L-   SH-M00

|                                                                                     |                                                                                     |                                                                 |                                                                          |                                                           |                                                                   |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------|
|  |  | <b>S11</b><br>0 3.1 6.3 10.8 15.5 mm<br>21-22<br>13-14<br>13-14 | <b>T11</b><br>0 4.5 9.0 15.5 mm<br>21-22<br>13-14<br>6.1                 | <b>O11</b><br>0 7.2 11.7 15.5 mm<br>21-22<br>13-14<br>4.0 | <b>T02</b><br>0 4.0 9.5 15.5 mm<br>11-12<br>21-22                 |
|                                                                                     |                                                                                     | <b>T20</b><br>0 3.6 15.5 mm<br>13-14<br>23-24                   | <b>S02</b><br>0 3.1 6.1 10.6 15.5 mm<br>11-12<br>21-22<br>11-12<br>21-22 | <b>T12</b><br>0 4.6 8.4 15.5 mm<br>21-22<br>13-14<br>8.6  | <b>T21</b><br>0 4.7 8.5 15.5 mm<br>31-32<br>13-14<br>23-24<br>8.6 |
|                                                                                     |                                                                                     | <b>T03</b><br>0 4.6 8.4 15.5 mm<br>11-12<br>21-22<br>31-32      | <b>T30</b><br>0 4.9 15.5 mm<br>13-14<br>23-24<br>33-34                   |                                                           |                                                                   |

Conformity / (NC) / (NC)  
Max. Actuation speed 1.5ms  
Min. force or torque 12N / 40Nm  
Weight 305g

One way lever  
Code Ø22 nylon roller  
Ø22 stainless steel roller  
Ø22 steel ball bearing


PS43L-   RH-M00  
PS43L-   RK-M00  
PS43L-   RB-M00

|                                                                                     |                                                                                     |                                                            |                                                                     |                                                      |                                                               |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------|---------------------------------------------------------------------|------------------------------------------------------|---------------------------------------------------------------|
|  |  | <b>S11</b><br>0 20° 33° 49° 78°<br>21-22<br>13-14<br>13-14 | <b>T11</b><br>0 22° 38° 78°<br>21-22<br>13-14<br>33°                | <b>O11</b><br>0 37° 53° 78°<br>21-22<br>13-14<br>21° | <b>T02</b><br>0 21° 37° 78°<br>11-12<br>21-22                 |
|                                                                                     |                                                                                     | <b>T20</b><br>0 20° 78°<br>13-14<br>23-24                  | <b>S02</b><br>0 20° 32° 48° 78°<br>11-12<br>21-22<br>11-12<br>21-22 | <b>T12</b><br>0 18° 35° 78°<br>21-22<br>13-14<br>37° | <b>T21</b><br>0 19° 36° 78°<br>31-32<br>13-14<br>23-24<br>37° |
|                                                                                     |                                                                                     | <b>T03</b><br>0 18° 35° 78°<br>11-12<br>21-22<br>31-32     | <b>T30</b><br>0 23° 78°<br>13-14<br>23-24<br>33-34                  |                                                      |                                                               |

Conformity / (NC) / (NC)  
Max. Actuation speed 1.5ms  
Min. force or torque 0.15N / 0.30Nm  
Weight 305g

Ø22 Roller lever  
Code nylon roller  
stainless steel roller  
steel ball bearing

PS43L-   RT-M00  
PS43L-   RS-M00  
PS43L-   RO-M00

|                                                                                     |                                                                                     |                                                            |                                                                     |                                                      |                                                               |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------|---------------------------------------------------------------------|------------------------------------------------------|---------------------------------------------------------------|
|  |  | <b>S11</b><br>0 20° 33° 49° 78°<br>21-22<br>13-14<br>13-14 | <b>T11</b><br>0 22° 38° 78°<br>21-22<br>13-14<br>33°                | <b>O11</b><br>0 37° 53° 78°<br>21-22<br>13-14<br>21° | <b>T02</b><br>0 21° 37° 78°<br>11-12<br>21-22                 |
|                                                                                     |                                                                                     | <b>T20</b><br>0 20° 78°<br>13-14<br>23-24                  | <b>S02</b><br>0 20° 32° 48° 78°<br>11-12<br>21-22<br>11-12<br>21-22 | <b>T12</b><br>0 18° 35° 78°<br>21-22<br>13-14<br>37° | <b>T21</b><br>0 19° 36° 78°<br>31-32<br>13-14<br>23-24<br>37° |
|                                                                                     |                                                                                     | <b>T03</b><br>0 18° 35° 78°<br>11-12<br>21-22<br>31-32     | <b>T30</b><br>0 23° 78°<br>13-14<br>23-24<br>33-34                  |                                                      |                                                               |

Conformity / (NC) / (NC)  
Max. Actuation speed 1.5ms  
Min. force or torque 0.15N / 0.30Nm  
Weight 315g

Ø50 Rubber roller lever  
Code

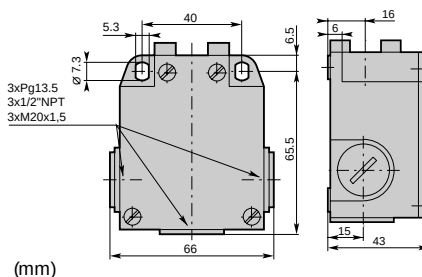
PS43L-   W0-M00

# Limit Switches - Limit Type (PS43) Metal Body IP66

CARLO GAVAZZI

## ■ Cable Gland

**P** = Three cable inlet PG13.5 cable gland  
**M** = Three cable inlet M20x1.5 cable gland  
**N** = Three cable inlet 1/2" NPT cable gland



## ▲ Contact block (Zb type)

|                                     |                                                        |                                                        |                                                 |                                                 |
|-------------------------------------|--------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| <b>S11</b> (1NO+1NC)<br>Snap action | <b>T11</b> (1NO+1NC)<br>Non overlapping<br>Slow action | <b>O11</b> (1NO+1NC)<br>Overlapping<br>Slow action     | <b>T02</b> (2NC)<br>Slow Action                 | <b>T20</b> (2NO)<br>Slow action                 |
| <b>S02</b> (2NC)<br>Snap action     | <b>T12</b> (1NO+2NC)<br>Non overlapping<br>Slow action | <b>T21</b> (2NO+1NC)<br>Non overlapping<br>Slow action | <b>T03</b> (3NC)<br>Simultaneous<br>Slow action | <b>T30</b> (3NO)<br>Simultaneous<br>Slow action |

|            |            |            |            |  |
|------------|------------|------------|------------|--|
|            |            |            |            |  |
| <b>S11</b> | <b>T11</b> | <b>O11</b> | <b>T02</b> |  |
| <b>T20</b> | <b>S02</b> | <b>T12</b> | <b>T21</b> |  |
| <b>T03</b> | <b>T30</b> |            |            |  |

Conformity / (NC)

Max. Actuation speed 1.5ms

Min. force or torque 0.15N / 0.30Nm

Weight 325g

Adjustable Ø22 roller lever

Code nylon lever  
 stainless steel roller  
 steel ball bearing

PS43L- R1-M00  
 PS43L- R2-M00  
 PS43L- R3-M00

|            |            |            |            |  |
|------------|------------|------------|------------|--|
|            |            |            |            |  |
| <b>S11</b> | <b>T11</b> | <b>O11</b> | <b>T02</b> |  |
| <b>T20</b> | <b>S02</b> | <b>T12</b> | <b>T21</b> |  |
| <b>T03</b> | <b>T30</b> |            |            |  |

Conformity / (NC)

Max. Actuation speed 1.5ms

Min. force or torque 0.15N / 0.30Nm

Weight 330g

Adjustable Ø50 rubber roller lever

Code

PS43L- W1-M00

|            |            |            |            |  |
|------------|------------|------------|------------|--|
|            |            |            |            |  |
| <b>S11</b> | <b>T11</b> | <b>O11</b> | <b>T02</b> |  |
| <b>T20</b> | <b>S02</b> | <b>T12</b> | <b>T21</b> |  |
| <b>T03</b> | <b>T30</b> |            |            |  |

Conformity / (NC)

Max. Actuation speed 1.5ms

Min. force or torque 0.15N / -

Weight 330g

Nylon actuator with stainless steel spring

Code

PS43L- LB-M00

|            |            |            |            |  |
|------------|------------|------------|------------|--|
|            |            |            |            |  |
| <b>S11</b> | <b>T11</b> | <b>O11</b> | <b>T02</b> |  |
| <b>T20</b> | <b>S02</b> | <b>T12</b> | <b>T21</b> |  |
| <b>T03</b> | <b>T30</b> |            |            |  |

Conformity / (NC)

Max. Actuation speed 1.5ms











Min. force or torque 0.15N / -









Weight 330g









Stainless steel spring actuator








Code

PS43L- LZ-M00

|                                                                                                            |                                                                                   |                                                                                                 |  |                                                                                                  |                             |                                                                                                   |  |                                                                                                                                                                                              |  |
|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------|-----------------------------|---------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                           |  | <b>S11</b><br> |  | <b>T11</b><br> |                             | <b>O11</b><br> |  | <b>T02</b><br>                                                                                            |  |
|                                                                                                            |                                                                                   | <b>T20</b><br> |  | <b>S02</b><br> |                             | <b>T12</b><br> |  | <b>T21</b><br>                                                                                            |  |
|                                                                                                            |                                                                                   | <b>T03</b><br> |  | <b>T30</b><br> |                             |                                                                                                   |  |                                                                                                                                                                                              |  |
|                                                                                                            |                                                                                   |                                                                                                 |  |                                                                                                  |                             |                                                                                                   |  |                                                                                                                                                                                              |  |
|                                                                                                            |                                                                                   |                                                                                                 |  |                                                                                                  |                             |                                                                                                   |  |                                                                                                                                                                                              |  |
| <b>Conformity /  (NC)</b> |                                                                                   |                                                                                                 |  |                                                                                                  |                             |                                                                                                   |  |                                                                                                                                                                                              |  |
| <b>Max. Actuation speed</b>                                                                                |                                                                                   | 1.5ms                                                                                           |  |                                                                                                  |                             |                                                                                                   |  |                                                                                                                                                                                              |  |
| <b>Min. force or torque</b>                                                                                |                                                                                   | 0.15N / 0.30                                                                                    |  |                                                                                                  |                             |                                                                                                   |  |                                                                                                                                                                                              |  |
| <b>Weight</b>                                                                                              |                                                                                   | 330g                                                                                            |  |                                                                                                  |                             |                                                                                                   |  |                                                                                                                                                                                              |  |
|                                                                                                            |                                                                                   |                                                                                                 |  |                                                                                                  | <b>Adjustable rod lever</b> |                                                                                                   |  |                                                                                                                                                                                              |  |
|                                                                                                            |                                                                                   |                                                                                                 |  |                                                                                                  | <b>Code</b>                 |                                                                                                   |  | stainless steel rod Ø3                                                                                                                                                                       |  |
|                                                                                                            |                                                                                   |                                                                                                 |  |                                                                                                  |                             |                                                                                                   |  | fiberglass rod Ø3                                                                                                                                                                            |  |
|                                                                                                            |                                                                                   |                                                                                                 |  |                                                                                                  |                             |                                                                                                   |  | <b>PS43L-   LA-M00</b> |  |
|                                                                                                            |                                                                                   |                                                                                                 |  |                                                                                                  |                             |                                                                                                   |  | <b>PS43L-   LF-M00</b> |  |

|                                                                                   |                                                                                   |                                                                                                            |                                                                                    |                                                                                                                                                                                              |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |                           |  |                                                                                                           |  |
|                                                                                   |                                                                                   |                           |  |                                                                                                           |  |
|                                                                                   |                                                                                   |                           |  |                                                                                                                                                                                              |                                                                                     |
|                                                                                   |                                                                                   | <b>Conformity /  (NC)</b> |                                                                                    | <b>Adjustable rod lever</b>                                                                                                                                                                  |                                                                                     |
| <b>Max. Actuation speed</b> 1.5ms                                                 |                                                                                   | <b>Code</b> square steel rod 3x3                                                                           |                                                                                    | <b>PS43L-   L3-M00</b> |                                                                                     |
| <b>Min. force or torque</b> 0.15N / 0.30                                          |                                                                                   |                                                                                                            |                                                                                    |                                                                                                                                                                                              |                                                                                     |
| <b>Weight</b> 330g                                                                |                                                                                   |                                                                                                            |                                                                                    |                                                                                                                                                                                              |                                                                                     |

|                                                                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |                                                                                                                                                                                                                                                                                                                                  |  |  |  |
|                                                                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                  |  |  |  |
|                                                                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                  |  |                                                                                       |                                                                                       |
|                                                                                     |                                                                                     | <b>Conformity /  (NC)</b>                                                                                                                                                                                                                                                                                                        |                                                                                      | <b>Adjustable Ø6 rod lever</b>                                                        |                                                                                       |
|                                                                                     |                                                                                     | <b>Max. Actuation speed</b> 1.5ms                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                      | <b>Code</b> nylon rod                                                                 |                                                                                       |
| <b>Min. force or torque</b> 0.15N / 0.30Nm                                          |                                                                                     | fiberglass rod                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                      |                                                                                       |                                                                                       |
| <b>Weight</b> 330g                                                                  |                                                                                     | <div><div>PS43L-   LN-M00</div><div>PS43L-   LG-M00</div></div> |                                                                                      |                                                                                       |                                                                                       |

|                                                                                     |                                                                                     |                                                                                                                                                                                                         |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |                                                                                                                      |  |  |  |
|                                                                                     |                                                                                     |                                                                                                                      |  |  |  |
|                                                                                     |                                                                                     |                                                                                                                      |  |                                                                                       |                                                                                       |
|                                                                                     |                                                                                     | <b>Conformity /</b>                                                                                                  |                                                                                      | <b>Stainless steel spring multidirectional actuator</b>                               |                                                                                       |
|                                                                                     |                                                                                     | <b>Max. Actuation speed</b> 1.0ms                                                                                                                                                                       |                                                                                      | <b>Code</b>                                                                           |                                                                                       |
| <b>Min. force or torque</b> 0.18N / -                                               |                                                                                     | <b>PS43L-</b>   <b>LW-M00</b> |                                                                                      |                                                                                       |                                                                                       |
| <b>Weight</b> 265g                                                                  |                                                                                     |                                                                                                                                                                                                         |                                                                                      |                                                                                       |                                                                                       |

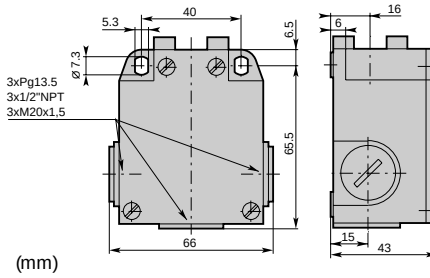
|                                       |  |                                                                    |  |  |  |
|---------------------------------------|--|--------------------------------------------------------------------|--|--|--|
|                                       |  |                                                                    |  |  |  |
|                                       |  |                                                                    |  |  |  |
|                                       |  |                                                                    |  |  |  |
| <b>Conformity /  (NC)</b>             |  | <b>Multidirectional nylon actuator with stainless steel spring</b> |  |  |  |
| <b>Max. Actuation speed</b> 1.0ms     |  | <b>Code</b>                                                        |  |  |  |
| <b>Min. force or torque</b> 0.18N / - |  | <b>PS43L-   LP-M00</b>                                             |  |  |  |
| <b>Weight</b> 265g                    |  |                                                                    |  |  |  |

## Metal Body IP66



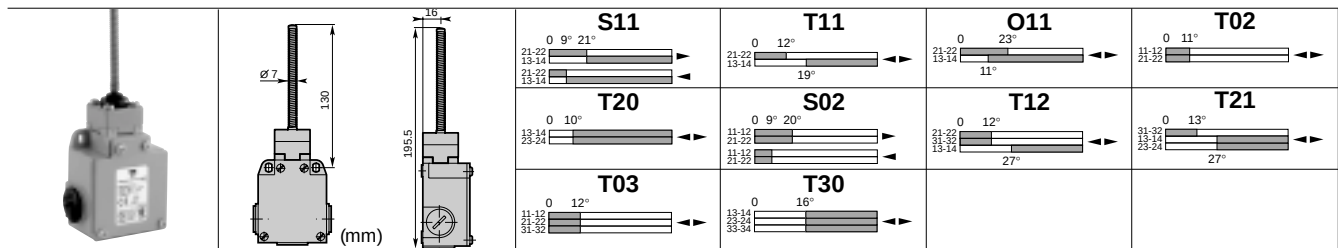
**● Cable Gland**

**P** = Three cable inlet PG13.5 cable gland  
**M** = Three cable inlet M20x1.5 cable gland  
**N** = Three cable inlet 1/2" NPT cable gland



**▲ Contact block (Zb type)**

|                                     |                                                                                                                                          |                                                                                                                                          |                                                                                                                                    |                                                                                                                                     |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>S11 (1NO+1NC)</b><br>Snap action |  <b>T11 (1NO+1NC)</b><br>Non overlapping<br>Slow action |  <b>O11 (1NO+1NC)</b><br>Overlapping<br>Slow action     |  <b>T02 (2NC)</b><br>Slow Action                 |  <b>T20 (2NO)</b><br>Slow action                 |
| <b>S02 (2NC)</b><br>Snap action     |  <b>T12 (1NO+2NC)</b><br>Non overlapping<br>Slow action |  <b>T21 (2NO+1NC)</b><br>Non overlapping<br>Slow action |  <b>T03 (3NC)</b><br>Simultaneous<br>Slow action |  <b>T30 (3NO)</b><br>Simultaneous<br>Slow action |



**Conformity /  $\rightarrow$  (NC)**

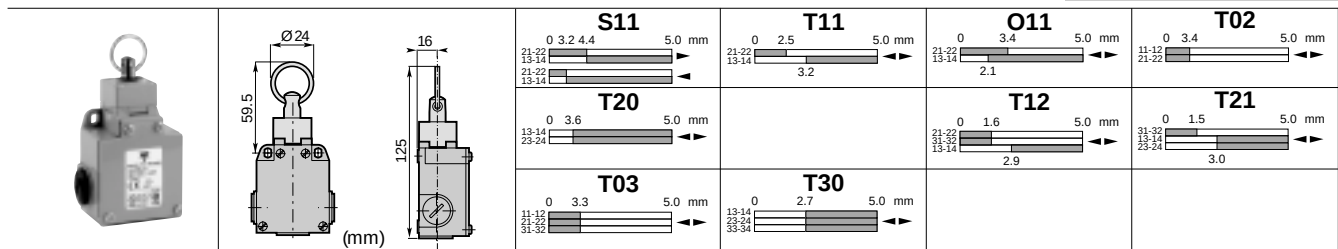
|                             |       |
|-----------------------------|-------|
| <b>Max. Actuation speed</b> | 1.0ms |
|-----------------------------|-------|

|                             |           |
|-----------------------------|-----------|
| <b>Min. force or torque</b> | 0.18N / - |
|-----------------------------|-----------|

|               |      |
|---------------|------|
| <b>Weight</b> | 270g |
|---------------|------|

### Stainless steel spring multidirectional actuator

## Code

PS43L-   LS-M00

**Conformity / → (NC)**

|                      |       |
|----------------------|-------|
| Max. Actuation speed | 0.5ms |
|----------------------|-------|

|                             |         |
|-----------------------------|---------|
| <b>Min. force or torque</b> | 25N / - |
|-----------------------------|---------|

|               |      |
|---------------|------|
| <b>Weight</b> | 270g |
|---------------|------|

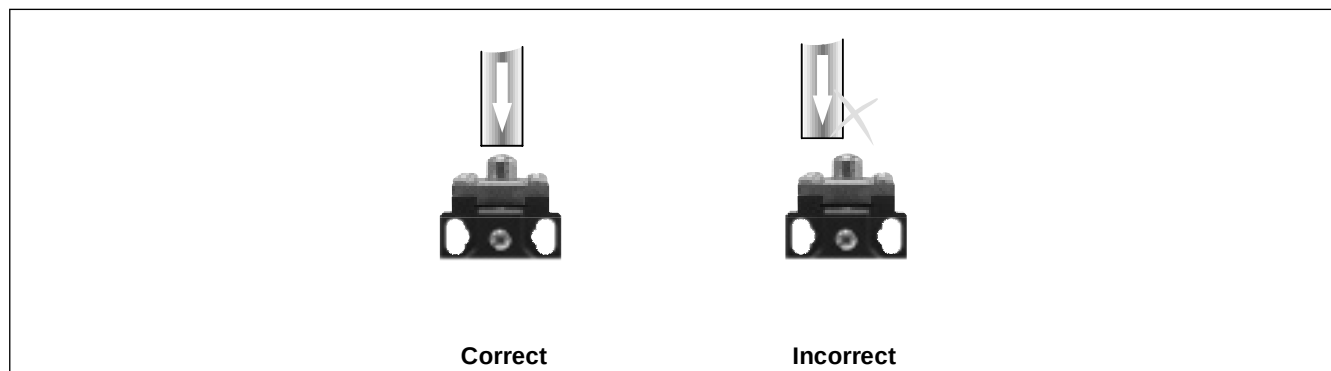
**Pull action with ring**

### Code

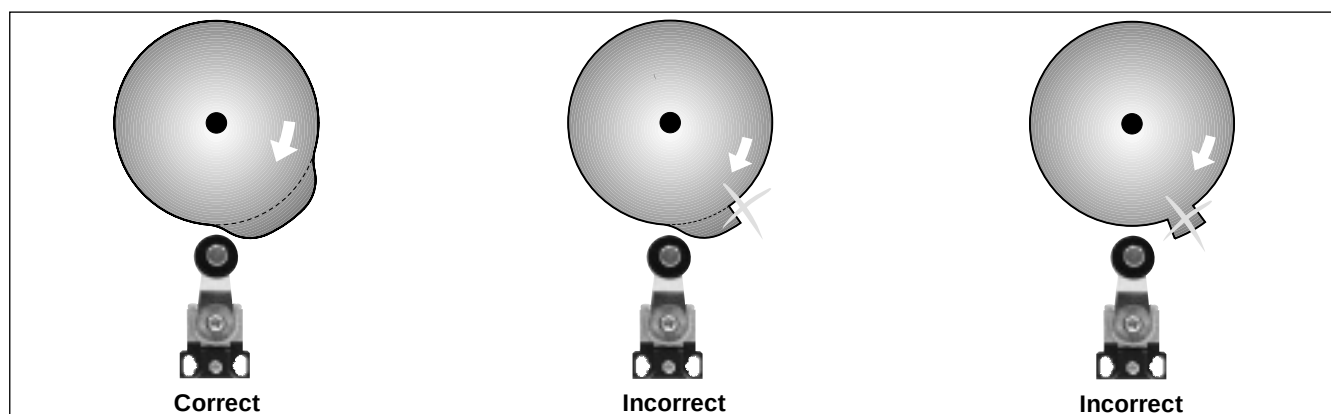
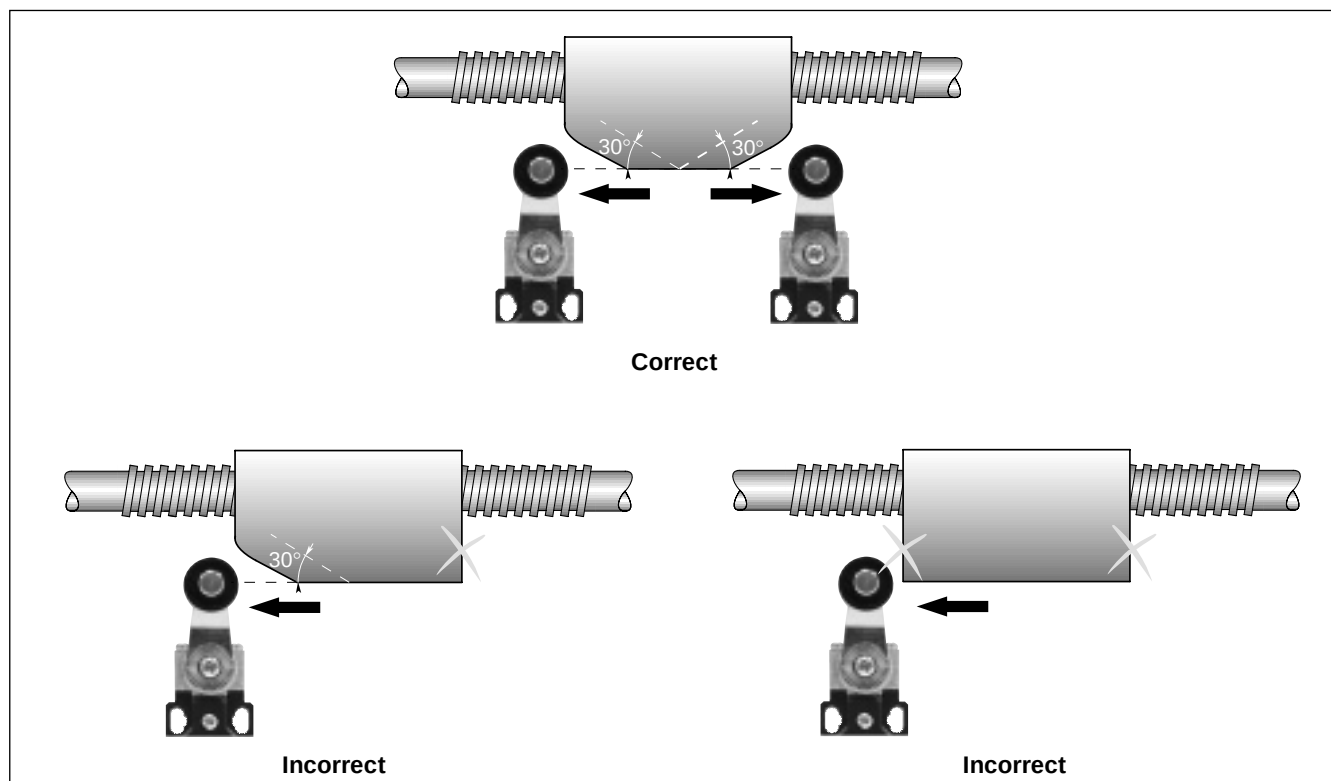
PS43L-   N6-M00

## Utilization precautions

### Plain plunger

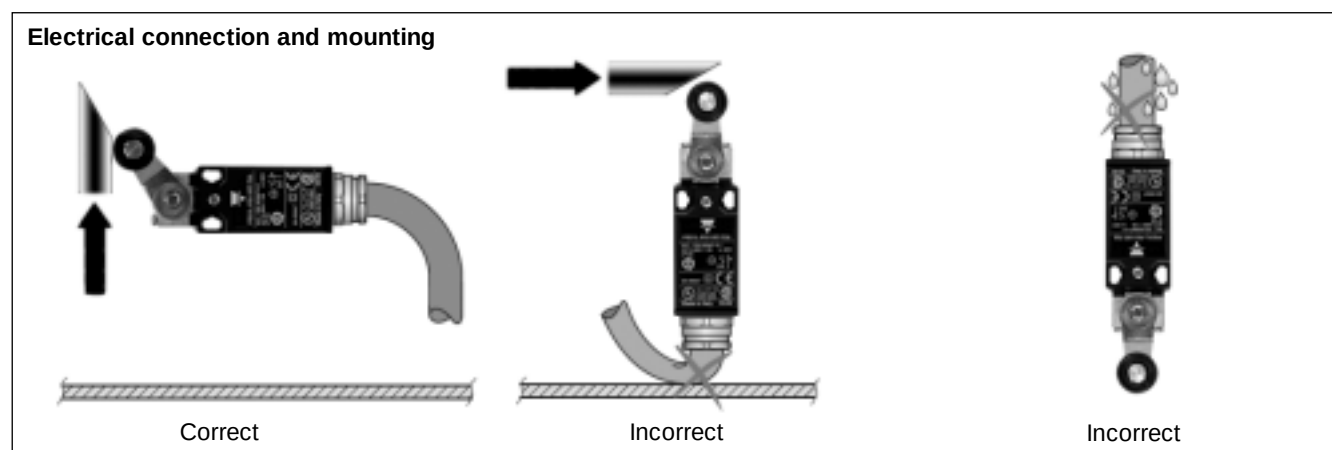


### Roller plunger or Roller lever





## Utilization precautions



## Adjustement

