

Switching Power Supply Type SPD 18W DIN rail mounting

CARLO GAVAZZI



- Universal AC input full range
- Installation on DIN rail 7.5 or 15mm
- Short circuit protection
- Overload protection
- High efficiency
- LED indicator for DC power ON
- LED indication for DC low
- Internal input filter
- CE, TUV approved and cULus Listed

Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the installation is on a DIN rail and compact dimensions and performance are a must.

Ordering Key

SP D 24 18 1 B

Model _____
Mounting (D = Din rail) _____
Output voltage _____
Output power _____
Input Type _____
Optional features _____

Input type: 1= single phase

Approvals



UL US C **UL** US C **UL** US
Class I, Div 2 UL 1310 UL 60950-1

Optional Features

Description	Code
Spring connectors	B

Output performances

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)
Single Output Models						
SPD05	90~264 VAC	15 WATTS	+ 5 VDC	3000 mA	73%	75%
SPD12	90~264 VAC	18 WATTS	+12 VDC	1500 mA	75%	77%
SPD15	90~264 VAC	18 WATTS	+15 VDC	1200 mA	75%	77%
SPD24	90~264 VAC	18 WATTS	+24 VDC	750 mA	75%	77%

Output data

Line regulation	± 1%
Load regulation	± 2%
Minimum load	0
Turn on time (full resistive load)	1000ms
Vi nom, Io nom with 7000µF CAP	1500ms
Transient recovery time	2ms
Ripple and noise	50mVpp
Output voltage accuracy	± 1%
Temperature coefficient	± 0.03%/°C
Hold up time Vi= 115VAC	20ms
Vi= 230VAC	75ms
Voltage fall time (I _o nom)	150ms max

Rated continuous loading	
5V Model	3A @ 5VDC/2.6A @ 5.75VDC
12V Model	1.5A @ 12VDC/1.3A @ 13.8VDC
15V Model	1.2A @ 15VDC/1.0A @ 17.25VDC
24V Model	0.75A @ 24VDC/0.6A @ 28.8VDC
Reverse voltage	
5V Model	VDC 7.5
12V Model	VDC 18
15V Model	VDC 22
24V Model	VDC 35
Capacitor load	7000µF
Voltage rise time	
Vi nom Io nom	150ms
Vi nom, Io nom with 7000µF CAP	500ms

Input data

Rated input voltage	100 - 240VAC	Power dissipation (Vi : 230VAC, Io nom)	5V Model 5.0W 12V Model 4.65W 15V Model 4.25W 24V Model 4.45W
Voltage range		Frequency range	47 - 63Hz
AC	90 - 264VAC	Leakage current	
DC	120 - 375VDC	Input-Output	0.25mA
Rated input current		Input-FG	3.5mA
Vi: 115VAC, Io nom	335-500mA		
Inrush current			
Vi= 115VAC	10A		
Vi= 230VAC	18A		

Controls and Protections

Overload	110 – 140%	Output Short Circuit	Hiccup mode
Input Fuse	T2A/250VAC internal ¹⁾	Internal surge voltage protection (IEC 61000-4-5)	Varistor
Overvoltage Protection	125 – 145%		

¹⁾ Fuse not replaceable by user


General data (@ nominal line, full load, 25°C)

Ambient temperature	-20°C to 71°C	MTBF (Bellcore issue 6 @ 40°C, GB)	
Derating (>61°C to +71°C)	2.5%/°C	5V Model	795000 Hours
Ambient humidity	20 ~ 95%RH	12V Model	797000 Hours
Storage	-25°C to +85°C	15V Model	796000 Hours
Protection degree	IP20	24V Model	800000 Hours
Cooling	Free air convection	Case material	Plastic: PC, UL94-V0
Insulation voltage		Pollution degree	2
Input-Output	3.000VAC/4242VDC min	Altitude	2000m
Input-FG	1.500VAC/2121VDC min	Dimensions LxWxD mm(inch)	90(3.60)x22.5(0.89)x114(4.49)
Insulation resistance I/O	100MΩ min (@ 500VDC)	Weight	150g

Norms and Standards

Vibration resistance	meet IEC 60068-2-6 (Mounting by rail: 10-500Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)	CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3, EN 61000-4-4 Level 4, EN 61000-4-5 L-N Level 3, L/N-FG Level 4, EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11, ENV 50204 Level 2, EN 61204-3
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 faces, 3 times for each face)		
UL / cUL	UL508 listed, UL60950-1, UL1310 Class 2 Power (only 5V, 12V w/o Class 2) Recognized, ISA 12.12.01 (Class 1, Division 2, Groups A, B, C and D)		
TUV	EN 60950-1, CB scheme		
CCC	GB4943, GB9254, GB17625.1		


Block diagrams

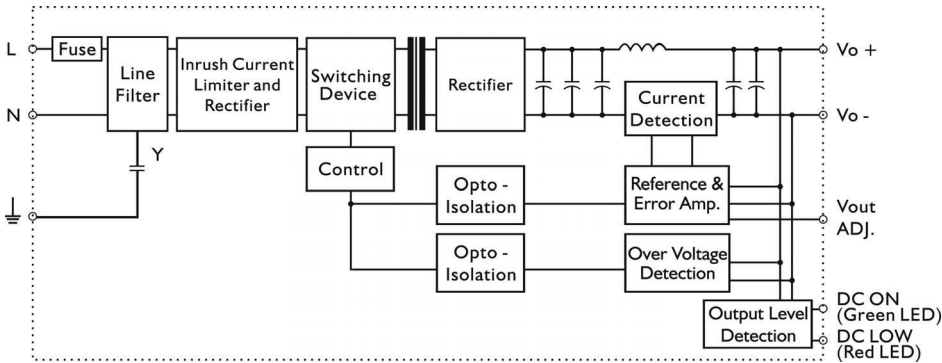


Pin Assignment and Front Controls

Pin No.	Designation	Description
1	V+	Positive output terminal
2	V-	Negative output terminal
3		Ground this terminal to minimize high-frequency emission
4	N	Input terminals (neutral conductor, no polarity at DC input)
5	L	Input terminals (phase conductor, no polarity at DC input)
	ON	Operation indicator LED
	LO	DC LOW indicator LED
	Vout ADJ.	Trimmer-potentiometer for Vout adjustment


Derating Diagram

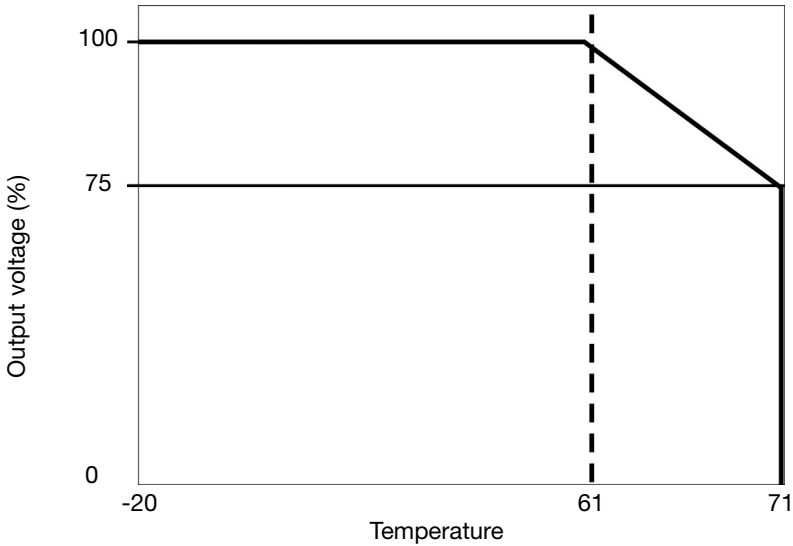


Typ. Current Limited Curve

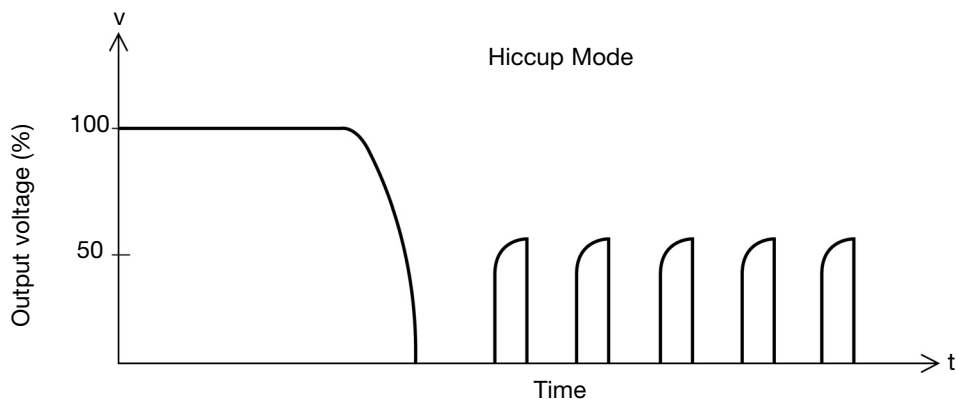

Mechanical Drawings mm (inches)

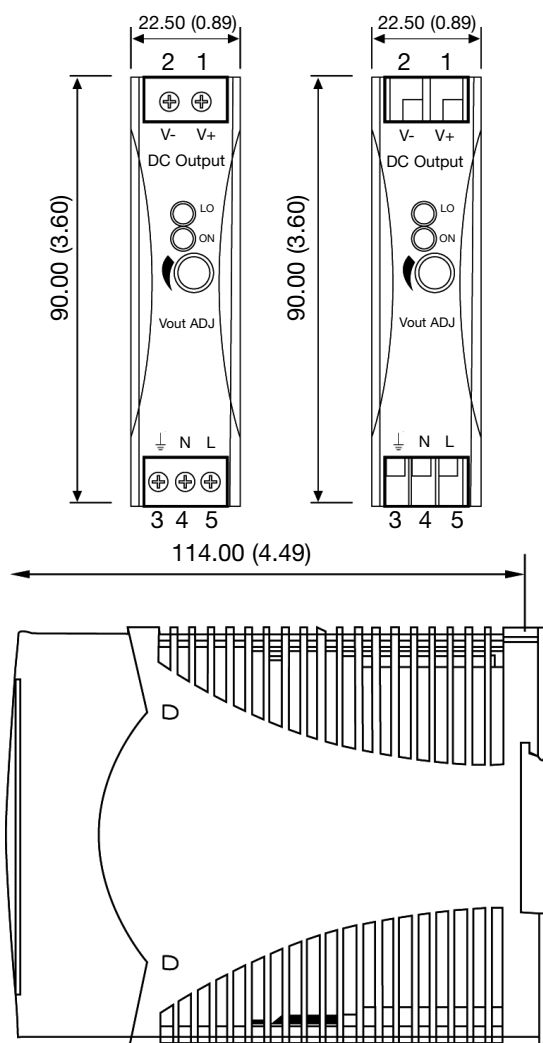

Typ. Efficiency Curve

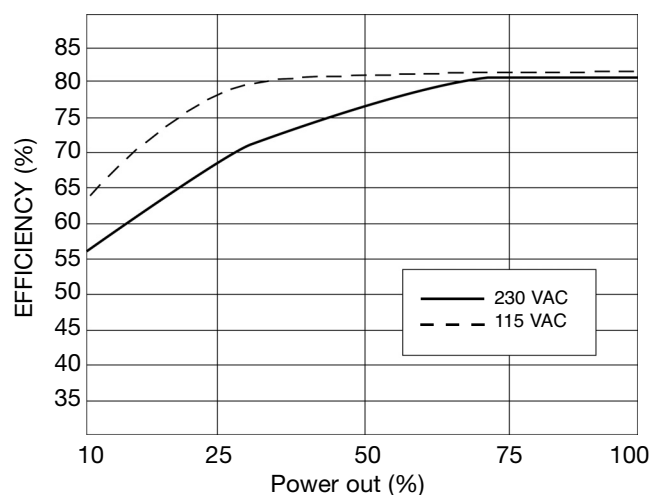

Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended
Connector size range	AWG24-14 (0.2~2mm ²) flexible/solid cable, 10mm stripping at cable and recommends use copper conductors only, 60/75°C
Spring terminal	
Screw terminal	AWG26-12 (0.2~2.5mm ²) flexible/solid cable, connector can withstand torque at max 0,56Nm (5 lbs-in). 4~5 mm stripping at cable and recommends use copper conductors only, 60/75°C
Max. torque for terminal	
Input terminals	0.56Nm (5.0lb-in)
Output terminals	0.56Nm (5.0lb-in)
General tolerances mm(in.)	
0.00 (0.00) ÷ 30.00 (1.18)	±0.30 (0.01)
30.00 (1.18) ÷ 120.00 (4.72)	±0.50 (0.02)