




CODEC Features

- ◆ 4-wire and 5-wire digital audio I/O (I²S/PCM/SPDIF), supporting full duplex independent sampling rates, master clock for optional PCM/I²S slave codec (SPDIF-in available in CX20709-21Z)
- ◆ One 2-wire I²C and one 4-wire SPI slave interface for external MCU
- ◆ USB 2.0 Compliant full speed UAC Interface
- ◆ Supporting dual USB playback end points (available in CX20709-21Z)
- ◆ Stereo Digital Microphone, up to 12 MHz clock rate (available in CX20709-21Z)
- ◆ Eight GPIO pins
- ◆ 2.8 W x 2 BTL filter-less stereo Class-D Speaker Amplifier
 - Low EMI Class-D amplifier output with Spread Spectrum and common mode scrambler
- ◆ Integrated 50 mW headphone driver with jack sense
- ◆ Single-ended or differential line output

- ◆ Separate mixed mono line-output for sub-woofer or intercom usage
- ◆ Three single-ended stereo or one differential stereo analog audio input
- ◆ Up to 4 microphone interfaces with on-chip bias supply (available in CX20709-21Z)
- ◆ 24-bit DAC/ADC, SNR 102 dB, THD -92 dB at 48 kHz 3.3 V
 - In DSP mode, the processing will be limited the input and output to 16-bit effective resolution
- ◆ Audio sample rate: 8, 16, 22.05, 24, 32, 44.1, 48, 88.2, 96 kHz
- ◆ 90 dB Dynamic Range with 0.1% THD+N at 4 Ω load
- ◆ 12-bit ADC multiplexed to support analog volume potentiometer and DC level detection
- ◆ Flexible Power Management
- ◆ Variable master clock rates
- ◆ Configurable On-Chip proprietary Voice/Audio Processing
 - Subband Acoustic Echo Cancellation

- Dual Microphone Beam Forming
- Noise Reduction
- Dynamic Loudness Adaptor
- Microphone Automatic Gain Control
- Subband Line Echo Cancellation (2-way intercom applications)
- Digital Equalizer (10 bands/channel)
- Dynamic Range Compression
- 4th Order Digital Crossover for Subwoofer Line-out
- Conexant sound-bar algorithm for USB 5.1 channel sound-bar enhancement (available in CX20709-21Z)
- ◆ SPoC Configuration Toolbox
 - Fast configuration via USB-to-I²C from PC
 - Data path, I/O setup, and DSP parameter adjustment
 - Output log for convenient MCU programming

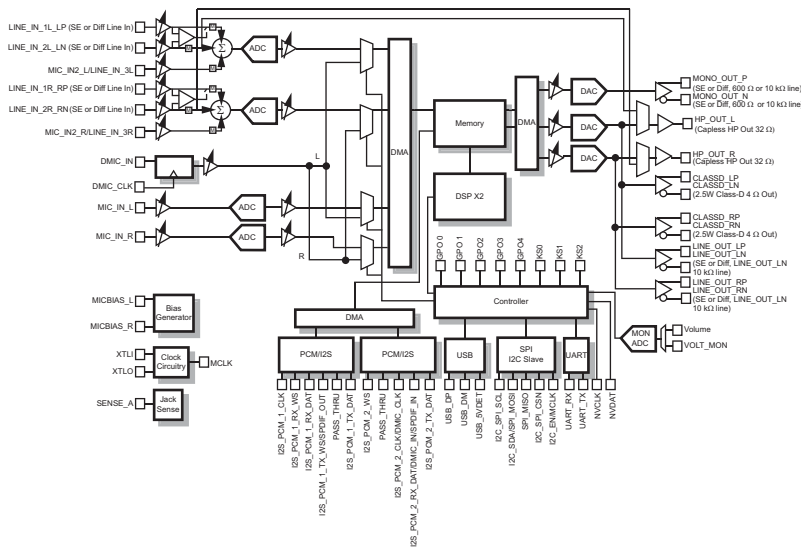

Functional Block Diagram

Conexant Product Portfolio

Conexant's comprehensive product portfolio includes solutions for imaging, audio, video surveillance, and embedded modem applications.

© 2012 Conexant Systems, Inc. All Rights Reserved. Conexant and the Conexant logo are registered trademarks of Conexant Systems, Inc. All other trademarks are owned by their respective owners. Although Conexant strives for accuracy in all its publications, this material may contain errors or omissions and is subject to change without notice. **THIS MATERIAL IS PROVIDED AS IS AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.** Conexant shall not be liable for any special, indirect, incidental or consequential damages as a result of its use.

www.conexant.com
 General Information:
 U.S. and Canada:
 (888) 855-4562
 International:
 1+ (949) 483-3000
 Headquarters
 4000 MacArthur Blvd.
 Newport Beach, CA 92660
 Doc# PBR-202964

Conexant products are not intended for use in medical, lifesaving or life sustaining applications. Conexant customers using or selling Conexant products for use in such applications do so at their own risk and agree to fully indemnify Conexant for any damages resulting from such improper use or sale. The following are trademarks of Conexant Systems, Inc.: Conexant® and the Conexant C symbol, SmartAudio, SmartJack, SmartCD, and SmartDAA®. Product names or services listed in this publication are for identification purposes only, and may be trademarks of third parties. Third-party brands and names are the property of their respective owners. For additional disclaimer information, please consult Conexant's Legal Information posted at www.conexant.com, which is incorporated by reference. Reader Response: Conexant strives to produce quality documentation and welcomes your feedback. Please send comments and suggestions to tech.pubs@conexant.com. For technical questions, contact your local Conexant sales office or field applications engineer.