




DomiLED InGaN BL-PDx-DJx



- High brightness surface mount LED.
- Based on InGaN / Sapphire technology.
- 120° viewing angle.
- Small package outline (LxWxH) of 2.8 x 3.2 x 1.8 mm.
- Qualified according to JEDEC moisture sensitivity Level 2.
- Compatible to both IR reflow soldering and TTW soldering.

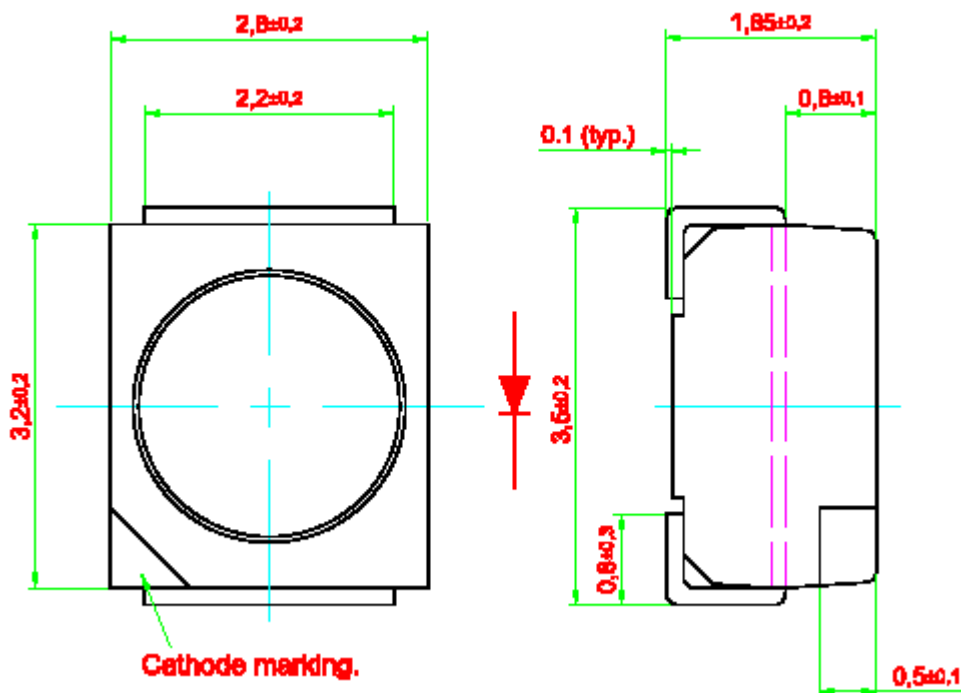

Part Ordering Number	Chip Technology / Color	Viewing angle	Luminous Intensity @ If = 20mA Iv (mcd)
BL-PDB-DJS-C10 - Bin P1 - Bin P2 - Bin Q1 - Bin Q2	InGaN / Blue, 470 nm	120	45.0 ... 112.5 45.0 ... 56.0 56.0 ... 71.5 71.5 ... 90.0 90.0 ... 112.5
BL-PDB-DJS-C20 - Bin Q1 - Bin Q2 - Bin R1 - Bin R2	InGaN / Blue, 470 nm	120	71.5 ... 180.0 71.5 ... 90.0 90.0 ... 112.5 112.5 ... 140.0 140.0 ... 180.0
BL-PDT-DJS-C10 - Bin S1 - Bin S2 - Bin T1 - Bin T2	InGaN / True Green	120	180.0 ... 450.0 180.0 ... 224.0 224.0 ... 285.0 285.0 ... 355.0 355.0 ... 450.0
BL-PDT-DJS-C20 - Bin S2 - Bin T1 - Bin T2 - Bin U1	InGaN / True Green	120	224.0 ... 560.0 224.0 ... 285.0 285.0 ... 355.0 355.0 ... 450.0 450.0 ... 560.0
BL-PDW-DJD-C10 - Bin S1 - Bin S2 - Bin T1 - Bin T2	InGaN / White	120	180.0 ... 450.0 180.0 ... 224.0 224.0 ... 285.0 285.0 ... 355.0 355.0 ... 450.0
BL-PDW-DJD-C20 - Bin U1 - Bin U2 - Bin V1 - Bin V2	InGaN / White	120	450.0 ... 1125.0 450.0 ... 560.0 560.0 ... 715.0 715.0 ... 900.0 900.0 ... 1125.0

*Not for new design

NOTE:

1. All part number above comes in a quantity of 2000 units per reel.
2. Other luminous intensity groups are also available upon request.
3. Luminous intensity is measured with an accuracy of $\pm 11\%$.
4. Wavelength binning is carried for all units as per the wavelength-binning table. Only one wavelength group is allowed for each reel.
5. An optional Vf binning is also available upon request. Binning scheme is as per following table.

**Electrical Characteristics at Ta=25°C.**

	Vf @ If = 20mA			Vr @ Ir = 10uA
Part Number	Min. (V)	Typ. (V)	Max. (V)	Min.(V)
BL-PDB, BL-PDW	3.0	3.2	3.8	5
BL-PDT	3.0	3.4	4.0	5

Forward voltage, Vf is measured with an accuracy of ± 0.1 V.


Wavelength Grouping.

Color	Group	Wavelength distribution (nm)
BL-PDB; Blue	Full	464 - 476
	W	464 - 468
	X	468 - 472
	Y	472 - 476
BL-PDT; True Green	Full	520- 536
	W	520 - 524
	X	524 - 528
	Y	528 – 532
	Z	532 – 536

Dominant wavelength is measured with an accuracy of ± 1 nm.



BL-PDW, Whiteled color Grouping

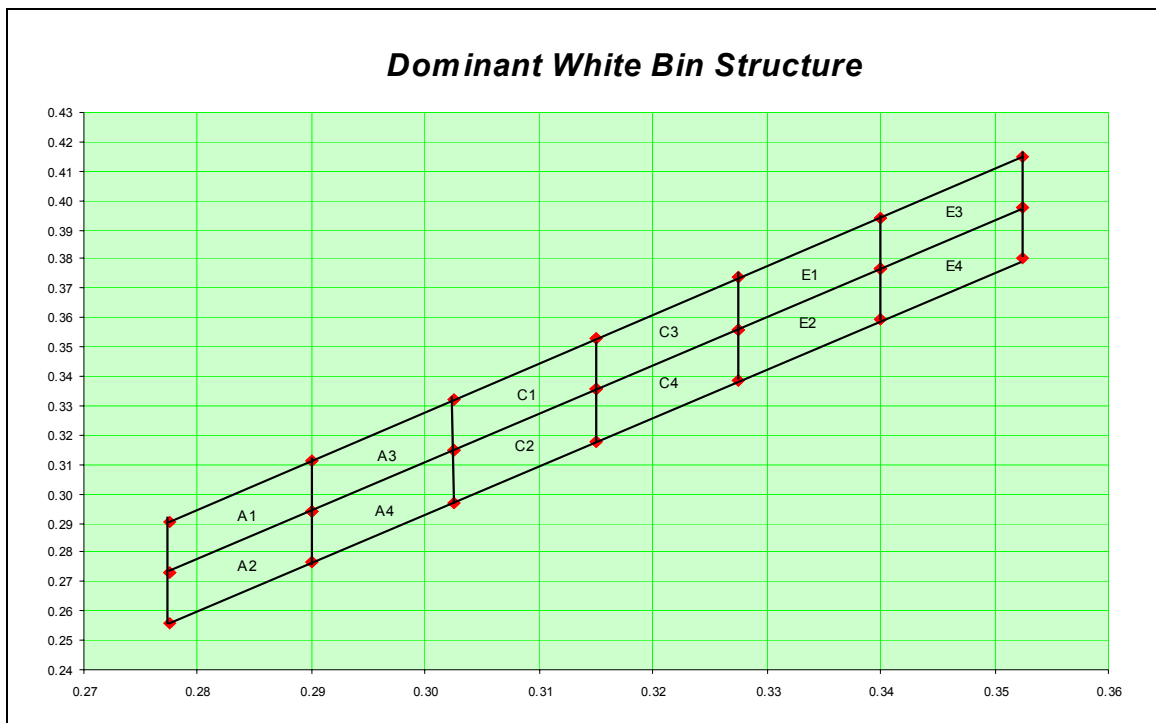

Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .


W						X					
Bin						Bin					
A1	Cx	0.2775	0.2900	0.2900	0.2775	E1	Cx	0.3275	0.3400	0.3400	0.3275
	Cy	0.2732	0.2939	0.3114	0.2907		Cy	0.3561	0.3768	0.3943	0.3736
A2	Cx	0.2775	0.2900	0.2900	0.2775	E2	Cx	0.3275	0.3400	0.3400	0.3275
	Cy	0.2557	0.2764	0.2939	0.2732		Cy	0.3386	0.3593	0.3768	0.3561
A3	Cx	0.2900	0.3025	0.3025	0.2900	E3	Cx	0.3400	0.3525	0.3525	0.3400
	Cy	0.2939	0.3146	0.3321	0.3114		Cy	0.3768	0.3975	0.4150	0.3943
A4	Cx	0.2900	0.3025	0.3025	0.2900	E4	Cx	0.3400	0.3525	0.3525	0.3400
	Cy	0.2764	0.2971	0.3146	0.2939		Cy	0.3593	0.3800	0.3975	0.3768
C1	Cx	0.3025	0.3150	0.3150	0.3025						
	Cy	0.3146	0.3354	0.3529	0.3321						
C2	Cx	0.3025	0.3150	0.3150	0.3025						
	Cy	0.2971	0.3179	0.3354	0.3146						
C3	Cx	0.3150	0.3275	0.3275	0.3150						
	Cy	0.3354	0.3561	0.3736	0.3529						
C4	Cx	0.3150	0.3275	0.3275	0.3150						
	Cy	0.3179	0.3386	0.3561	0.3354						

**Absolute Maximum Ratings.**

	Maximum Value	Unit
DC forward current.	20	mA
Peak pulse current; ($t_p \leq 10 \mu s$, Duty cycle = 0.005)	200	mA
Reverse voltage.	5	V
LED junction temperature.	100	°C
Operating temperature.	-40 ... +85	°C
Storage temperature.	-40 ... +100	°C
Power dissipation (at room temperature)	73	mW


Recommended Solder Pad

Additional Cu area for improved heat dissipation.

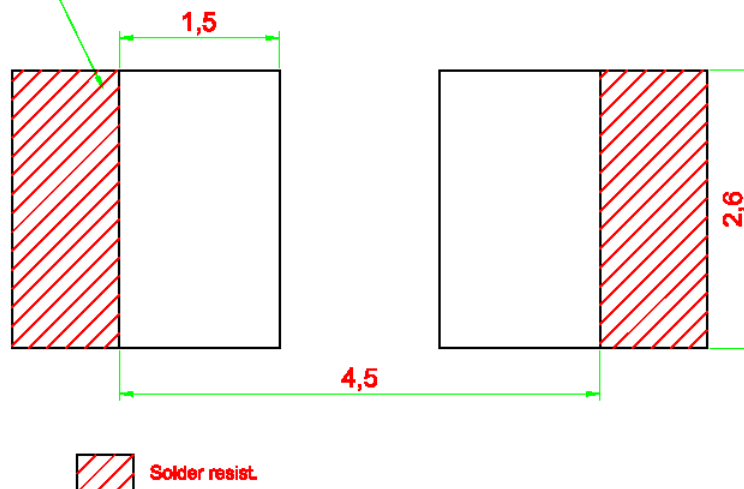





Relative luminous intensity vs. forward current.

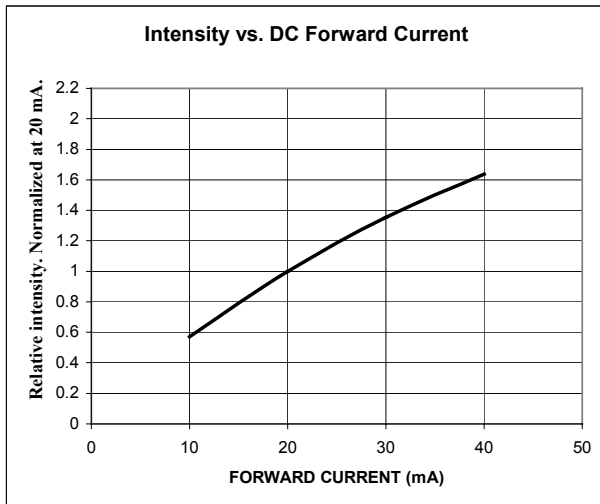


Forward current vs. forward voltage.

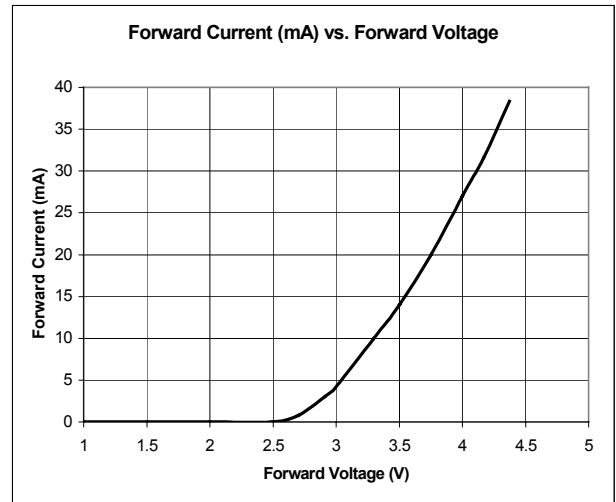


Radiation pattern.

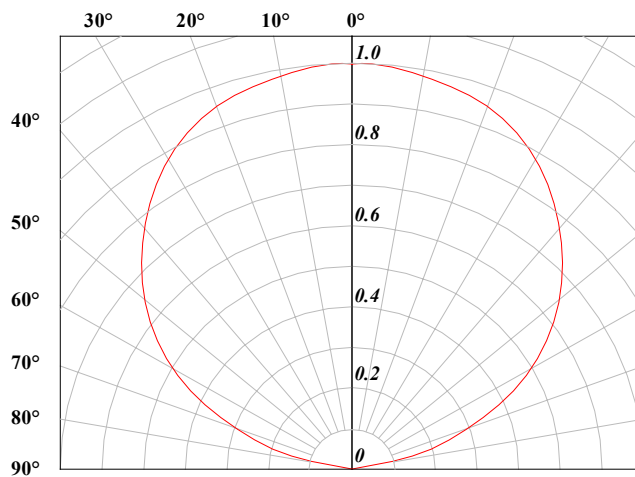


Maximum forward current vs. temperature.

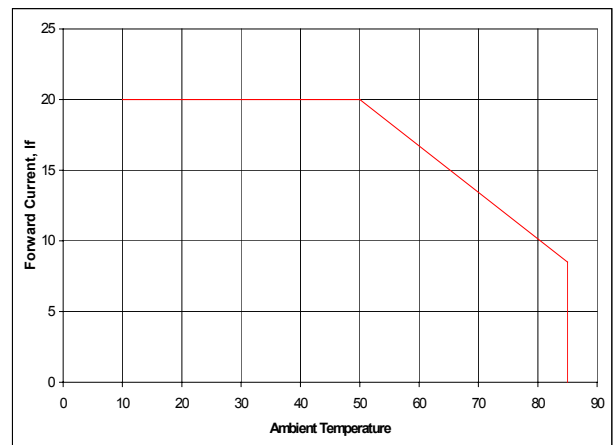

Relative Intensity vs. Wavelength

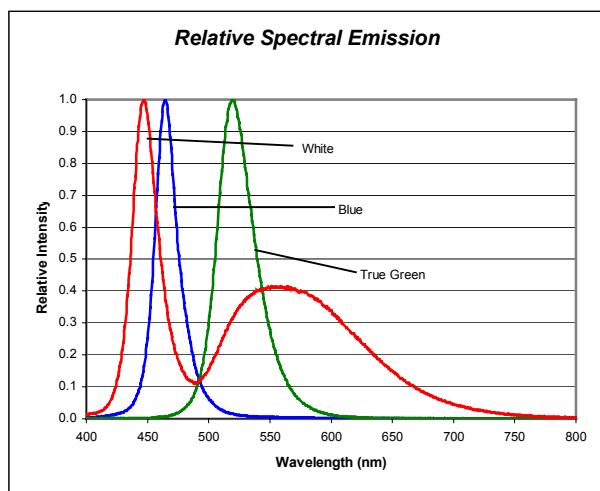

Dominant Wavelength vs. Forward Current

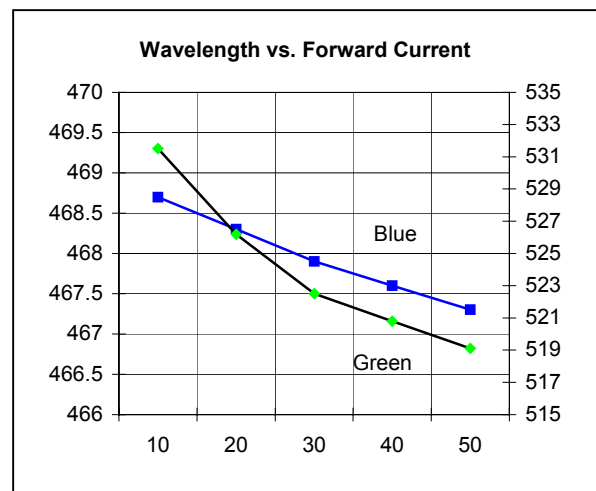




Taping And Orientation.

Reels come in quantity of 8000 units or 2000 units.

Reel diameters are 330 mm and 180 mm respectively.

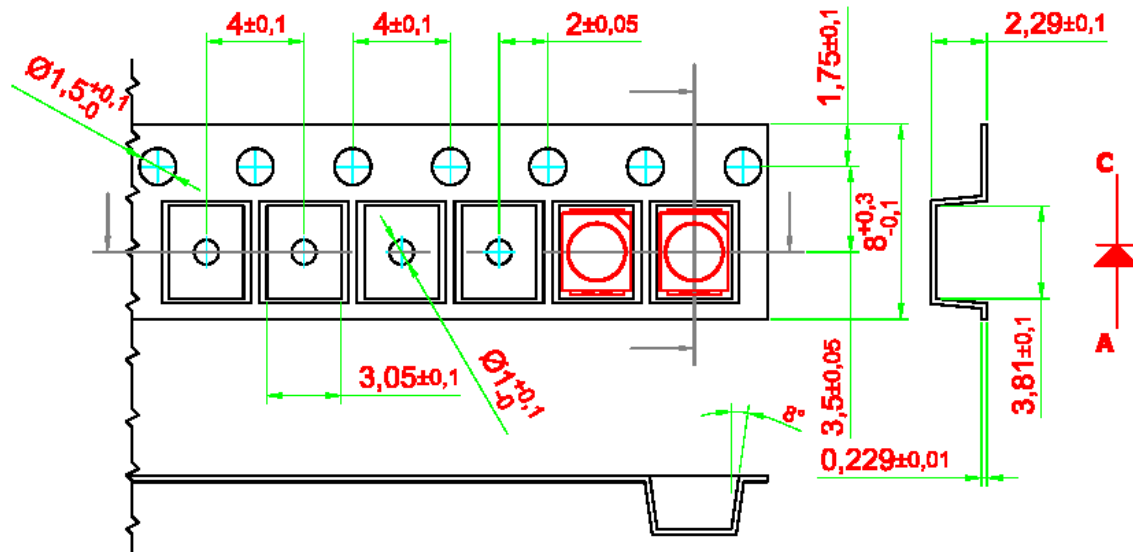


200 mm min. for Ø180 reel.

480 mm min. for Ø180 reel.


200 mm min. for Ø330 reel.

960 mm min. for Ø330 reel.

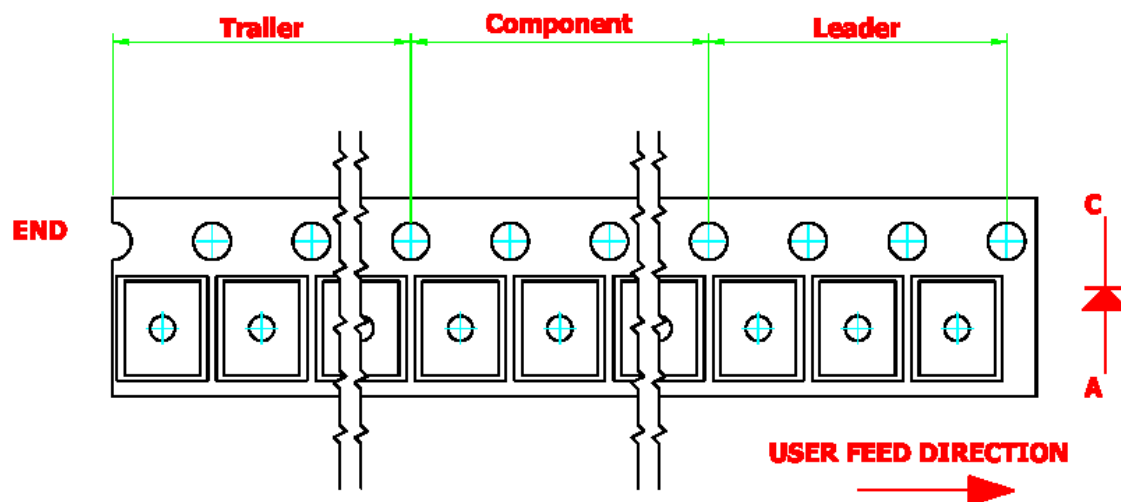



Recommended Sn-Pb IR-Reflow Soldering Profile.

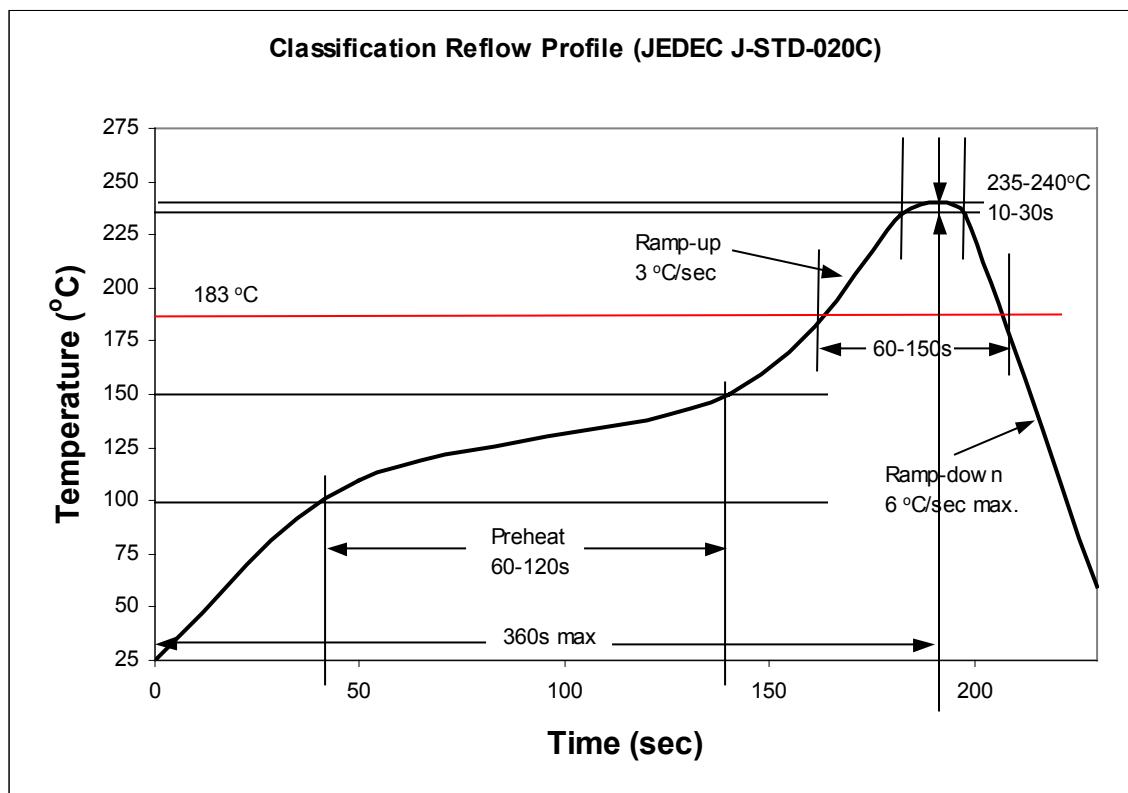

Recommended Pb Free IR-Reflow Soldering Profile.

