


● Features:

1. Lens Appearance : red diffused
2. Low power requirement.
3. Excellent characters appearance.
4. Solid state reliability.
5. single color
6. Versatile mounting on P.C. Board or panel.

● Description:

1. The BL-B6Y120-3P series consists of 20.0mm diameter big lamps.
2. This product use yellow chips, which are made from GaAsP on GaP substrate.
3. This product doesn't contain restriction substance, comply ROHS standard.

● Package dimensions:

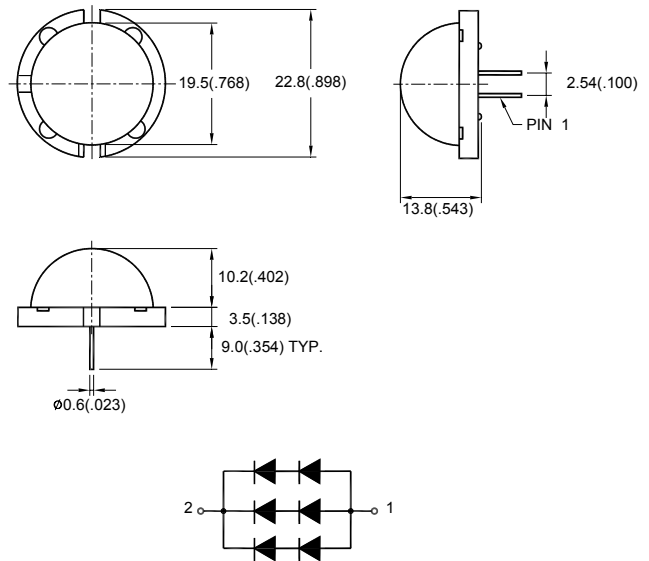

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (0.01") unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

● Absolute Maximum Ratings(Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|------------------------------------|-----------------|-----------------------|------|
| Power Dissipation | Pd | 480 | mW |
| Forward Current | I _F | 30 | mA |
| Peak Forward Current* ¹ | I _{FP} | 150 | mA |
| Reverse Voltage | V _R | 5 | V |
| Operating Temperature | Topr | -40°C~80°C | |
| Storage Temperature | Tstg | -40°C~85°C | |
| Soldering Temperature | Tsol | 260°C (for 5 seconds) | |

*¹Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width.

● Electrical and optical characteristics(Ta=25°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--------------------------|------------------|------------|------|------|------|---------|
| Forward Voltage | V_F | $I_F=20mA$ | - | 4.2 | 5.2 | V |
| Luminous Intensity | I_v | $I_F=20mA$ | - | 170 | - | mcd |
| Reverse Current | I_R | $V_R=5V$ | - | - | 100 | μA |
| Peak Wave Length | λ_p | $I_F=20mA$ | - | 589 | - | nm |
| Dominant Wave Length | λ_d | $I_F=20mA$ | 586 | - | 594 | nm |
| Spectral Line Half-width | $\Delta \lambda$ | $I_F=20mA$ | - | 35 | - | nm |
| Viewing Angle | $2\theta_{1/2}$ | $I_F=20mA$ | - | 180 | - | deg |

● Typical Electro-Optical Characteristics Curves

Fig.1 Relative intensity vs. Wavelength




Fig.2 Forward current derating curve vs. Ambient temperature

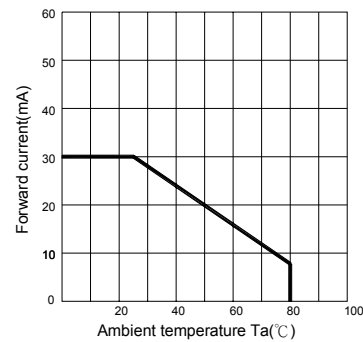


Fig.3 Forward current vs. Forward voltage




Fig.4 Relative luminous intensity vs. Ambient temperature




Fig.5 Relative luminous intensity vs. Forward current




Fig.6 Radiation diagram

