

BRIGHT LED ELECTRONICS CORP.

●Device Number : BIR-BM17J4G

Page: 2

●Absolute Maximum Rating($T_a=25^{\circ}\text{C}$)

Version:1.1

Item	Symbol	Rating	Unit
Reverse Voltage	V_r	5	V
Reverse Current	I_r	100	μA
Power Dissipation	P_d	100	mW
Forward Current	I_f	100	mA
Peak Forward Current(*1)	I_{fp}	1.0	A
Operating Temperature	T_{opr}	-45 ~ +85	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-45 ~ +100	$^{\circ}\text{C}$
Soldering Temperature(*2)	T_{sol}	260	$^{\circ}\text{C}$

(*1)、Pulse Width=10 μs ,10%Duty Cycle

(*2)、For 5 Sec

●Electrical And Optical Characteristics($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_f	$I_f=50\text{mA}$	—	1.2	1.5	V
Spectral Line Half-Width	$\Delta\lambda$	$I_f=20\text{mA}$	—	50	—	nm
Radiant Power	E_e	$I_f=50\text{mA}$	1.8	7.1	—	mW/cm^2
	I_e	$I_f=50\text{mA}$	11.7	46.8	—	mW/sr
Viewing Angle	2θ	$I_f=20\text{mA}$	—	20	—	deg
Peak Wavelength	λ_p	$I_f=20\text{mA}$	—	940	—	nm
Rise Time	T_r	$I_{fp}=20\text{mA}, R_L=1\text{k}\Omega$	—	500	—	ns
Fall Time	T_f		—	500	—	ns



BRIGHT LED ELECTRONICS CORP.

●Device Number: BIR-BM17J4G

Page: 3

●Dimensions

Version: 1.0

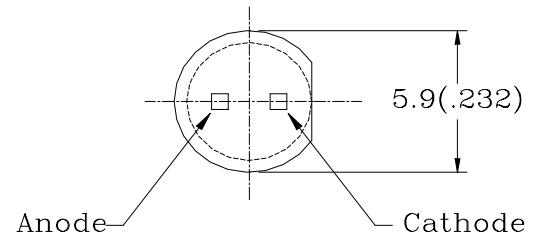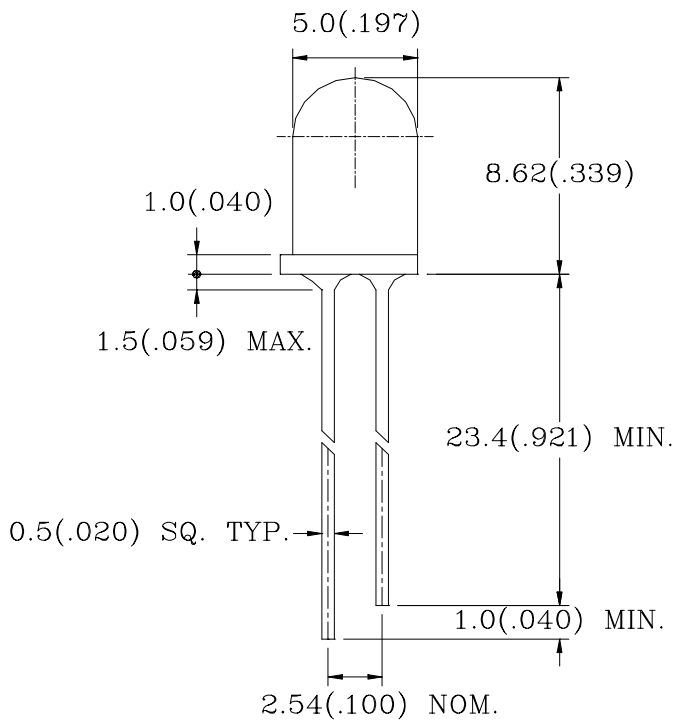

Notes:

- 1、All dimensions are in millimeters(inches).
- 2、Tolerance is $\pm 0.25\text{mm}(0.01'')$ unless otherwise specified.
- 3、Lead spacing is measured where the leads emerge from the package.
- 4、Specifications are subject to change without notice.

BRIGHT LED ELECTRONICS CORP.

● Device Number: BIR-BM17J4G

Page: 4

● Electrical And Optical Curves (Ta=25°C)

Version: 1.1

FIG.1 Spectral Disribution

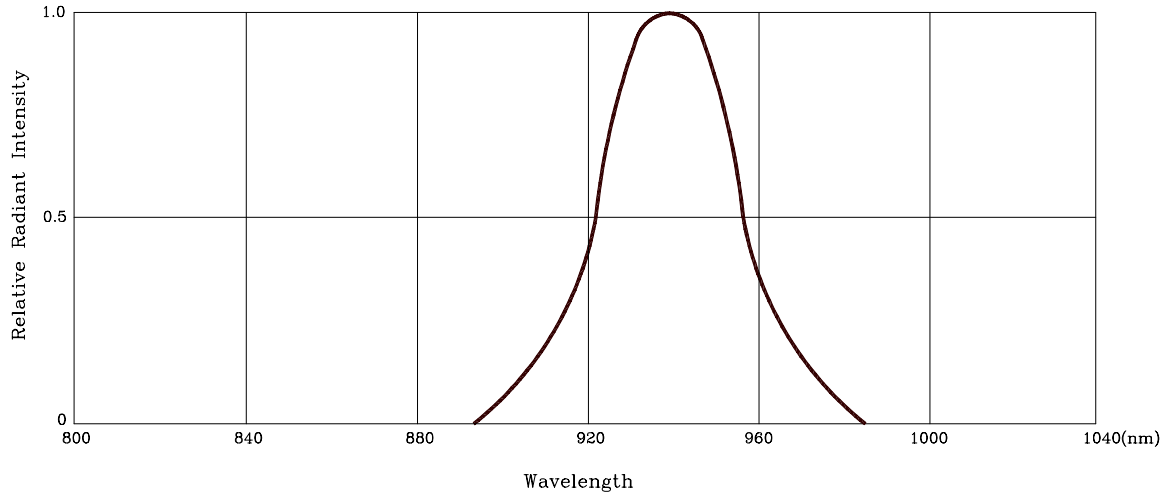


FIG.2 Forward Current Vs. Forward Voltage

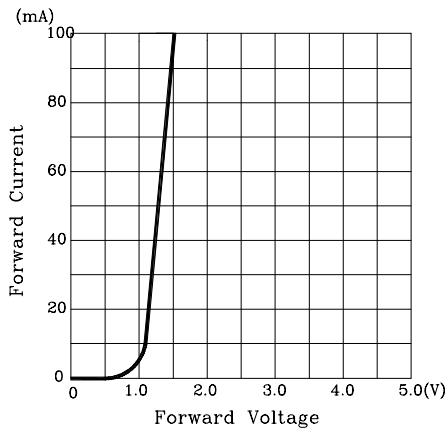


FIG.2 Relative Radiant Intensity Vs. Ambient Temperature

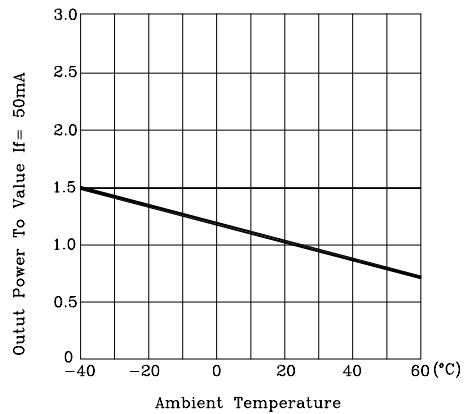


FIG.4 Relative Radiant Vs. Forward Current

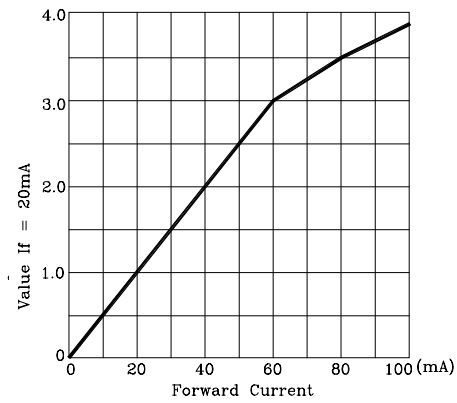


FIG.5 Radiant Diagram

