




ELECTRICAL CHARACTERISTICS @ 25°C

1.0 TURNS RATIO:(P6-P5-P4) : (J6-J3)	: 1CT : 1CT ± 3%
(P3-P2-P1) : (J2-J1)	: 1CT : 1CT ± 3%
2.0 INDUCTANCE: (P6-P4)	: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias
(P3-P1)	: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias
3.0 LEAKAGE INDUCTANCE:P6-P4 (WITH J6 AND J3 SHORT)	: 0.3 MAX. @ 1MHz
P3-P1 (WITH J2 AND J1 SHORT)	: 0.3 MAX. @ 1MHz
4.0 INTERWINDING CAPACITANCE:(P6,P5,P4) TO (J6,J3)	: 30pF MAX @ 1MHz
(P3,P2,P1) TO (J2,J1)	: 30pF MAX. @ 1MHz
5.0 DC RESISTANCE: (J6-J3)=(J2-J1)	: 1.2 ohms Max.
RECEIVE	
6.0 RETURN LOSS:1MHz TO 30MHz	: 18dB MIN.
60MHz TO 80MHz	: 12dB MIN.
NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3).	
7.0 DIELECTRIC WITHSTAND: (J1, J2) TO (P1, P3)	: 1500 Vrms
(J3, J6) TO (P4,P6)	: 1500 Vrms
8.0 INSERTION LOSSRS=RL=100 ohms	
100KHz TO 100MHz	: 1.1 dB TYP
9.0 RISE TIMERS=100 OHMS AND RL = 100 OHMS	
OUTPUT VOLTAGE = 1 V peak	: 3.0 nS MAX
PULSE WIDTH= 112nS	: 3.0 nS MAX
10.0CROSS TALK:1MHz TO 100MHz	: 40 dB TYP
11.0COMMON TO COMMON MODE ATTENUATION:	
30MHz TO 100MHz: 35dB TYP	

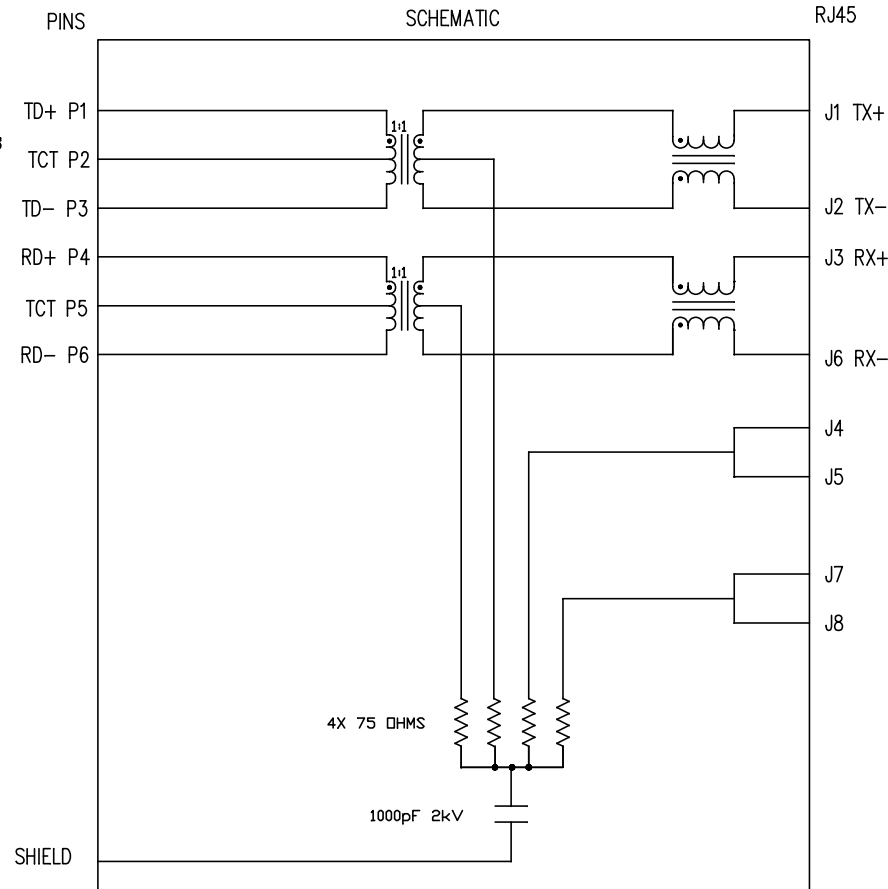


NOTES

1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM.	[] METRIC DIM. AS REFERENCE		 COMPONENTS FOR A CONNECTED PLANET
Bain Liu	08-31-09	MagJack® 10/100BT TAB DOWN, SHIELDED PATENTED	SI-60126-F	TOL. IN INCH	UNIT : INCH [mm]	REV. : A0	
DRAWN BY	DATE		FILE NAME	.X	SCALE : N/A	SIZE : A4	
Bain Liu	08-31-09		SI-60126-F.DWG	.XX		PAGE : 2	
				.XXX			


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

RoHS
2002/95/EC

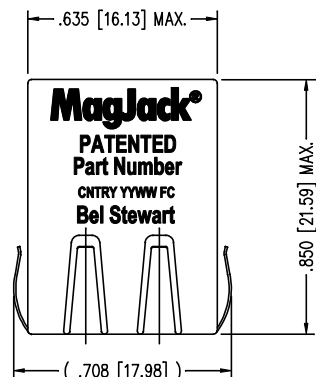

LED SPECIFICATION			
STANDARD LED	WAVELENGTH	Forward V (MAX)	* (TYP)
GREEN	565 nm	2.5 V	2.2 V

*WITH A FORWARD CURRENT OF 20 mA (TYP)


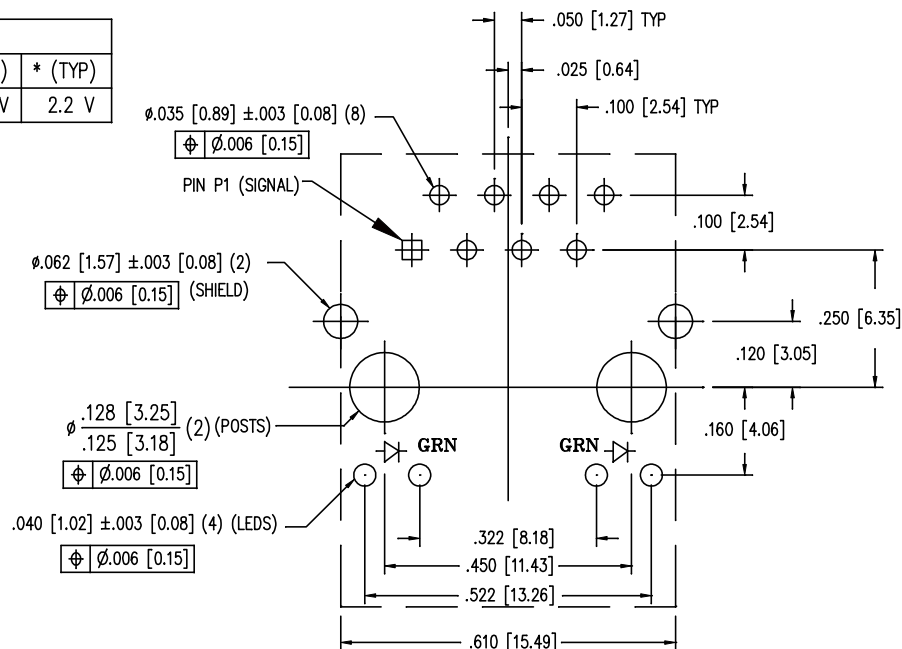


P.C.B. RECOMMENDED HOLE LAYOUT
SEEN FROM COMPONENT SIDE


ALL CENTERLINE DIMENSIONS ARE BASIC.

NOTES:

- CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACT/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL OR TIN
CONTACT PLATING: SELECTIVE GOLD,
50 MICRO-INCHES MIN. IN CONTACT AREA.
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED.
SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE $\pm .005 [0.13]$
- WAVE SOLDER COMPATIBLE - PREHEAT 125°C/90SECS.

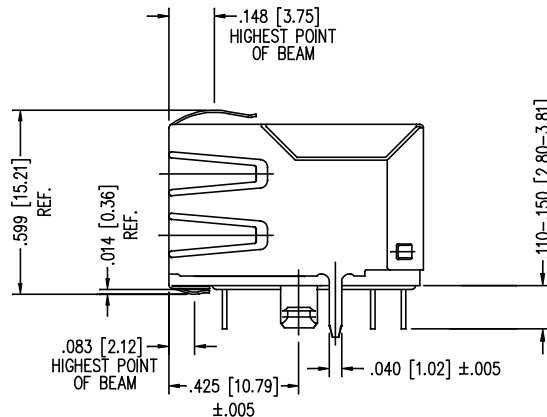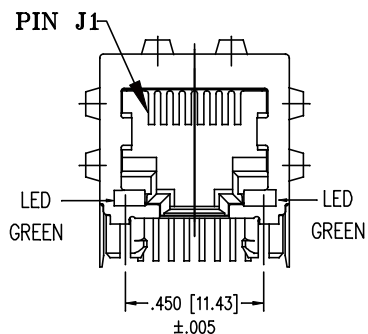


ORIGINATED BY Bain Liu	DATE 08-31-09	TITLE MagJack® 10/100BT TAB DOWN, SHIELDED PATENTED	PART NO. / DRAWING NO. SI-60126-F	STANDARD DIM. TOL. IN INCH .X .XX .XXX ± 0.005	[] METRIC DIM. AS REFERENCE		bel COMPONENTS FOR A CONNECTED PLANET
					UNIT : INCH [mm]	REV. : A0	
DRAWN BY Bain Liu	DATE 08-31-09		FILE NAME SI-60126-F.DWG		SCALE : N/A	SIZE : A4	
						PAGE : 3	

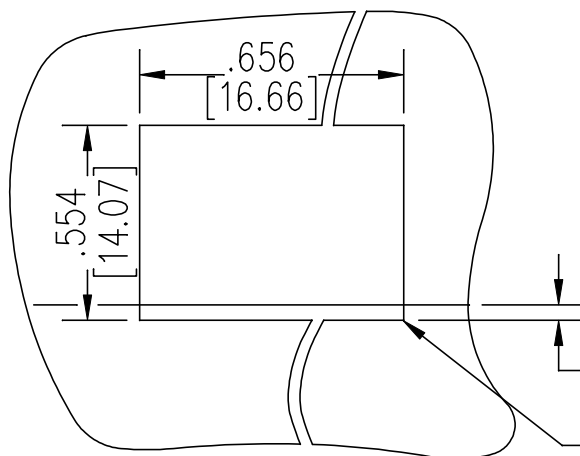

SUGGESTED PANEL OPENING

.000 (TOP OF PCB TO BOTTOM OF OPENING)

.010 [0.25] MAX. RADIUS(4)

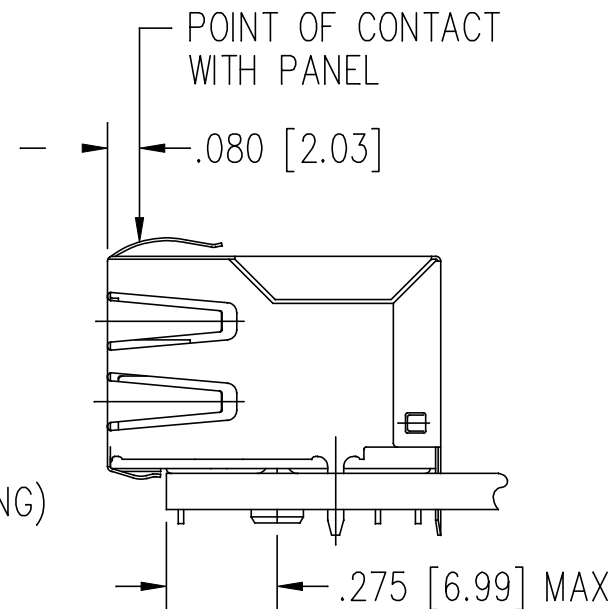

1. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.
2. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ± 0.005 [0.13]

ORIGINATED BY	DATE	TITLE MagJack® 10/100BT TAB DOWN, SHIELDED PATENTED	PART NO. / DRAWING NO.	STANDARD DIM.		[] METRIC DIM. AS REFERENCE		bel COMPONENTS FOR A CONNECTED PLANET	
Bain Liu	08-31-09		SI-60126-F	TOL. IN INCH		UNIT : INCH [mm]			REV. : A0
DRAWN BY	DATE		FILE NAME	.X		SCALE : N/A			SIZE : A4
Bain Liu	08-31-09		SI-60126-F.DWG	.XX		PAGE : 4			
				.XXX	±0.005				