

SPDT RF SWITCH

MODEL TWD5001

Package: DP3 - 14 lead DIP Package
Also Available In: Connectorized Housings

Features

- 10 - 1000 MHz
- RF1, RF2 Terminated in "OFF" State
- Integral TTL Driver
- OperatingTemp. -55 °C to + 85 °C
- Environmental Screening Available

Absolute Maximum (No Damage) Ratings


Ambient Operating Temperature -55°C to +100 °C
Storage Temperature -65°C to +125 °C
Case Temperature +125 °C
DC Voltage +17 Volts
Continuous RF Input Power +30 dBm

Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 1000 MHz	10 - 1000 MHz
Insertion Loss (dB)	1.0	2.0 Max.
Isolation (dB)	45	25 Min.
VSWR	1.2:1	1.5:1 Max.
DC Bias	Vdc mA	+15V 23 Max.
Switching Speed (µsec)	3	4 Max.
Transients	750	—
1dB Compression (dBm)	+23	—
Intercept Points (dBm)	IP2 IP3 +65 +40	—

Note: Care should always be taken to effectively ground the case of each unit.


Pin Layout

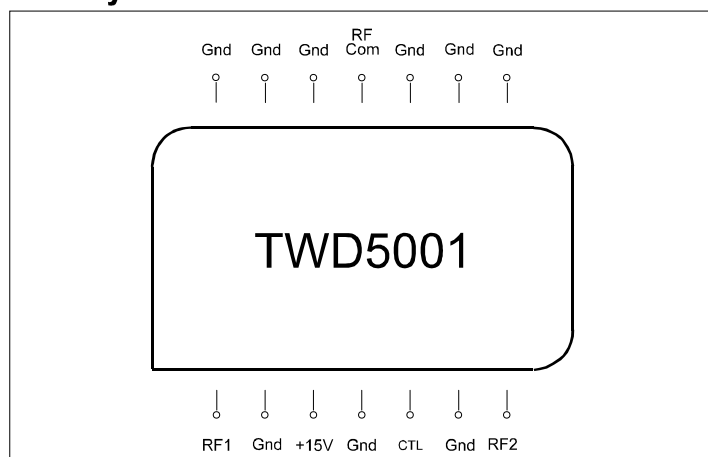

Truth Table

Control Input	Switch Position
TTL	RF Common Connected To
1	RF1
0	RF2

Typical Performance Data

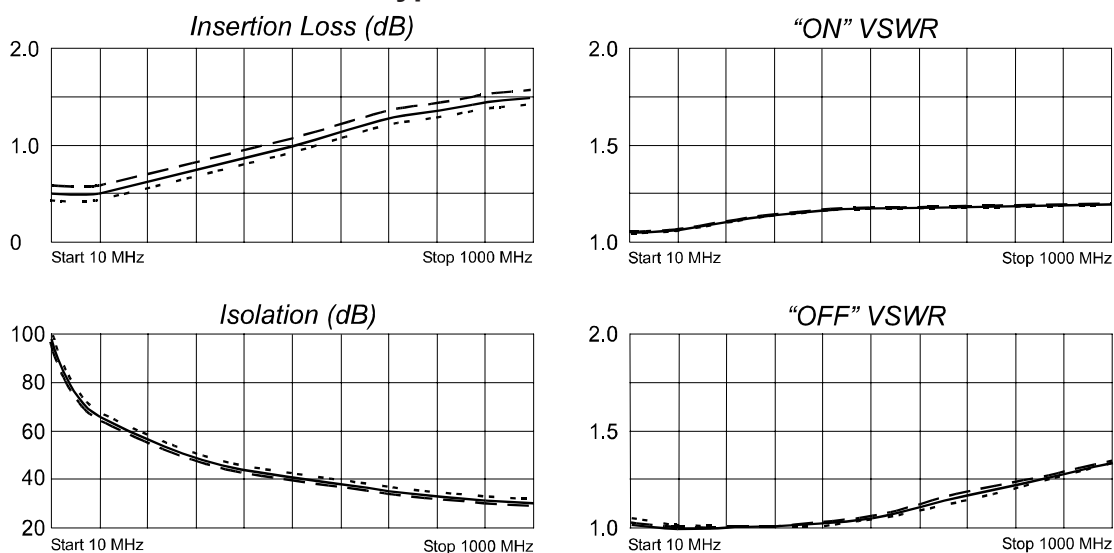

Legend ——— + 25 °C - - - - +85 °C -55 °C



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

Rev.
5/20/10

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001