

RF LIMITER

MODEL *TL9010*

Available as: TL9010, 4 Pin TO-8 (T4)
 TNL9010, 4 Pin Surface Mount (SM3)
 FPL9010, 4 Pin Flatpack (FP4)
 BXL9010, Connectorized Housing (H1)

Features

- Voltage Variable Limiting Level
- Good Even Order Harmonic Suppression
- Low Insertion Loss
- Low VSWR
- 4 Pin TO-8 Metal Hermetic Package
- Operating Temp. -55 °C to + 85°C

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85°C
Frequency (MHz)	5 - 3200 MHz	5 - 3000 MHz
Insertion Loss @ Pin ≤ -20 dBm (Max)	2.0	3.5
5-1000 MHz 1000-3000 MHz	3.0	5.5
Input VSWR (Max) Pin < -10 dBm, +10 Vdc < V bias < +20 Vdc	1.7:1	2.1:1
Output VSWR (Max) Pin < -10 dBm, +10 Vdc < V bias < +20 Vdc	1.7:1	2.2:1
5-1000 MHz 1000-3000 MHz	2.0:1	2.5:1
Output Limiting Level Pin = +20 dBm	2.5	4.5
5-2000 MHz 2000-3000 MHz	6.5	7.0
Bias Current (Max) @ 15Vdc @ 20Vdc	7 10	10 15


Note: Care should always be taken to effectively ground the case of each unit.

Revision 2/22/2012

Absolute Maximum (No Damage) Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 25 Volts
 Continuous RF Input Power + 20 dBm
 Short Term RF Input Power.... 200 Milliwatts (1 Minute Max.)
 Maximum Peak Power..... 0.5 Watt (3 µsec Max.)

Typical Performance Data

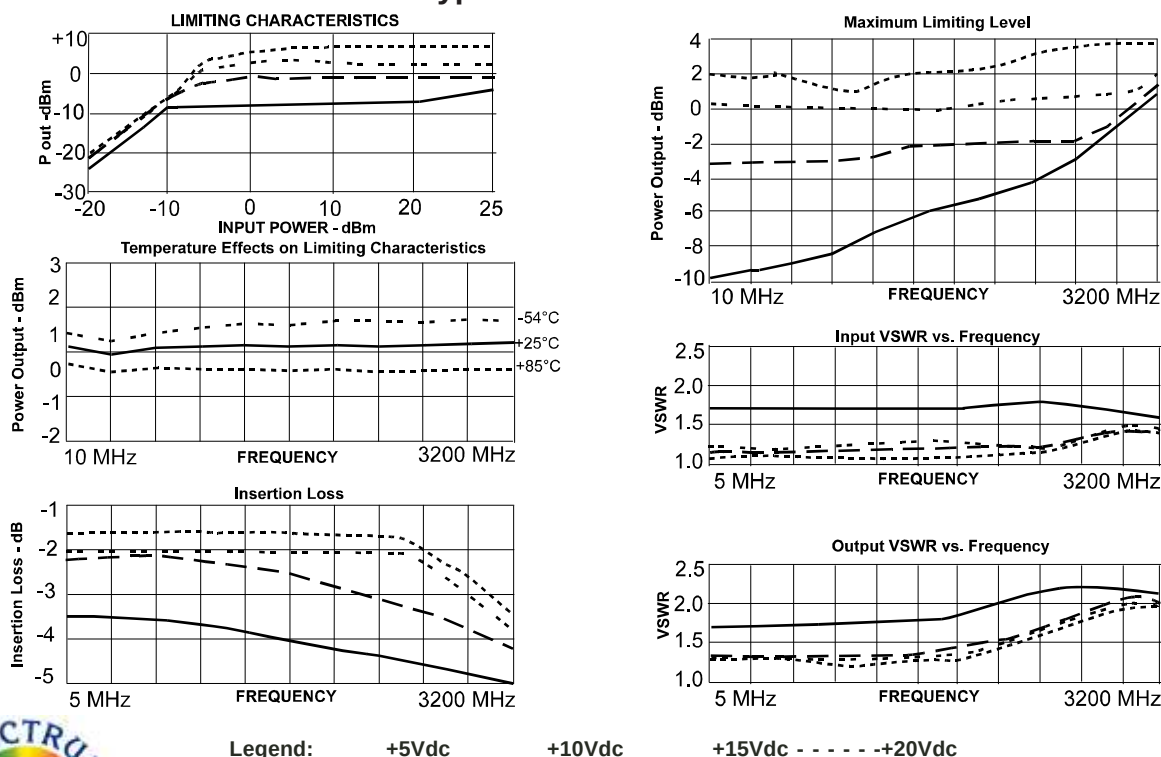

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

www.SpectrumMicrowave.com · Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001