

VOLTAGE CONTROLLED OSCILLATOR

TOM9318

4000 - 5000 MHz

Available as:

- TOM9318, 4 Pin TO-8 (T4)
- TON9318, 4 Pin Surface Mount (SM3)
- TOP9318, 4 Pin Flatpack (FP4)
- BXO9318, Connectorized Housing (H1)

Features

- Low Noise Bipolar Transistor
- Broad Tuning Range
- Operating Case Temp. -55 °C to + 85 °C
- Environmental Screening available

Specifications




CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to + 85 °C
Frequency	4000 - 5000 MHz	4000 - 5000 MHz
Output Power (dBm)	+7	+5 Min.
Power Flatness (dB)	±1.0	±2.0 Max.
Tuning Voltage Range (v)	1 to 15	0 to 20
Tuning Voltage		
Sensitivity (MHz/V)	85	30 Min.
Harmonics (dBc)	-20	-10 Max.
Spurious (dBc)	<-80	-80 Max.
3dB Modulation BW, Zg = 50 Ohm	---	20 Min.
Pushing (MHz/V)	10	20 Max.
Pulling (MHz); 22dB RL	20	40 Max.
Frequency Drift (MHz/°C)	---	-0.5 Max.
Power		
Vdc	+15	+15
mA	25	30 Max.

Maximum Ratings

- Ambient Operating Temperature -54°C to + 100 °C
- Storage Temperature -62°C to + 125 °C
- Case Temperature + 125 °C
- DC Voltage + 20 Volts
- Maximum DC Tuning Voltage + 20 Volts
- Minimum DC Tuning Voltage 0 Volts

Note: Care should always be taken to effectively ground the case of each unit.

Typical Performance Data

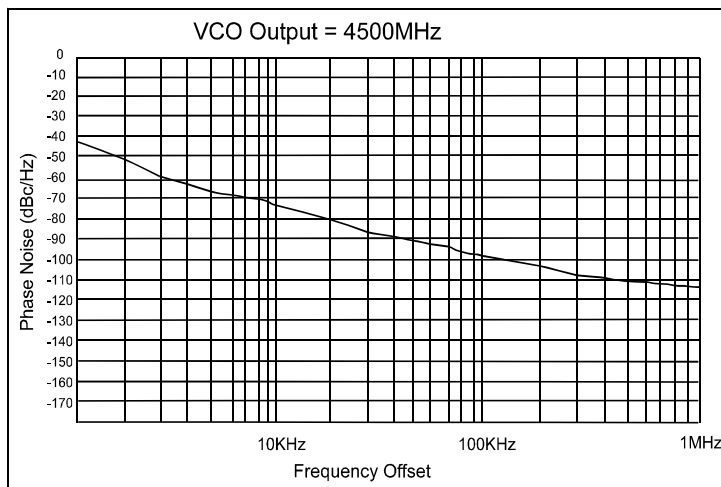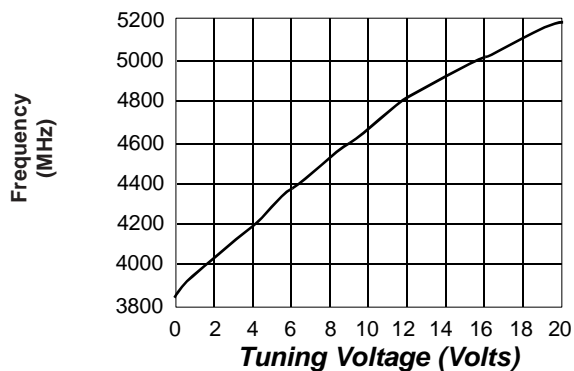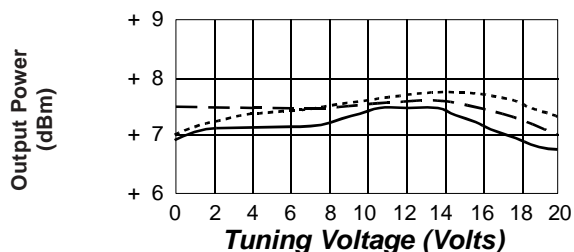

Notes:

1. Phase Noise is measured using the Aeroflex PN9000.
2. Worst case phase noise @ 100KHz offset across frequency range and temperature extremes is -90 dBc/Hz.

Legend ——— + 25 °C - - - - + 85 °C - - - - - -55 °C



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 02/17/05

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001