

3.2 mm x 2.5 mm VCXO

V106A series

Description:

The V106A Voltage-Controlled Crystal Oscillator (VCXO) Series product is a low-cost, mini-footprint VCXO well suited for Wireless PBX, SONET-SDH-ATM, ADSL-XDSL, Video, Broadcasting, and a range of telecommunication applications.



Features:

- Available in frequencies from 5.000 MHz to 40 MHz
- Hermetically sealed ceramic SMD package
- Low Power Consumption
- TTL/HCMOS compatible
- RoHS-6/Leadfree compliant

Frequency Range

Frequency
5 to 40 MHz

Operating Temperature:

Operating Temperature	Product Code
-10 to +70C	A
0 to +70C	B
-20 to 70C	C
-40 to 85C	D

Frequency Stability:

Freq. Stability	Product Code
+/- 25 ppm	A
+/- 30 ppm	B
+/- 50 ppm	C
+/-100ppm	D

Frequency stability only refers to frequency drift over temperature.

Aging: ±3ppm per year (After 30 days of operation)

Supply Voltage (Vs):

Power Supply (Vs)	+1.8 Vdc ±5%	+2.5 Vdc ±5%	3.3 Vdc ±10%
Product Code	A	B	C
Supply Current (Max)	25mA		

Frequency Versus Voltage:

Control Voltage Range (V)		10% VDD – 90% VDD	
Pull Range	Product Code	Pull Range	Product Code
±50ppm	A	±100ppm	D
±75ppm	B	±150ppm	E
±90ppm	C		


Current Consumption (I_{DD}): 25 mA max.

Environmental:

Storage Temperature	-55 to +125 °C
---------------------	----------------

Output Waveform:

		Min	Typical	Max
Output Symmetry	At 50% V _{DD}	40%	50%	60%
Rise Time (nS)	Tr			7
Fall Time (nS)	Tf			7
Output Voltage	V _{OH}	90% V _{DD}		
Output Voltage	V _{OL}			10% V _{DD}
HCMOS load (pF)			15.0	

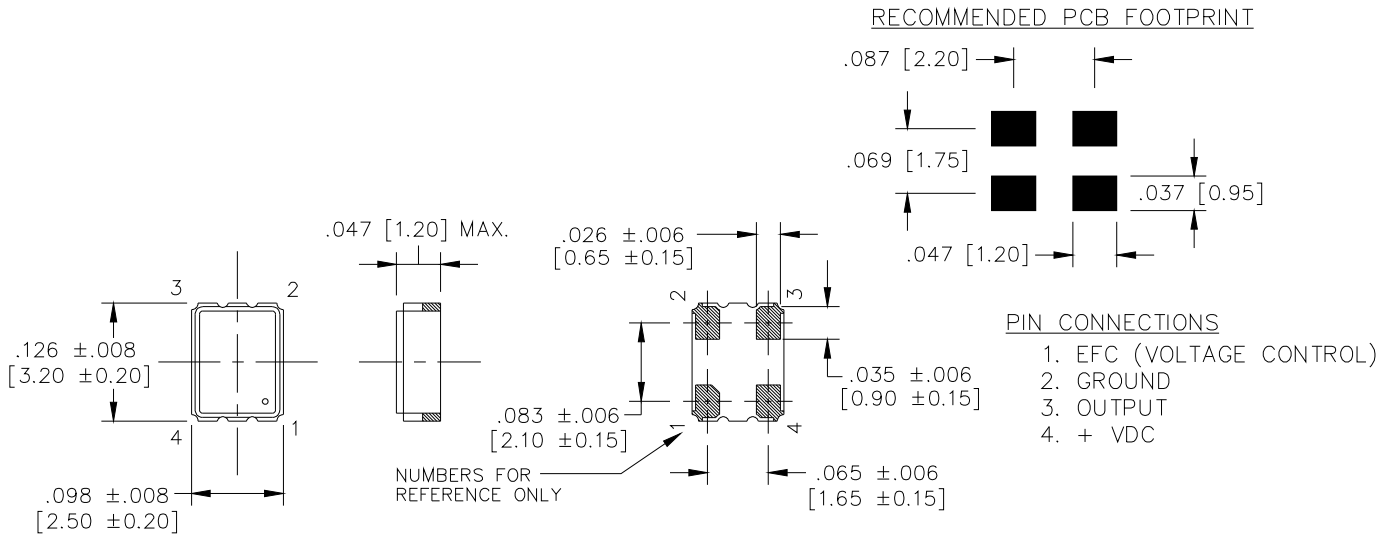

Ordering Options:

Product Family	Operating Temperature	Frequency Stability	Supply Voltage	Frequency versus Voltage	Operating Frequency
V106A	A	A	A	A	XX.XXXX MHz
	B	B	B	B	
	C	C	C	C	
	D	D		D	
				E	

V106A C A C A 10.0000MHz
Part Number Build Example

****Consult Bliley sales if other options required**

**RoHs compliant; -20 to 70C; +/- 25 ppm with a 3.3 volt supply; +/- 50 ppm pull Range
 10 MHz nominal operating frequency.**