

SMD Power Inductor CDH2D09B



Halogen Free



Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 3.0 × 2.8 × 1.0 mm Max.
- Product weight: 23mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 7.0" diameter reel
- 1500pcs per reel


Applications

- Ideally used in Mobilephone, PDA, MP3, HDD, DSC/DVC, etc as DC-DC inverter inductors.

Dimension - [mm]

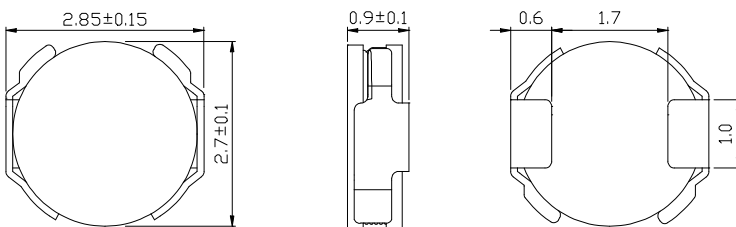

Land pattern and Schematics - [mm]

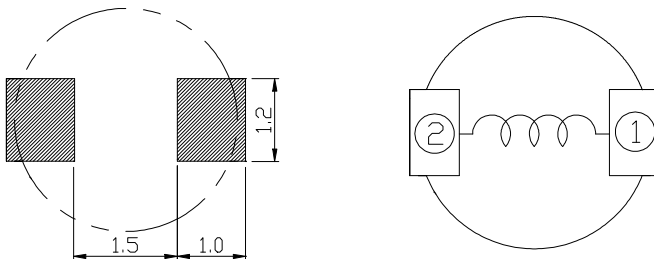

Electrical Characteristics


Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (m Ω) [Max.] (Typ.) (at 20°C)	Saturation Current (A) ※2	Temperature Rise Current (A) ※3
CDH2D09BNP-2R4MC	E	2.4 ± 20%	160(128)	1.00	1.18
CDH2D09BNP-3R3MC	F	3.3 ± 20%	188(150)	0.85	1.06
CDH2D09BNP-4R7MC	G	4.7 ± 20%	273(218)	0.70	0.85
CDH2D09BNP-6R4MC	J	6.4 ± 20%	400(320)	0.60	0.64
CDH2D09BNP-100MC	L	10 ± 20%	588(470)	0.48	0.47
CDH2D09BNP-150MC	M	15 ± 20%	956(765)	0.38	0.39
CDH2D09BNP-220MC	P	22 ± 20%	1313(1050)	0.31	0.34

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.








※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor CDH2D09B

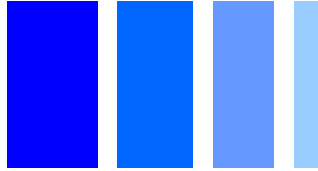

Saturation Current & Temperature Rise Graph



— L (20°C) — L (105°C) — ΔT

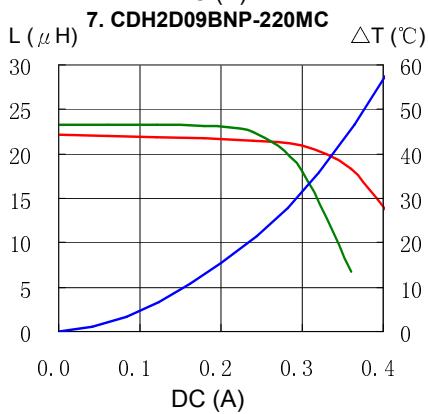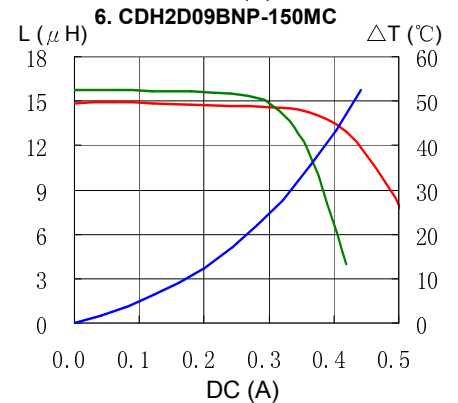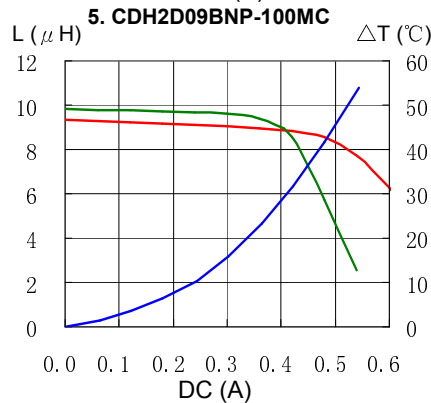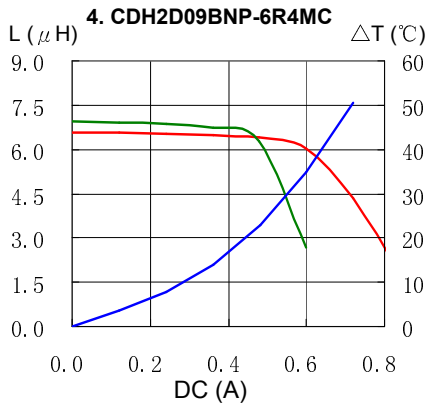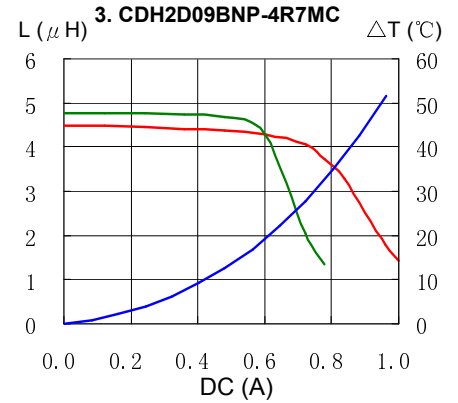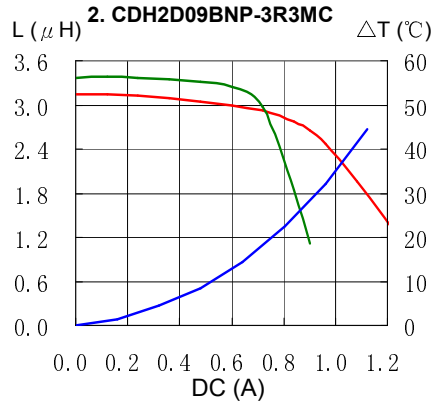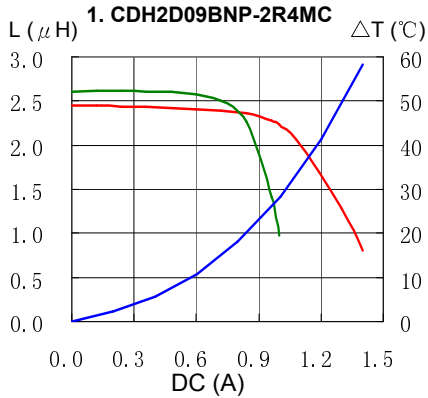

SMD Power Inductor CDH2D09B



Solder Reflow Condition

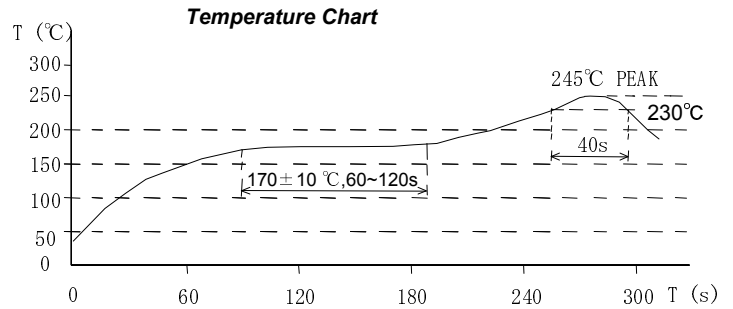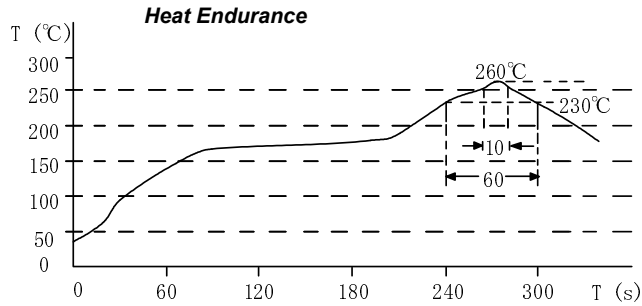

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6688
FAX.+852-2565-9600
sales@hk.sumida.com

Tokyo

Tel.+81-3-5202-7112
FAX.+81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-021-5836-3299
FAX.+86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com