

SMD Power Inductor CDRH5D18B/HP




Halogen
Free




Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 6.3 × 6.2 × 2.0 mm Max.
- Product weight: 230mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Dimension - [mm]

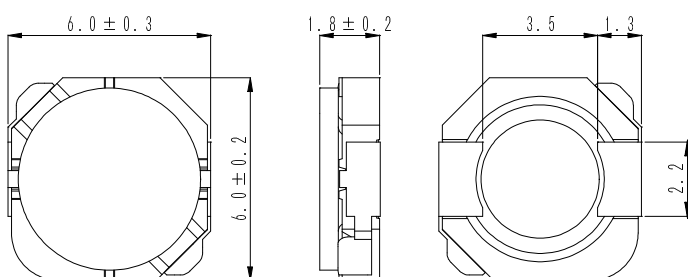

Land pattern and Schematics - [mm]

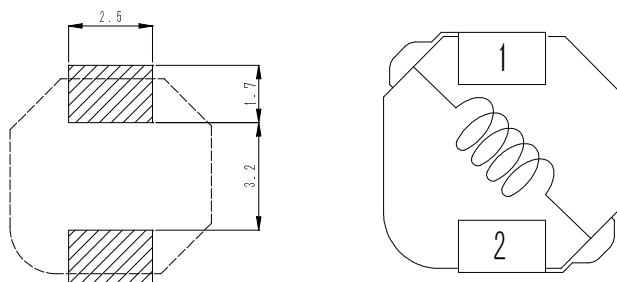

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging
- 12.9" diameter reel
- 2000pcs per reel

Applications

- Ideally used in Mobile phone, MP3, PDA, HDD, DSC/DVC, Game machine, etc as DC-DC converter inductors

Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (m Ω) Max. (Typ.) (at 20°C)	Saturation Current (A) ※2		Temperature Rise Current (A) ※3
				at 20°C	at 100°C	
CDRH5D18BHPNP-0R6MC	0R6	0.6 ± 20%	25 (19)	8.2	6.8	4.4
CDRH5D18BHPNP-1R0MC	1R0	1.0 ± 20%	31 (24)	6.6	5.6	3.7
CDRH5D18BHPNP-1R5MC	1R5	1.5 ± 20%	38 (29)	5.3	4.6	2.8
CDRH5D18BHPNP-1R8MC	1R8	1.8 ± 20%	46 (35)	5.0	4.1	2.5
CDRH5D18BHPNP-2R7MC	2R7	2.7 ± 20%	65 (50)	3.9	3.3	2.3
CDRH5D18BHPNP-3R3MC	3R3	3.3 ± 20%	78 (60)	3.4	2.9	2.0
CDRH5D18BHPNP-4R2MC	4R2	4.2 ± 20%	98 (75)	3.1	2.5	1.8
CDRH5D18BHPNP-5R0MC	5R0	5.0 ± 20%	109 (84)	2.7	2.4	1.7

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 65% of its nominal value.









※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor CDRH5D18B/HP



Saturation Current & Temperature Rise Graph



— L (20°C) — L (105°C) — ΔT

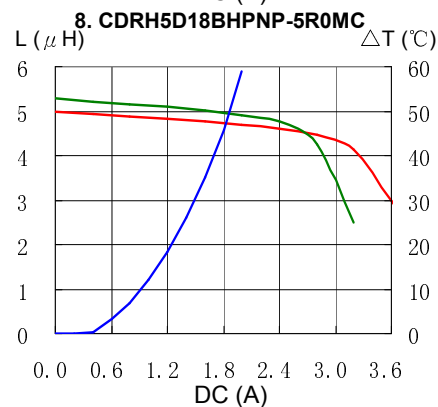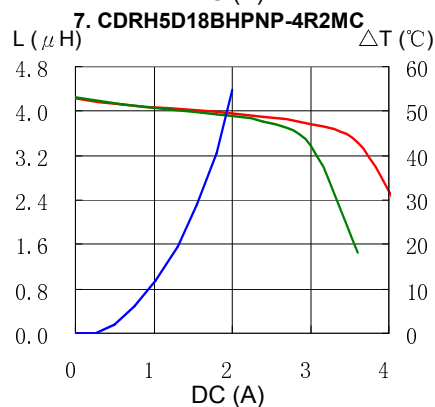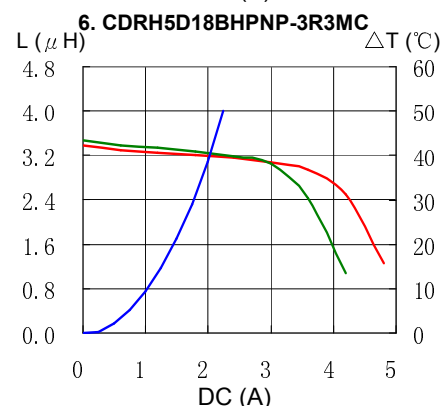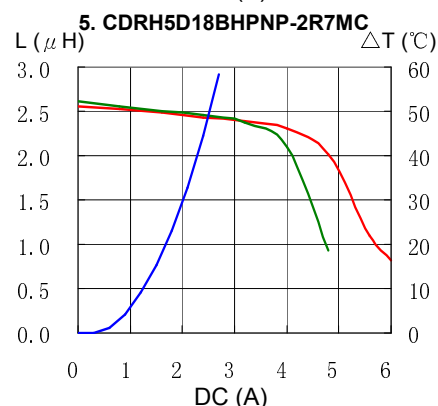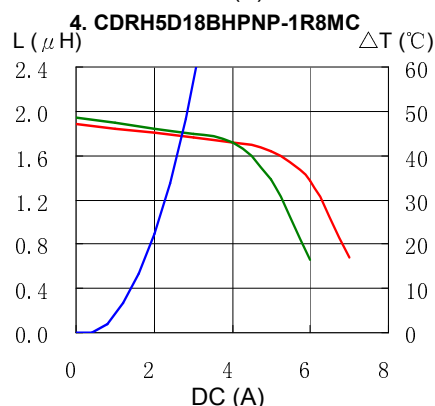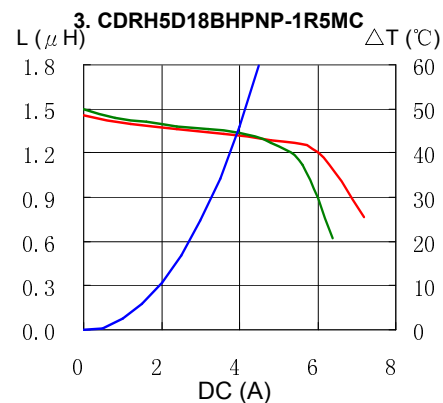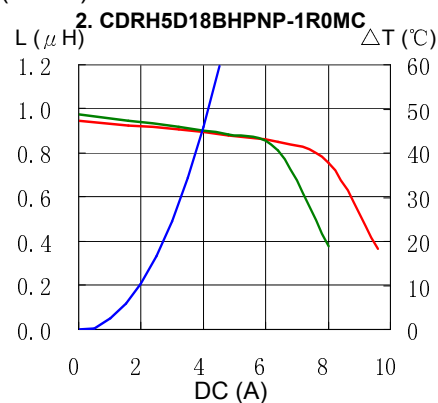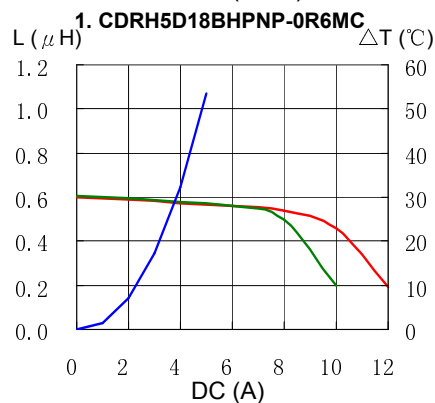

SMD Power Inductor CDRH5D18B/HP



Solder Reflow Condition

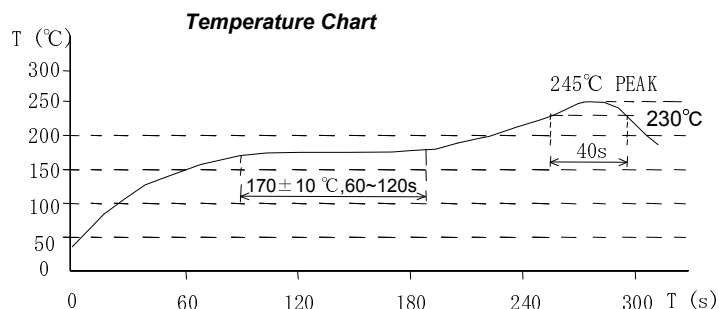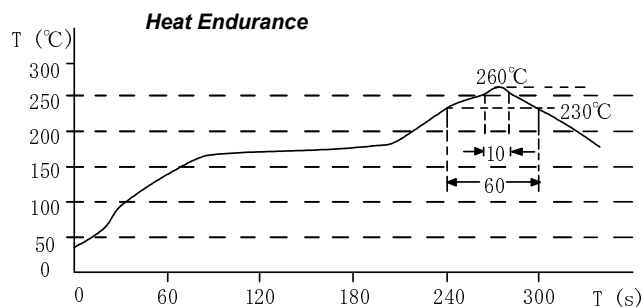

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
info@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com