


SMD Power Inductor CDRH6D18/HP




Halogen
Free





Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 7.0 × 7.0 × 2.0 mm Max.
- Product weight: 0.38g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.


Dimension - [mm]

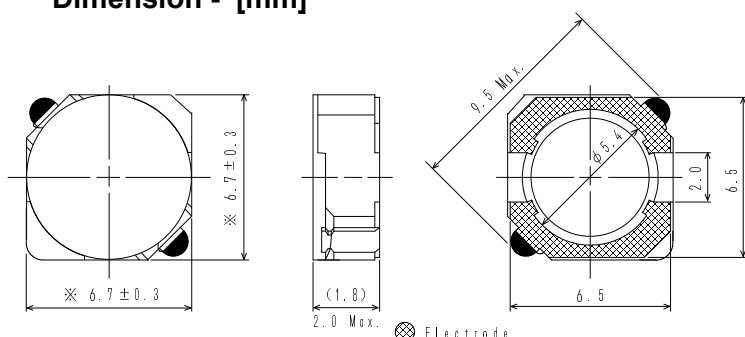

Land pattern and Schematics - [mm]



(1.0 μ H ~ 8.2 μ H)



(10 μ H ~ 120 μ H)

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging
- 12.9" diameter reel
- 2000pcs per reel

Applications

- Ideally used in PDA ,HDD,DSC/DVC, etc as DC-DC converter inductors.

SMD Power Inductor CDRH6D18/HP



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (m Ω) [within] (at 20°C)	Saturation Current (A) ※2		Temperature Rise Current (A) ※3
				at 20°C	at 105°C	
CDRH6D18HPNP-1R0PC	1R0	1.0 $\pm$ 25%	18.5 $\pm$ 25%	5.50	4.60	4.00
CDRH6D18HPNP-1R8PC	1R8	1.8 $\pm$ 25%	24.0 $\pm$ 25%	4.50	3.50	3.50
CDRH6D18HPNP-2R7PC	2R7	2.7 $\pm$ 25%	35.5 $\pm$ 25%	3.60	3.00	2.75
CDRH6D18HPNP-3R9PC	3R9	3.9 $\pm$ 25%	45.5 $\pm$ 25%	3.00	2.50	2.35
CDRH6D18HPNP-4R7PC	4R7	4.7 $\pm$ 25%	53.0 $\pm$ 25%	2.80	2.35	2.20
CDRH6D18HPNP-6R8PC	6R8	6.8 $\pm$ 25%	82.0 $\pm$ 25%	2.35	1.95	1.70
CDRH6D18HPNP-8R2PC	8R2	8.2 $\pm$ 25%	98.0 $\pm$ 25%	2.10	1.80	1.50
CDRH6D18HPNP-100PC	100	10 $\pm$ 25%	125 $\pm$ 25%	1.95	1.60	1.30
CDRH6D18HPNP-150PC	150	15 $\pm$ 25%	190 $\pm$ 25%	1.60	1.30	1.10
CDRH6D18HPNP-220PC	220	22 $\pm$ 25%	220 $\pm$ 25%	1.35	1.10	1.00
CDRH6D18HPNP-330PC	330	33 $\pm$ 25%	374 $\pm$ 25%	1.10	0.90	0.70
CDRH6D18HPNP-470PC	470	47 $\pm$ 25%	535 $\pm$ 25%	0.90	0.70	0.60
CDRH6D18HPNP-560PC	560	56 $\pm$ 25%	605 $\pm$ 25%	0.85	0.65	0.55
CDRH6D18HPNP-680PC	680	68 $\pm$ 25%	758 $\pm$ 25%	0.70	0.60	0.50
CDRH6D18HPNP-820PC	820	82 $\pm$ 25%	859 $\pm$ 25%	0.65	0.58	0.45
CDRH6D18HPNP-101PC	101	100 $\pm$ 25%	970 $\pm$ 25%	0.60	0.55	0.40
CDRH6D18HPNP-121PC	121	120 $\pm$ 25%	1290 $\pm$ 25%	0.58	0.50	0.35

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

SMD Power Inductor CDRH6D18/HP



Saturation Current & Temperature Rise Graph


— L (20°C) — L (105°C) — ΔT

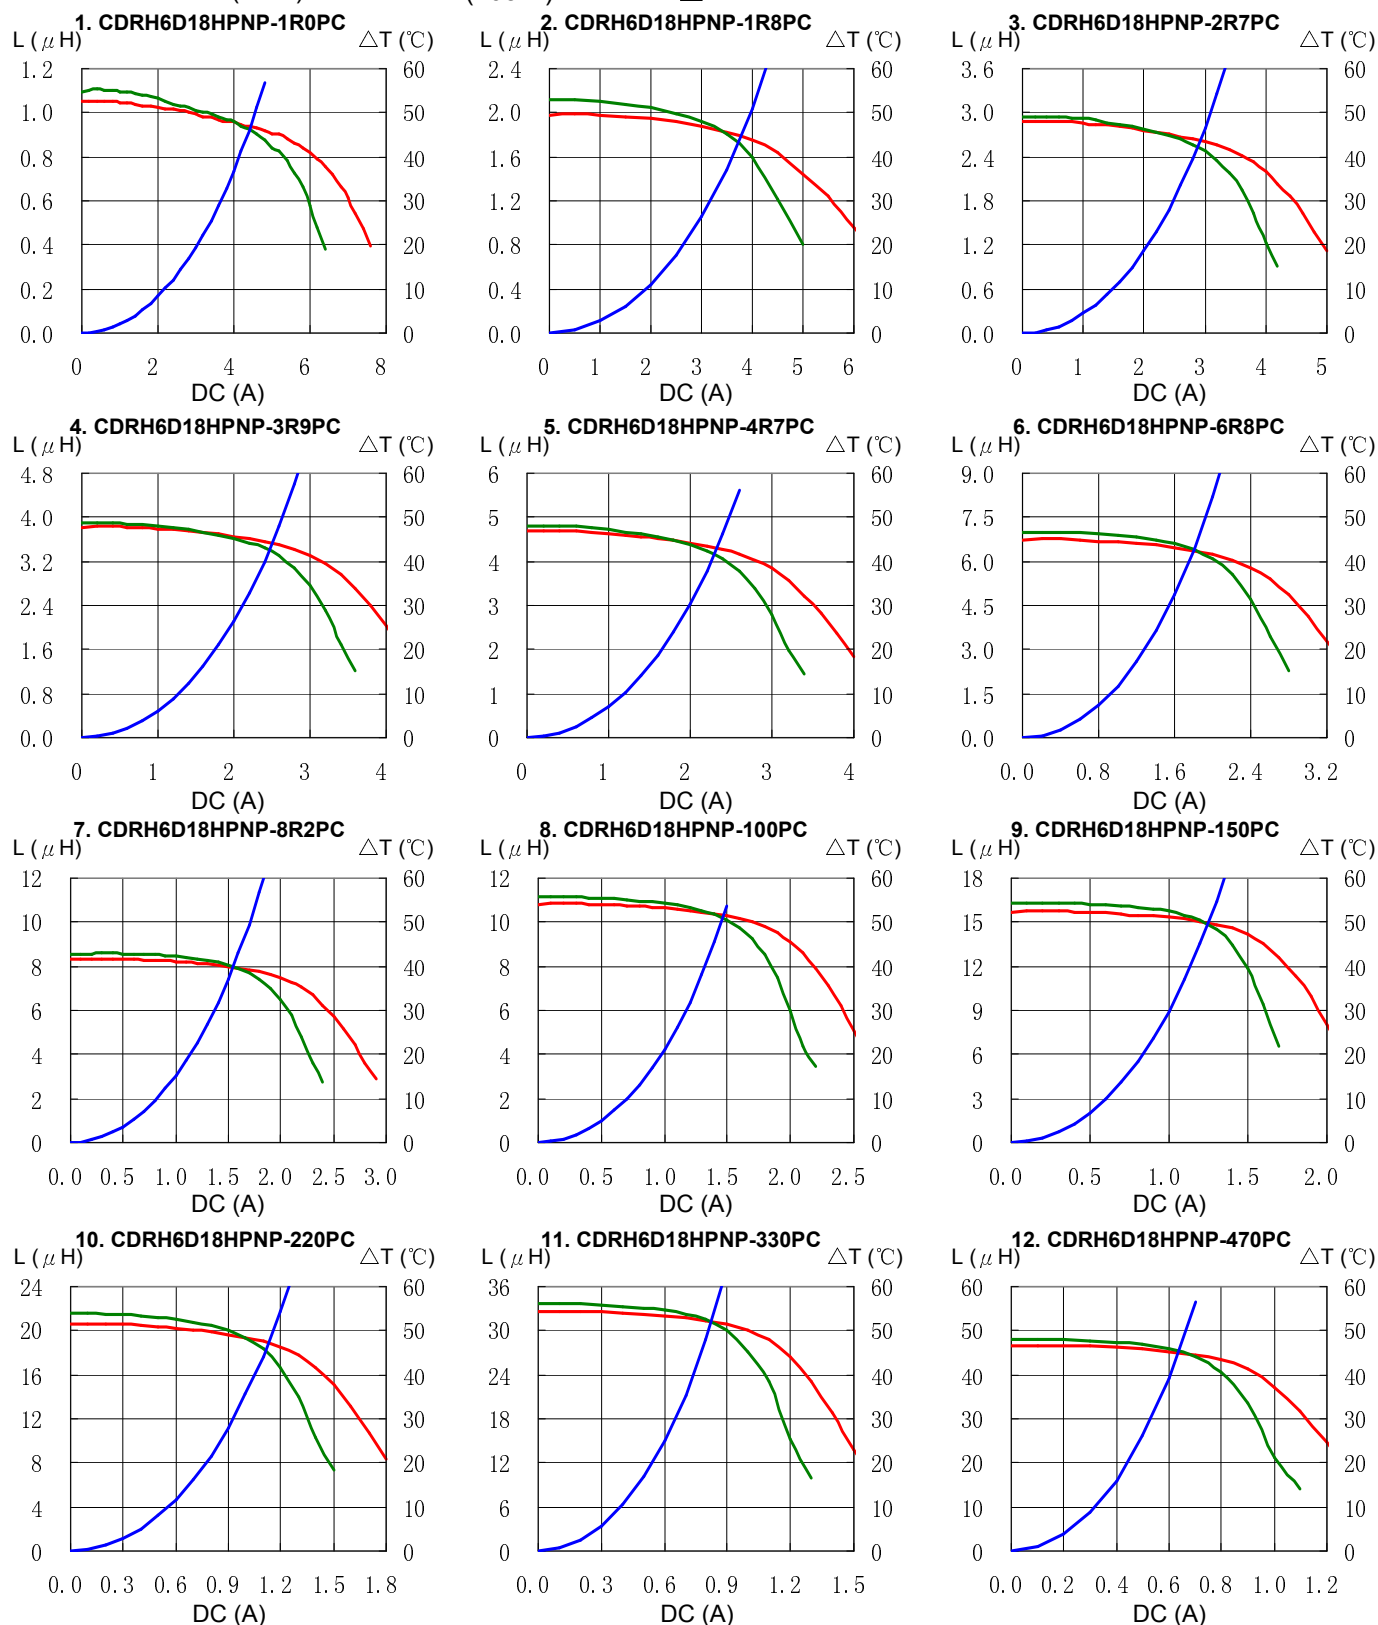


SMD Power Inductor CDRH6D18/HP



Saturation Current & Temperature Rise Graph

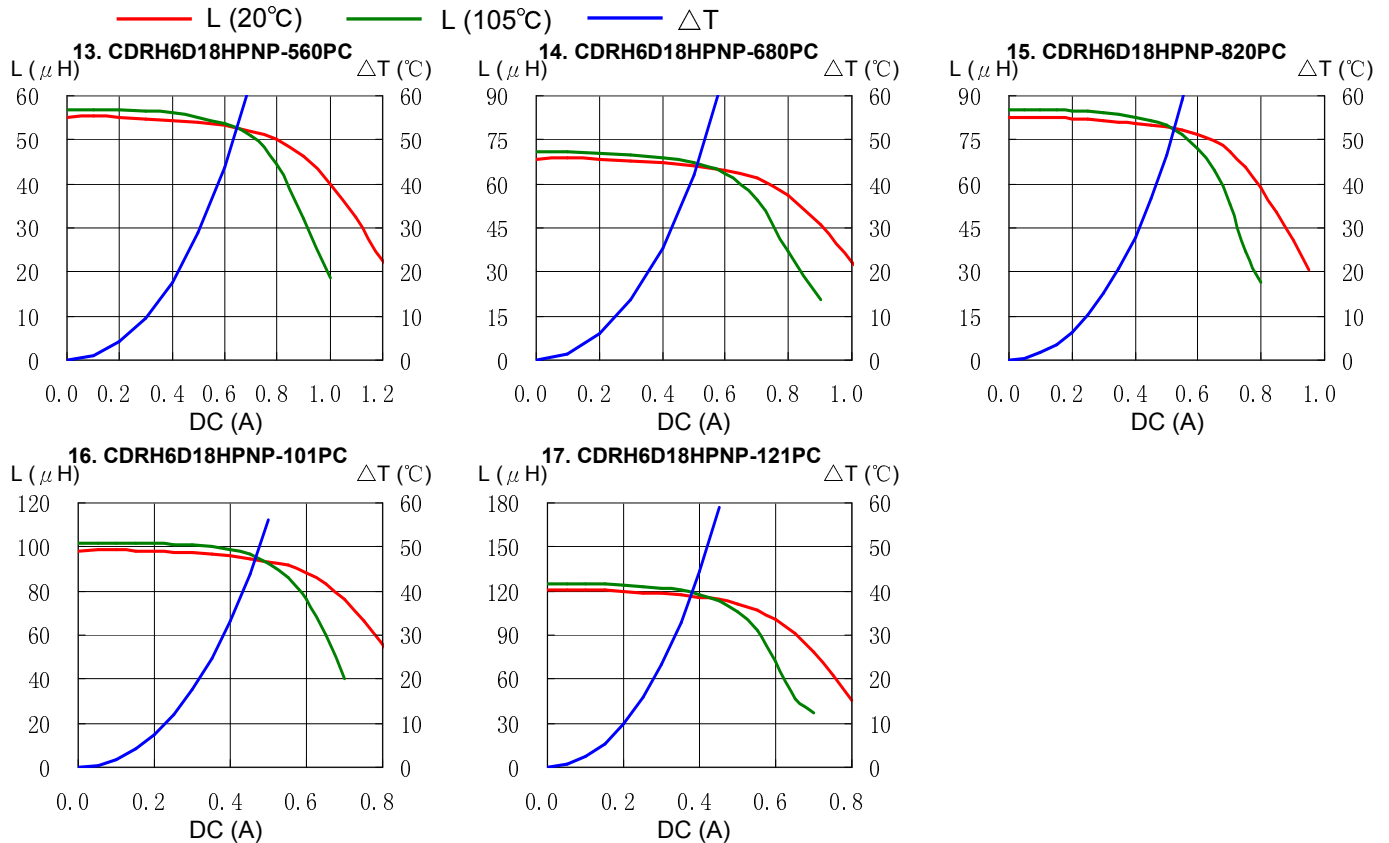

Solder Reflow Condition

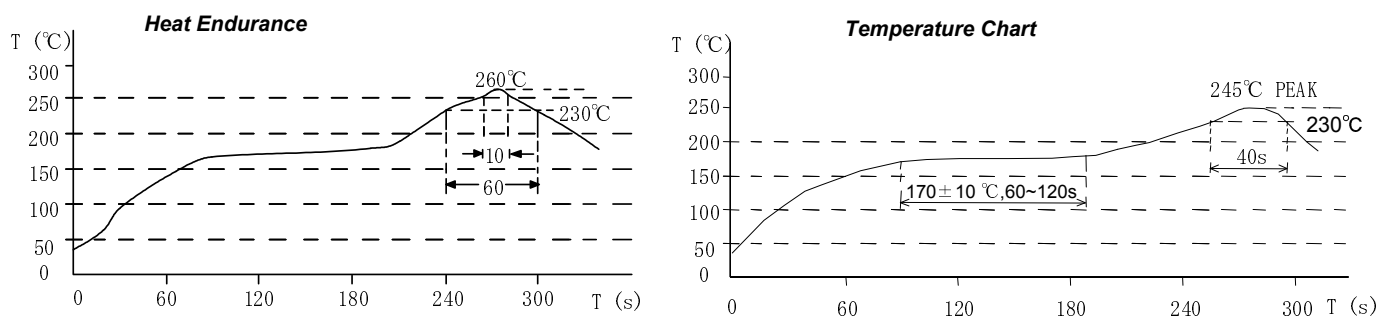

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
info@comp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com