


SMD Power Inductor CDRH40D26R



Under Development



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 4.2 × 4.2 × 2.8mm Max.
- Product weight: 150mg (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging


Applications

- Ideally used in Mobile phone, PDA, MP3, HDD, DSC/DVC, Note book PC, etc as DC-DC converter inductors.


Dimension - [mm]

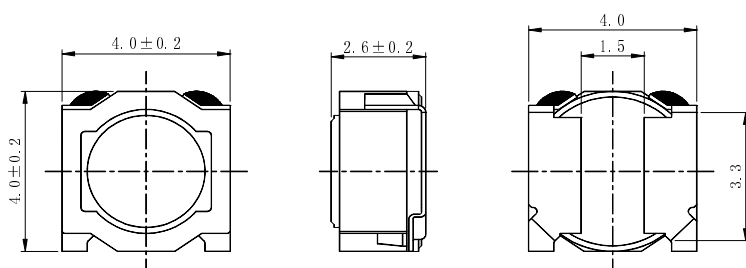

Land pattern and Schematics - [mm]

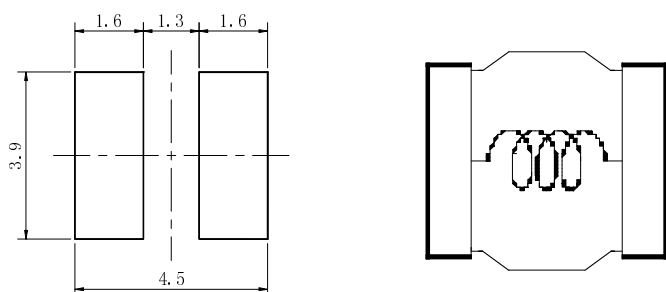

SMD Power Inductor CDRH40D26R



Under Development

Electrical Characteristics


Part name	Inductance [μ H] [Within] ※1	D.C.R. (m Ω) [Max.] (Typ.) (at 20°C)	Saturation Current (A) ※2		Temperature Rise Current (A) ※3
			(at 20°C)	(at 105°C)	
CDRH40D26RNP-1R8NC	1.8 $\pm$ 30%	42.1(33.7)	2.35	1.95	2.90
CDRH40D26RNP-2R4NC	2.4 $\pm$ 30%	46.1(36.9)	2.20	1.85	2.60
CDRH40D26RNP-3R3NC	3.3 $\pm$ 30%	57.5(46.0)	1.85	1.55	2.50
CDRH40D26RNP-3R9NC	3.9 $\pm$ 30%	83.3(66.6)	1.70	1.45	1.80
CDRH40D26RNP-4R7NC	4.7 $\pm$ 30%	91.4(73.1)	1.55	1.25	1.75
CDRH40D26RNP-6R8NC	6.8 $\pm$ 30%	119(95.0)	1.30	1.10	1.60
CDRH40D26RNP-100MC	10 $\pm$ 20%	166(138)	1.05	0.85	1.35
CDRH40D26RNP-150MC	15 $\pm$ 20%	260(217)	0.85	0.69	1.05
CDRH40D26RNP-220MC	22 $\pm$ 20%	320(267)	0.70	0.60	0.95
CDRH40D26RNP-330MC	33 $\pm$ 20%	524(437)	0.55	0.45	0.65
CDRH40D26RNP-470MC	47 $\pm$ 20%	764(637)	0.50	0.40	0.55

※1 Inductance measuring condition at 100kHz.

※2 Saturation current: The value of DC current when the inductance is over 70% of its nominal value.

※3 Temperature rise current: The value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

SMD Power Inductor CDRH40D26R














sumida

Under Development

Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

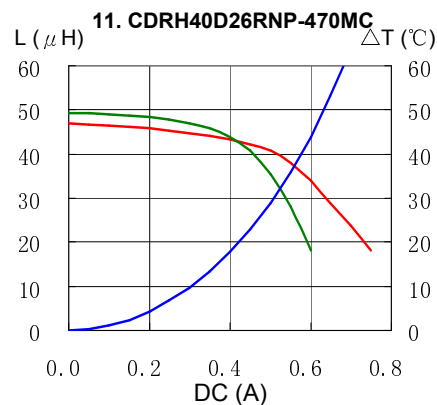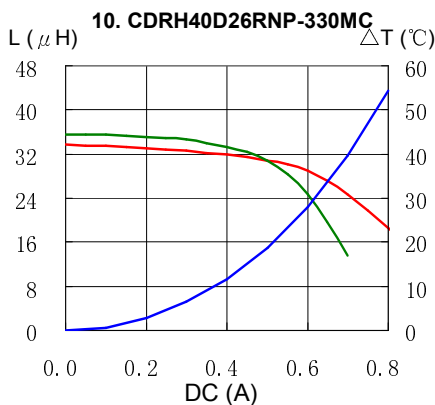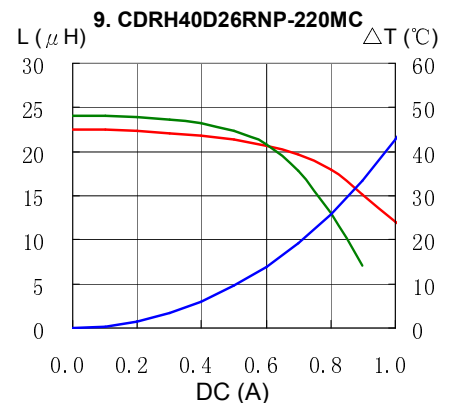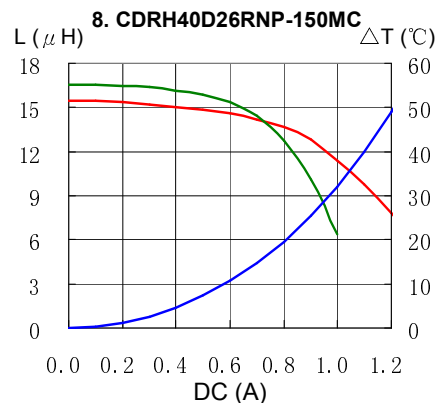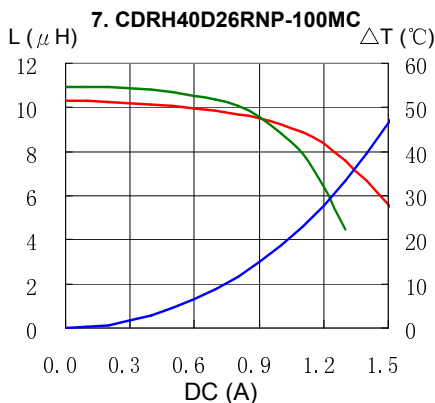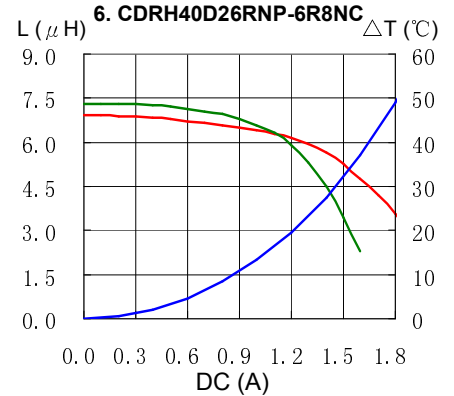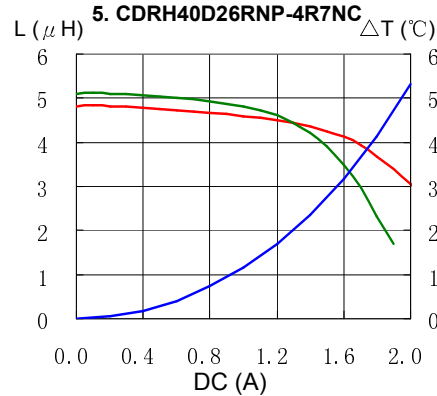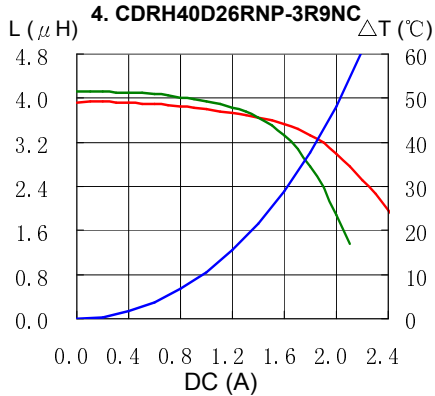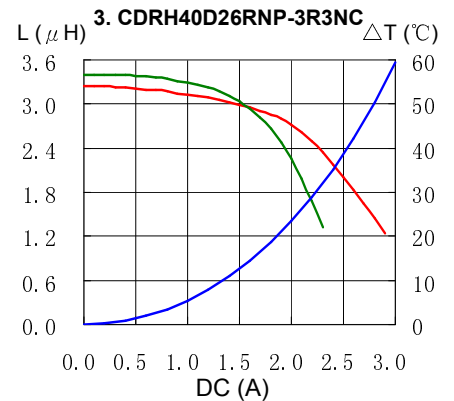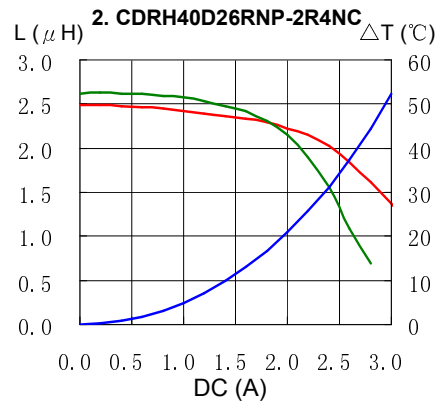
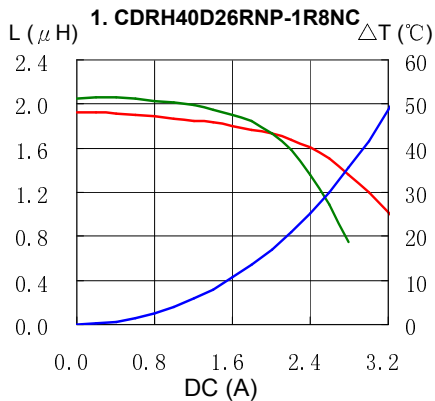


SMD Power Inductor CDRH40D26R



Under Development

Solder Reflow Condition

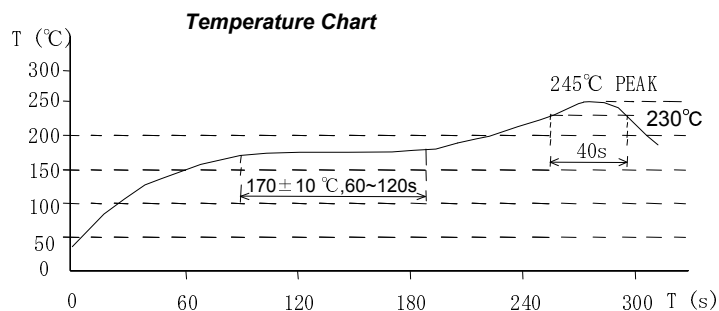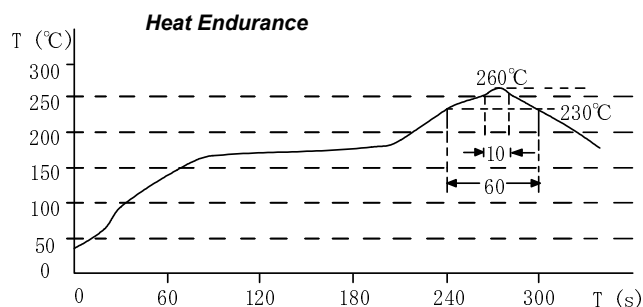

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com