

SMD Power Inductor CDRH80D38D



Halogen
Free



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 8.3 × 8.3 × 4.0 mm Max.
- Product weight: 1.0g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 13" diameter reel
- 1000pcs per reel



Applications

- Ideally used in Game machine, Notebook PC, DVD/DVC, LCD TV, STB, etc as DC-DC converter inductors.


Dimension - [mm]

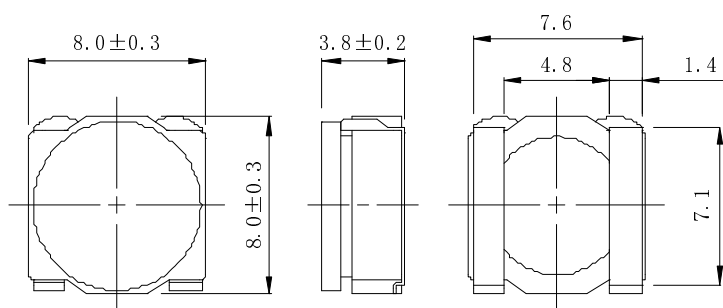

Land pattern and Schematics - [mm]



(1.0 μH ~ 6.8 μH)



(10 μH ~ 220 μH)

SMD Power Inductor CDRH80D38D



Electrical Characteristics

Part No.	Stamp	Inductance (μ H) [Within] ※1	D.C.R. (m Ω) [Within] (at 20°C)	Saturation current (A) ※2		Temperature rise current(A) ※3
				(at 20°C)	(at 105°C)	
CDRH80D38DNP-1R0PC	1R0	1.0 $\pm$ 25%	7.0 $\pm$ 25%	11.55	9.50	9.30
CDRH80D38DNP-1R5PC	1R5	1.5 $\pm$ 25%	9.0 $\pm$ 25%	9.35	7.95	7.70
CDRH80D38DNP-2R2PC	2R2	2.2 $\pm$ 25%	10 $\pm$ 25%	7.80	6.60	6.90
CDRH80D38DNP-3R3PC	3R3	3.3 $\pm$ 25%	13 $\pm$ 25%	6.30	5.25	6.30
CDRH80D38DNP-4R7PC	4R7	4.7 $\pm$ 25%	16 $\pm$ 25%	5.20	4.30	5.60
CDRH80D38DNP-6R8MC	6R8	6.8 $\pm$ 20%	26 $\pm$ 25%	4.25	3.70	4.10
CDRH80D38DNP-100MC	100	10 $\pm$ 20%	35 $\pm$ 25%	3.65	3.10	3.50
CDRH80D38DNP-150MC	150	15 $\pm$ 20%	47 $\pm$ 25%	2.95	2.40	3.00
CDRH80D38DNP-220MC	220	22 $\pm$ 20%	65 $\pm$ 25%	2.40	2.10	2.60
CDRH80D38DNP-330MC	330	33 $\pm$ 20%	105 $\pm$ 20%	1.95	1.60	2.00
CDRH80D38DNP-470MC	470	47 $\pm$ 20%	160 $\pm$ 20%	1.60	1.40	1.50
CDRH80D38DNP-680MC	680	68 $\pm$ 20%	245 $\pm$ 20%	1.35	1.10	1.22
CDRH80D38DNP-101MC	101	100 $\pm$ 20%	310 $\pm$ 20%	1.15	0.95	1.09
CDRH80D38DNP-151MC	151	150 $\pm$ 20%	470 $\pm$ 20%	0.95	0.75	0.88
CDRH80D38DNP-221MC	221	220 $\pm$ 20%	705 $\pm$ 20%	0.75	0.60	0.70

※1. Measuring condition: at 100kHz.


※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).




SMD Power Inductor CDRH80D38D





Saturation Current & Temperature Rise Graph

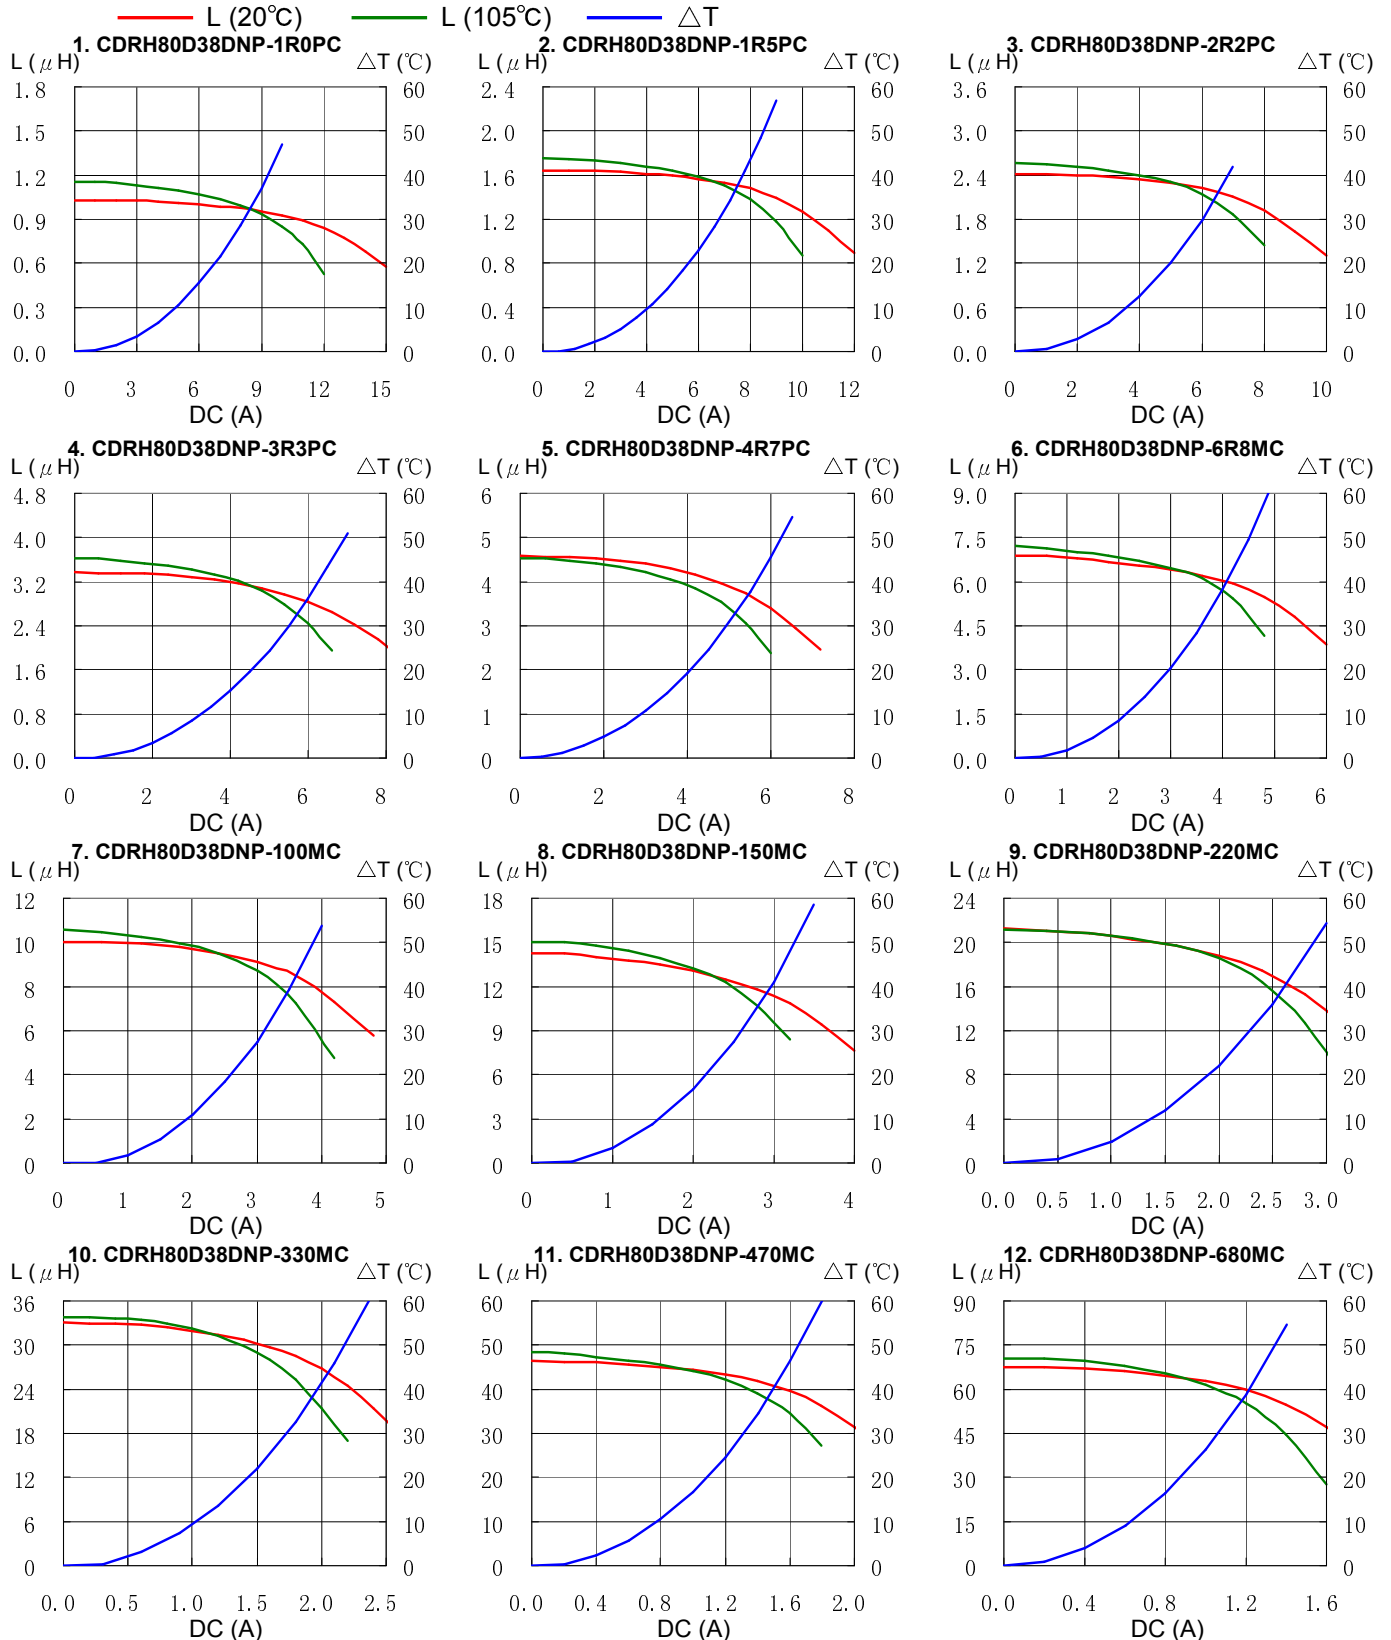

SMD Power Inductor CDRH80D38D

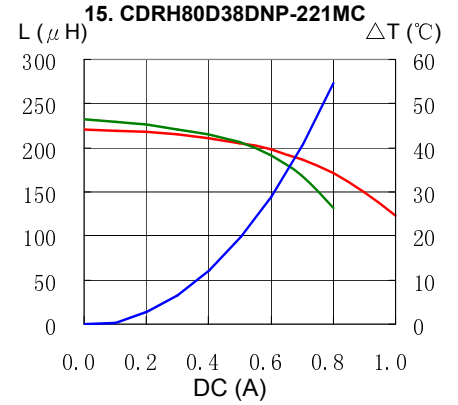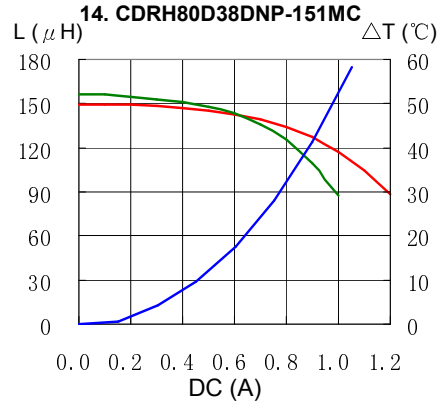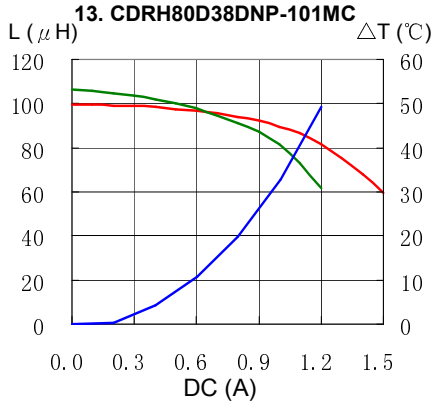

Solder Reflow Condition

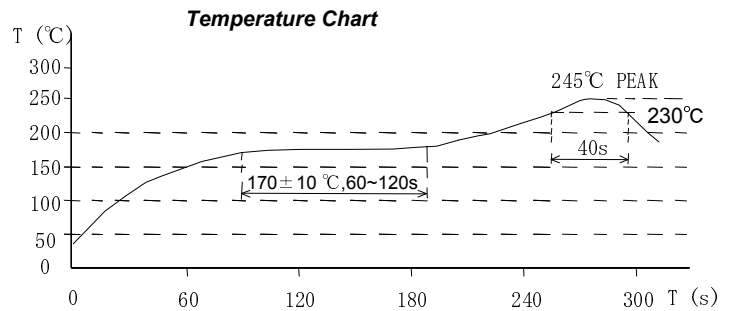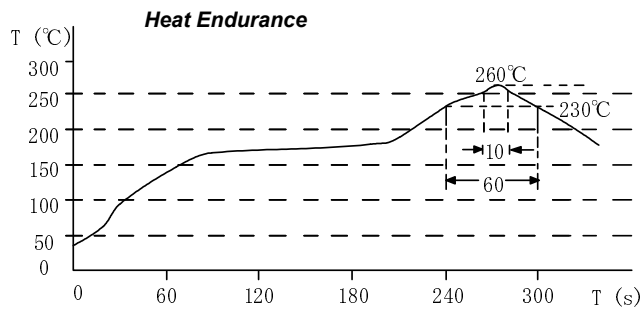

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
info@comp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com