


SMD Power Inductor CDH70D48



sumida

Under Development




**Halogen
Free**




Description

- Ferrite drum core construction
- Magnetically unshielded
- L × W × H: 7.98 × 7.15 × 5.0 mm Max.
- Product weight: 0.8g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Dimension - [mm]

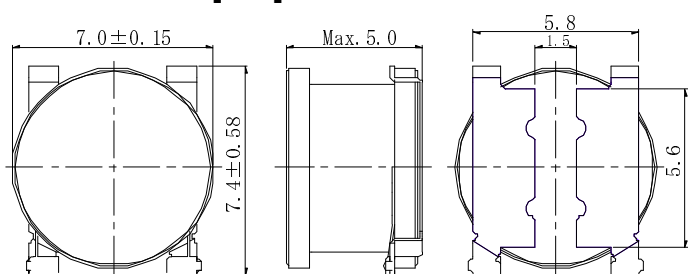

Land pattern and Schematics - [mm]

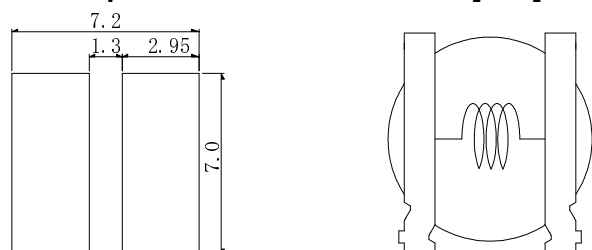

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging

Applications

- Ideally used in input filter of LED lighting.

Electrical Characteristics

Part No.	Stamp	Inductance (μ H) [Within] ※1	D.C.R. (Ω) [Max.] (typ.) (at 20°C)	Saturation current (mA) ※2		Temperature rise current (mA) ※3
				at 20°C	at 105°C	
CDH70D48NP-101K	101	100 ± 10%	0.38(0.30)	860	710	910
CDH70D48NP-151K	151	150 ± 10%	0.54(0.43)	700	580	740
CDH70D48NP-221K	221	220 ± 10%	0.83(0.66)	550	450	580
CDH70D48NP-331K	331	330 ± 10%	1.18(0.94)	470	390	500
CDH70D48NP-471K	471	470 ± 10%	1.63(1.36)	370	310	400
CDH70D48NP-681K	681	680 ± 10%	2.30(1.92)	310	260	330
CDH70D48NP-102K	102	1000 ± 10%	3.56(2.97)	250	210	260
CDH70D48NP-152K	152	1500 ± 10%	6.02(5.02)	210	170	200
CDH70D48NP-222K	222	2200 ± 10%	8.63(7.19)	175	140	165
CDH70D48NP-332K	332	3300 ± 10%	13.6(11.3)	145	110	130
CDH70D48NP-472K	472	4700 ± 10%	20.4(17.0)	120	95	105

※1. Measuring condition :at 100kHz

※2. Saturation current: The value of D.C. current when the inductance decreases to 90% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).












SMD Power Inductor CDH70D48




Under Development

Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

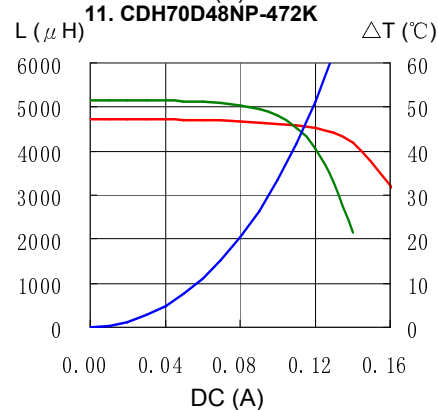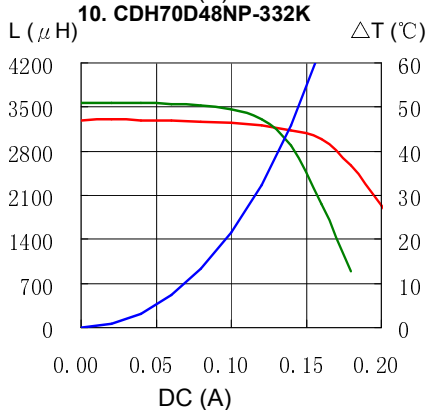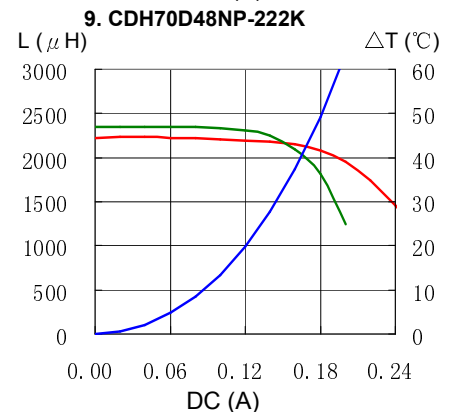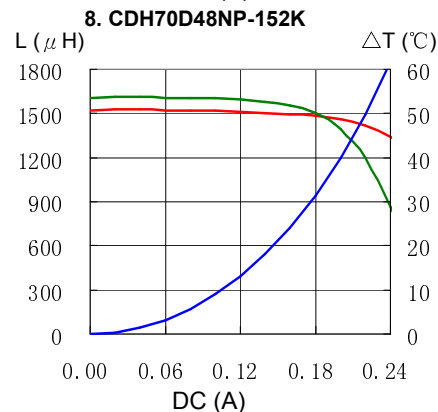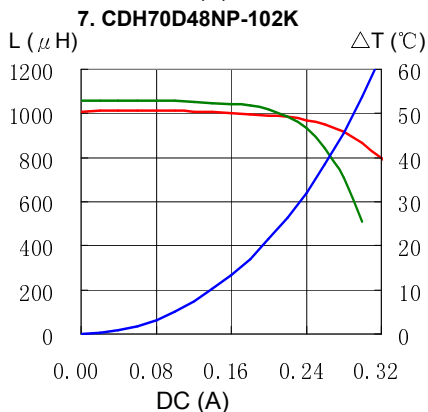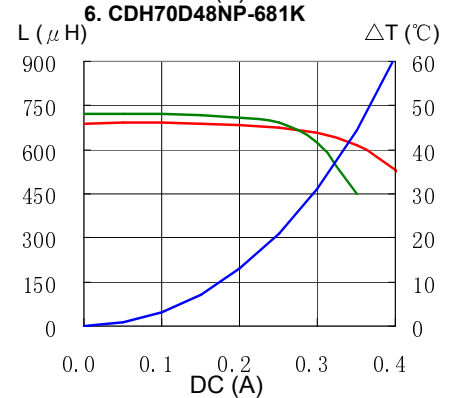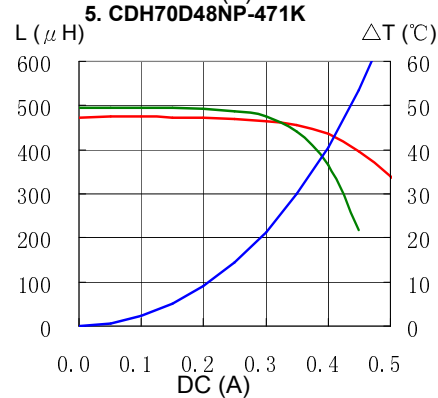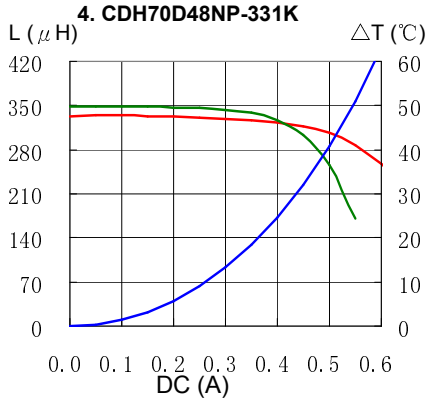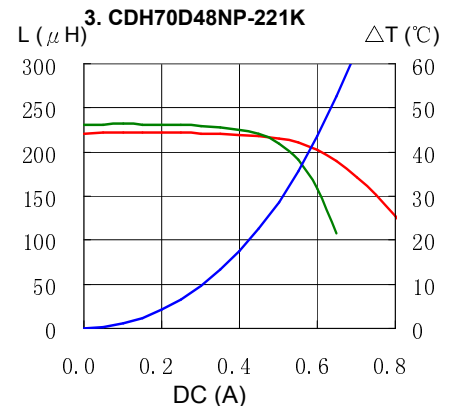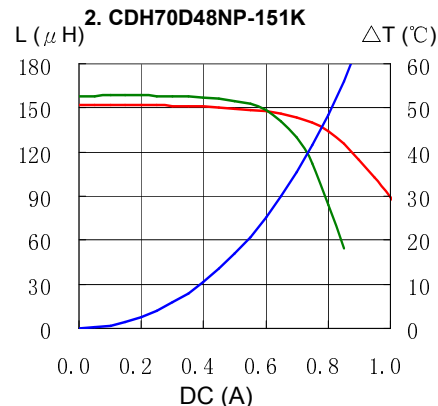
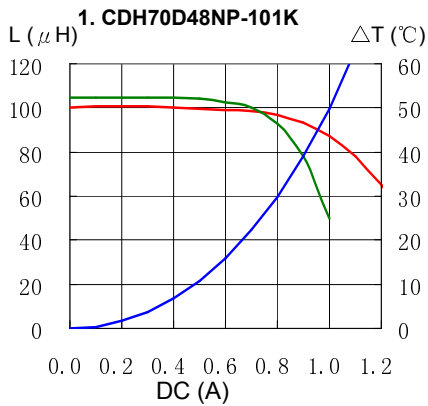


SMD Power Inductor CDH70D48



Under Development

Solder Reflow Condition

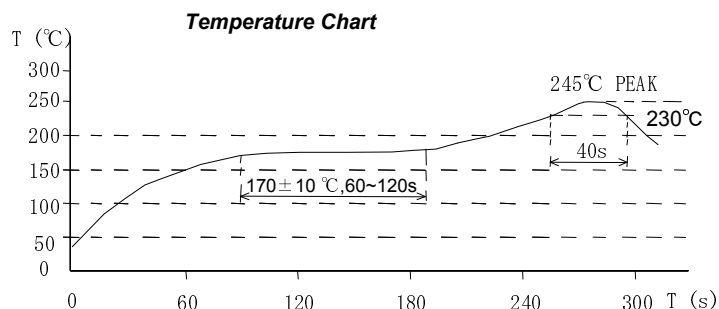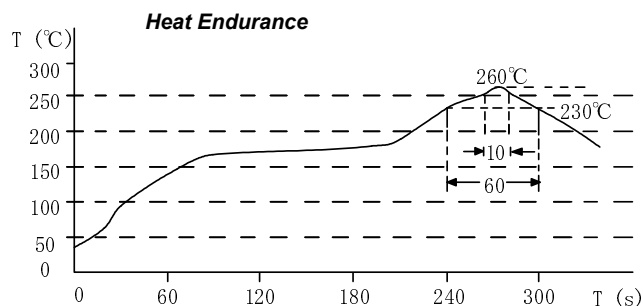

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
info@comp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com