

PIN Power Inductor RCR1616



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 16.5 × 16.5 × 16.5mm Max.
- Product weight: 10 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -30°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+85°C


Packaging

- Box packaging.


Applications

- Ideally used in Printers, LCD TV, DVD, Copy Machine, Mainboard of the compounding machines etc. as DC-DC Converter inductors.

Dimension - [mm]

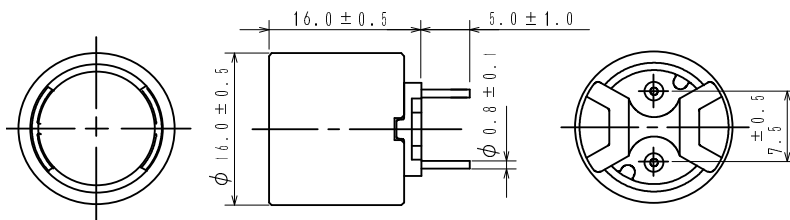

Schematics - [mm]



PIN Power Inductor

RCR1616



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (m Ω) [Max.] (Typ.) (at 20°C)	Saturation- current (A) ※2	Temperature Rise current (A) ※3
RCR1616NP-4R7M RCR1616NP-6R8M RCR1616NP-100M	4R7M 6R8M 100M	4.7 μ H $\pm$ 20% 6.8 μ H $\pm$ 20% 10 μ H $\pm$ 20%	6.70(5.15) 9.35(7.20) 10.5(8.25)	12.6 9.8 9.3	9.2 8.0 7.8
RCR1616NP-120M RCR1616NP-150M RCR1616NP-180M	120M 150M 180M	12 μ H $\pm$ 20% 15 μ H $\pm$ 20% 18 μ H $\pm$ 20%	11.0(8.47) 14.5(11.2) 16.5(12.7)	8.5 7.1 6.7	7.4 6.2 6.0
RCR1616NP-220M RCR1616NP-270M RCR1616NP-330M	220M 270M 330M	22 μ H $\pm$ 20% 27 μ H $\pm$ 20% 33 μ H $\pm$ 20%	17.0(13.0) 20.0(15.2) 27.0(20.5)	6.2 5.6 5.0	5.7 5.2 4.8
RCR1616NP-390M RCR1616NP-470M RCR1616NP-560M	390M 470M 560M	39 μ H $\pm$ 20% 47 μ H $\pm$ 20% 56 μ H $\pm$ 20%	33.0(25.4) 37.0(28.4) 45.0(34.5)	4.6 4.2 3.8	4.5 4.1 3.8
RCR1616NP-680M RCR1616NP-820M RCR1616NP-101K	680M 820M 101K	68 μ H $\pm$ 20% 82 μ H $\pm$ 20% 100 μ H $\pm$ 10%	56.0(43.0) 64.5(49.5) 68.0(52.5)	3.3 2.9 2.7	3.4 3.1 2.9
RCR1616NP-121K RCR1616NP-151K RCR1616NP-181K	121K 151K 181K	120 μ H $\pm$ 10% 150 μ H $\pm$ 10% 180 μ H $\pm$ 10%	80.0(61.7) 91.0(70.0) 135(104)	2.5 2.3 2.0	2.6 2.4 2.0
RCR1616NP-221K RCR1616NP-271K RCR1616NP-331K	221K 271K 331K	220 μ H $\pm$ 10% 270 μ H $\pm$ 10% 330 μ H $\pm$ 10%	155(119) 180(140) 240(183)	1.8 1.7 1.5	1.8 1.7 1.4
RCR1616NP-391K RCR1616NP-471K RCR1616NP-561K	391K 471K 561K	390 μ H $\pm$ 10% 470 μ H $\pm$ 10% 560 μ H $\pm$ 10%	255(196) 280(215) 380(291)	1.3 1.2 1.1	1.3 1.3 1.1
RCR1616NP-681K RCR1616NP-821K RCR1616NP-102K	681K 821K 102K	680 μ H $\pm$ 10% 820 μ H $\pm$ 10% 1.0mH $\pm$ 10%	515(397) 575(443) 665(513)	1.0 0.96 0.85	1.0 0.99 0.93

※1. Inductance measuring condition: at 1kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 90% of it's nominal value.













※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

PIN Power Inductor RCR1616



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

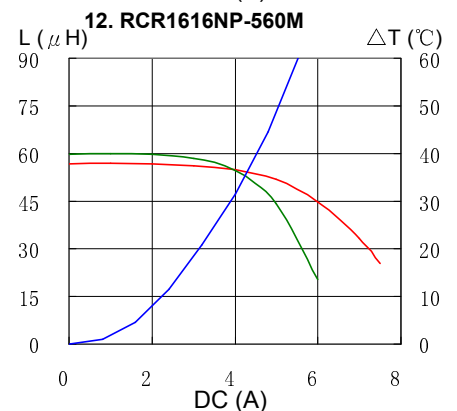
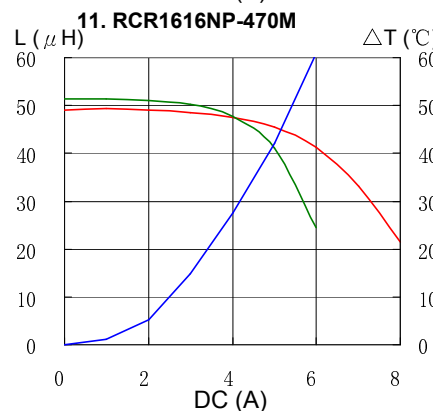
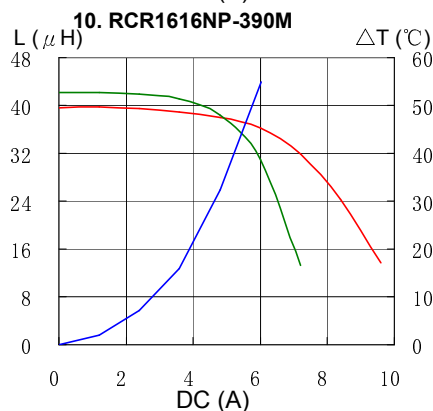
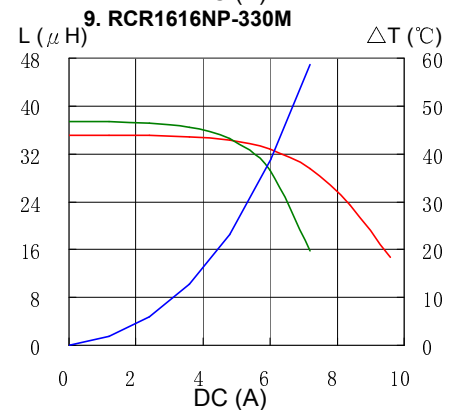
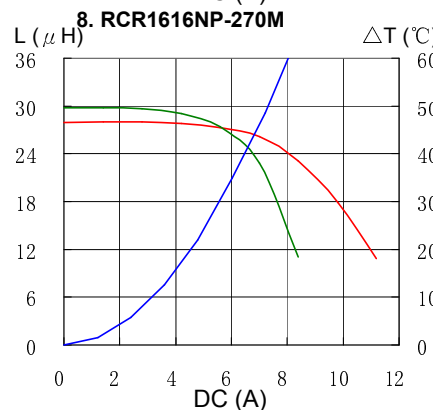
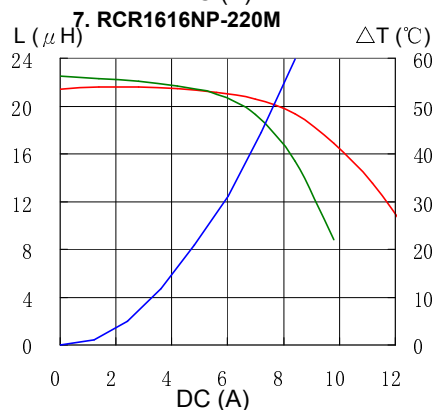
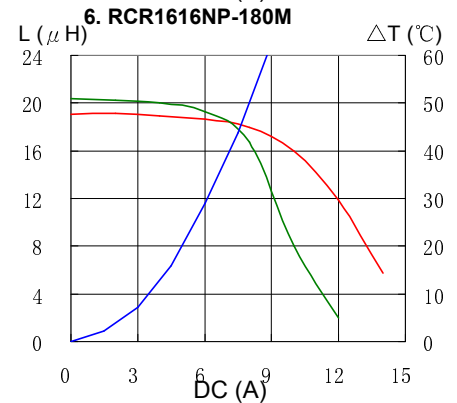
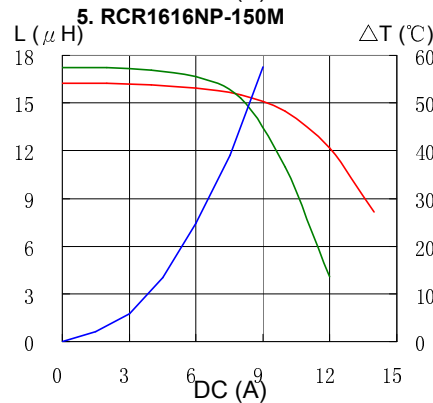
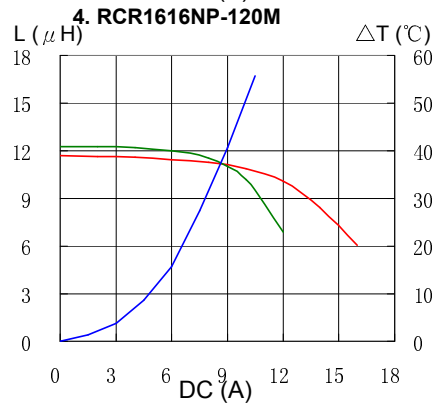
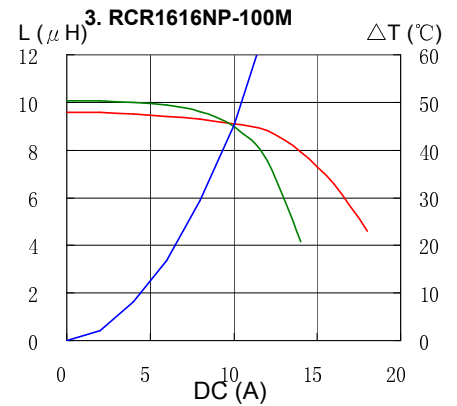
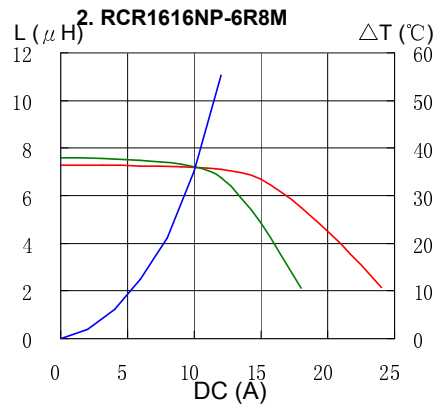
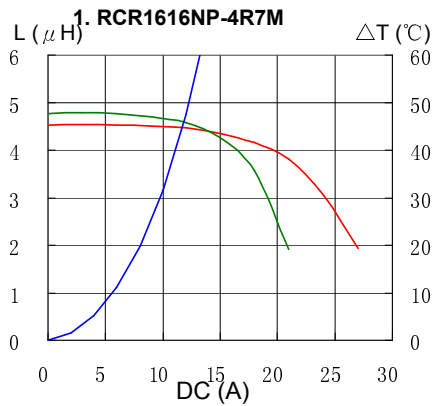


PIN Power Inductor RCR1616



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

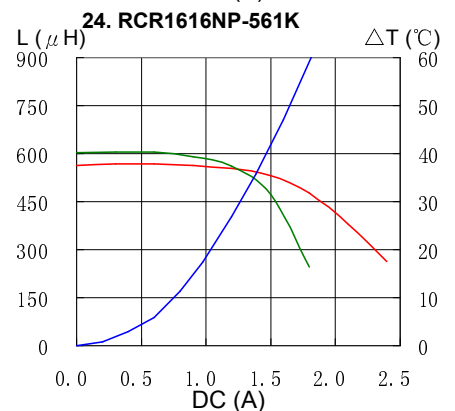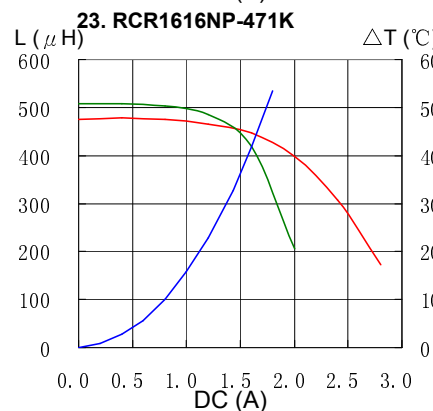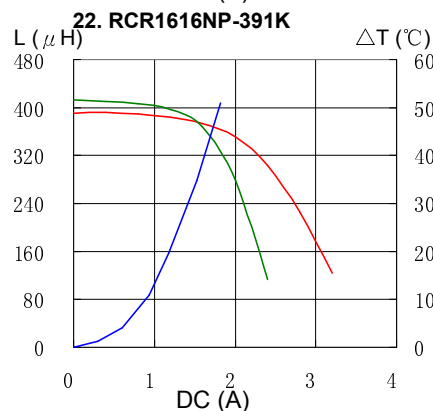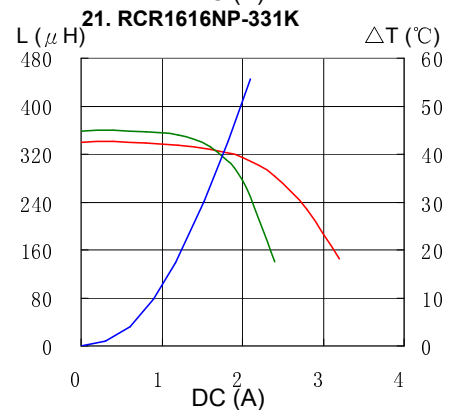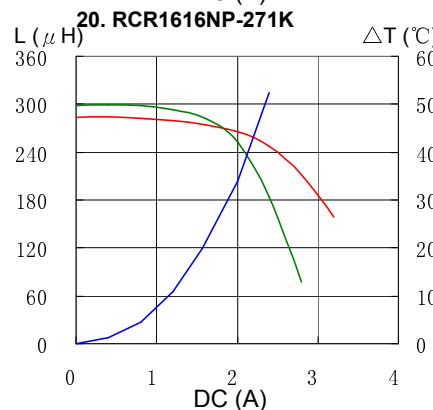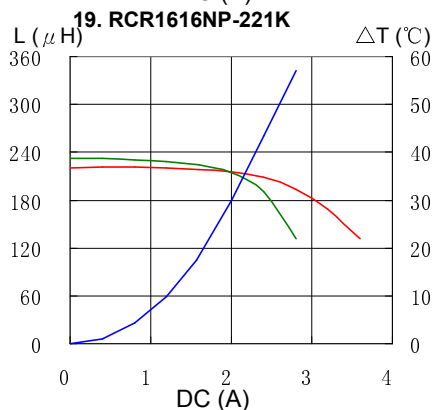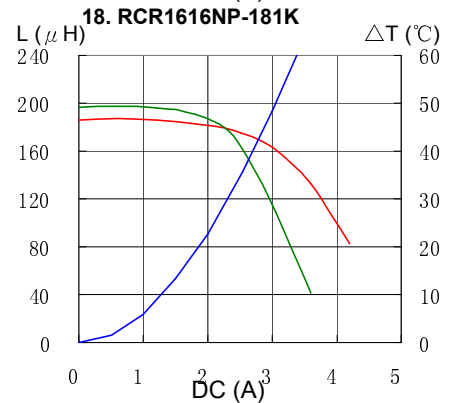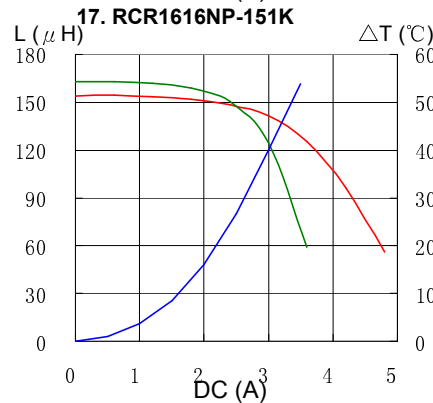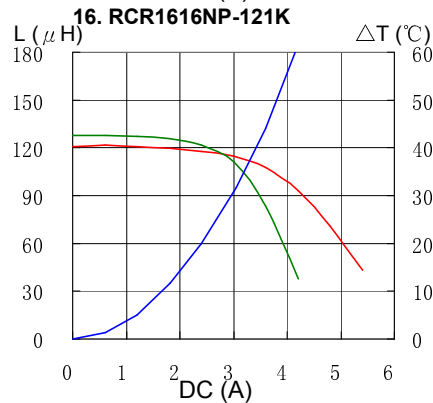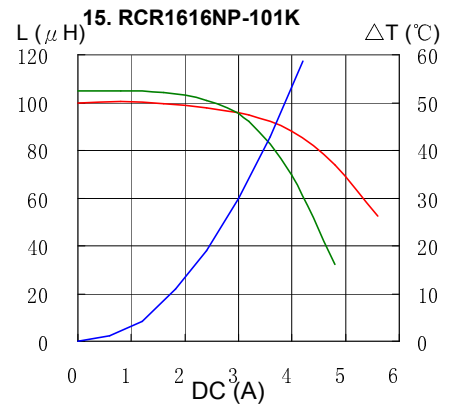
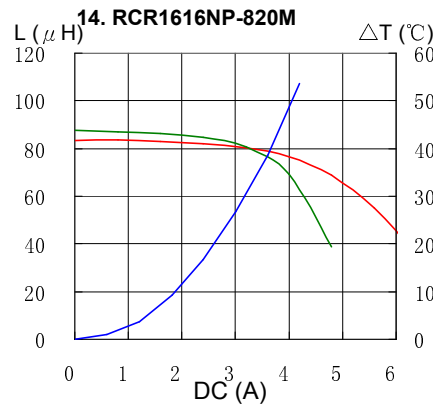
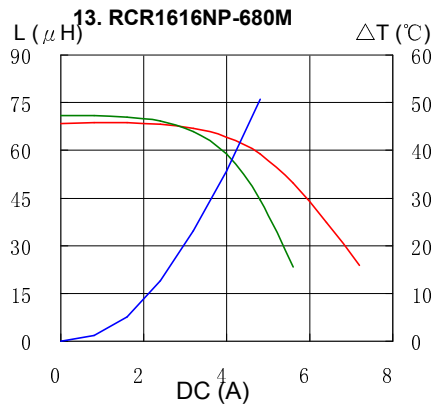


PIN Power Inductor RCR1616



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

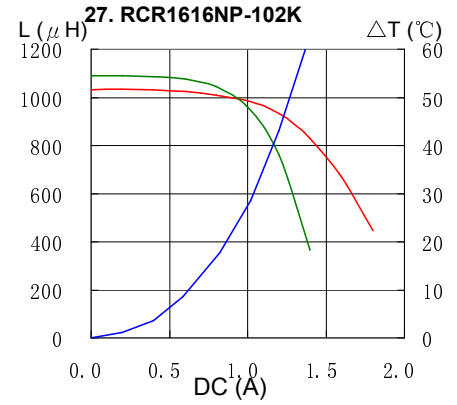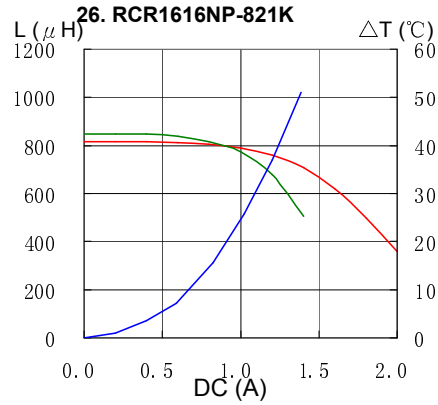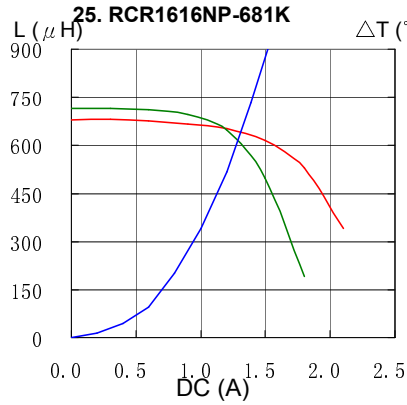

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com