

SMD Power Inductor CDEPI99



Description

- Ferrite core construction.
- Magnetically unshielded.
- L × W × H: 10.5 × 9.5 × 10.0 mm Max.
- Product weight: 3.3g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 250pcs per reel


Applications

- Ideally used in D Class Amplifiers.

Dimension - [mm]

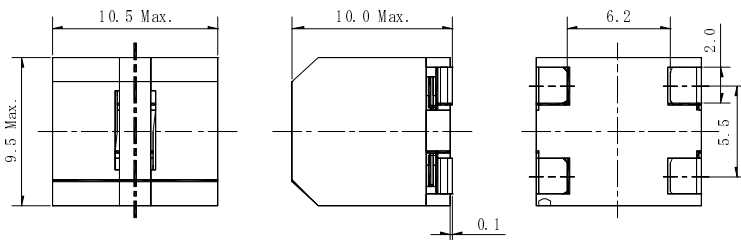

Land pattern and Schematics - [mm]

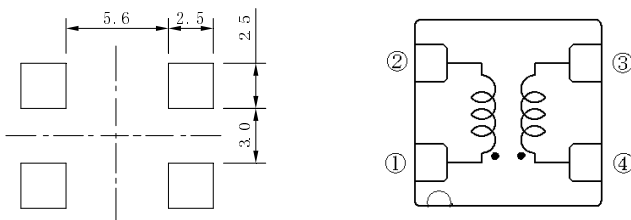

Electrical Characteristics

Part No.	Stamp	Inductance (μH) [Within] ※1	D.C.R. (mΩ) [Max.] (Typ.)	DC Saturation current (A) ※2	Temperature rise current (A) ※3
CDEPI99NP-5R0PC	5R0	5 μH ±25%	13(10)	7.16(8.95)	7.1(8.1)
CDEPI99NP-100MC	100	10 μH ±20%	26(21)	5.24(6.55)	4.2(4.8)
CDEPI99NP-120MC	120	12 μH ±20%	29(23)	4.68(5.85)	4.1(4.7)
CDEPI99NP-150MC	150	15 μH ±20%	29(23)	3.92(4.90)	4.1(4.7)
CDEPI99NP-180MC	180	18 μH ±20%	29(23)	3.31(4.14)	4.1(4.7)
CDEPI99NP-220MC	220	22 μH ±20%	29(23)	2.82(3.52)	4.1(4.7)

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 75% of its nominal value.







※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor CDEPI99





Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

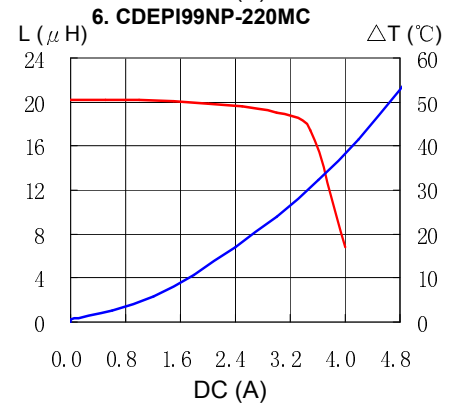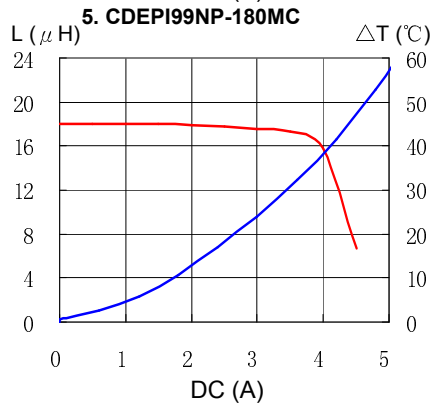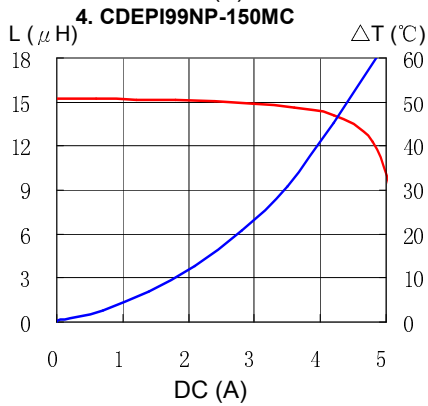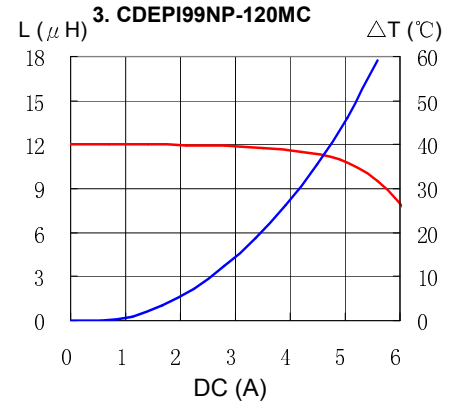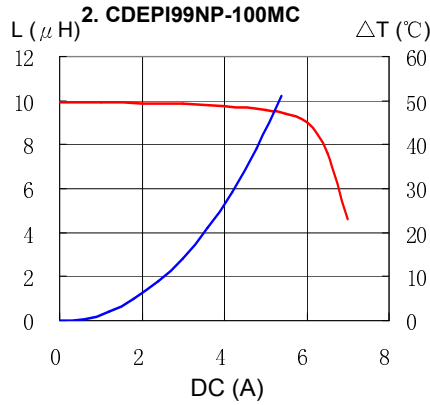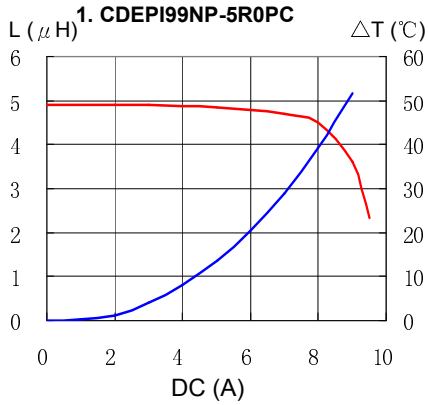

Solder Reflow Condition

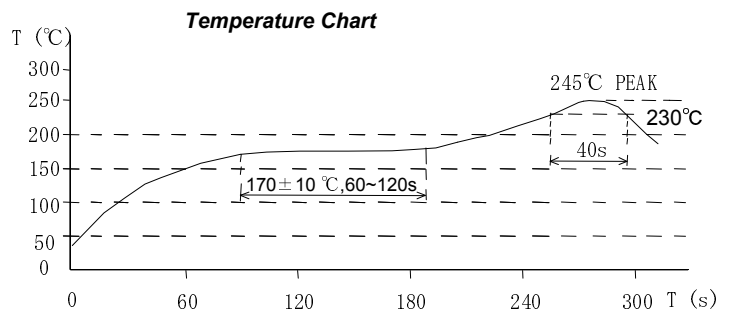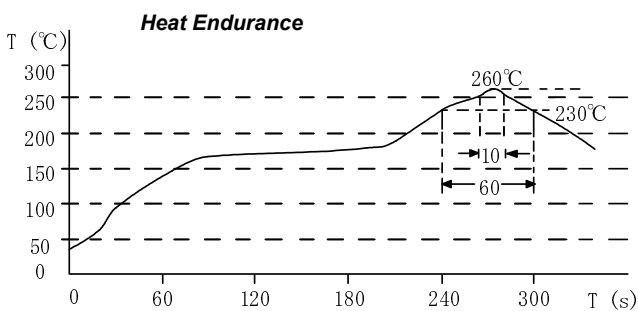

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6688
FAX.+852-2565-9600
sales@hk.sumida.com

Tokyo
Tel.+81-3-5202-7112
FAX.+81-3-5202-7105
sales@jp.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-021-5836-3299
FAX.+86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6296-3390
sales@sg.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com