

Type: CMS65

◆ Product Description


- $6.2 \times 6.2\text{mm}$ Max.(L×W), 6.1mm Max. Height.
- Max. Operating frequency 500kHz;
Max Operating Power 1.5W (500kHz), 0.91W(300kHz), 0.30W(100kHz)
- Custom design is available.




◆ Feature

- Magnetically shielded construction.
- Ideally used in Bias OSC for Tape Recorder, can be also used as power chokes, Hybrid-IC inductors.
- RoHS Compliance.

◆ Dimensions (mm)

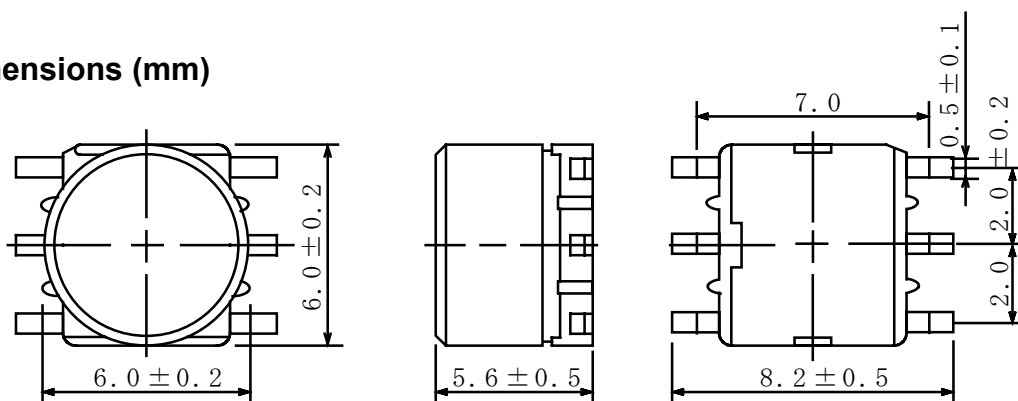


◆ Schematics (Bottom)



“S” is winding start.

◆ Land Pattern (mm)

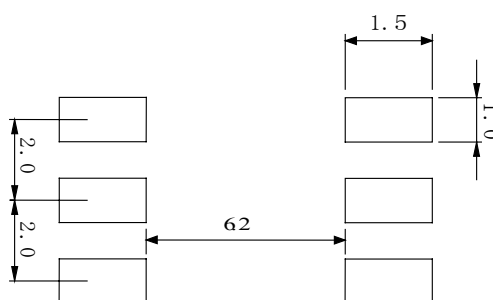

◆ Specification

Sample No.	Inductance (3-4) 1kHz/1V	D.C.R. (3-4)
6324-T061	$76\mu\text{H} \pm 30\%$	0.59Ω Max