

Type: LC-10

◆ **Product Description**


- ϕ 11.0mm Max.(L×W), 5.0mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.




◆ **Feature**

- Magnetically shielded construction.
- Max. Operating frequency 500kHz,
Max. Operating Power 1.8W (500kHz), 1.1W(300kHz), 0.36W(100kHz).
- Ideally used in Portable equipment, Drive for fluorescent display tube.
- RoHS Compliance

◆ **Dimensions (mm)**

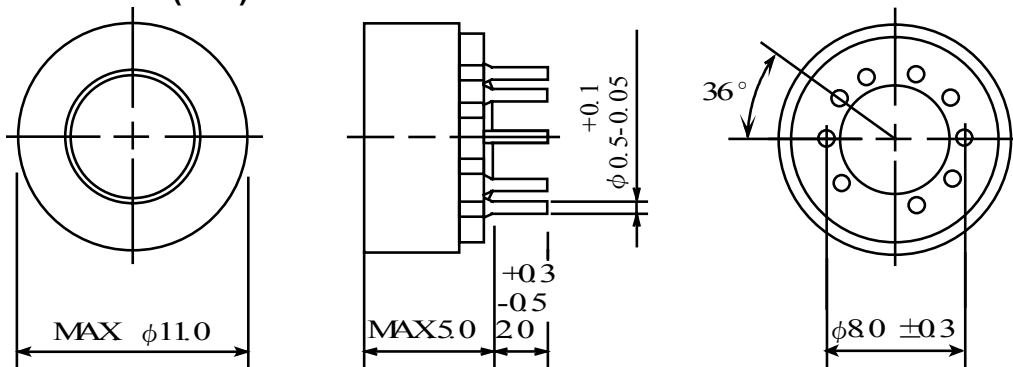

◆ **Schematics (Bottom)**

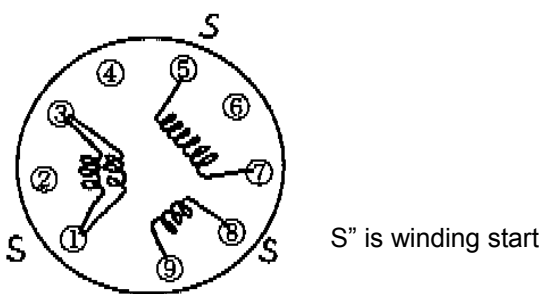

◆ **Specification**

Sample No.	Inductance (5-7) 1kHz/1V	D.C.R. (1-3)
0375 - T041	2.4mH \pm 30%	0.78 Ω Max.