

**Type: LC-14**

◆ **Product Description**


- $\phi$  14.5mm Max.(L×W), 6.6mm Max. Height
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements




◆ **Feature**

- Magnetically shielded construction.
- Max. Operating frequency 300kHz, Max. Operating Power 3.8W(300kHz), 1.3W(100kHz).
- Ideally used in Portable equipment, Drive for fluorescent display tube.
- RoHS Compliance

◆ **Dimensions (mm)**

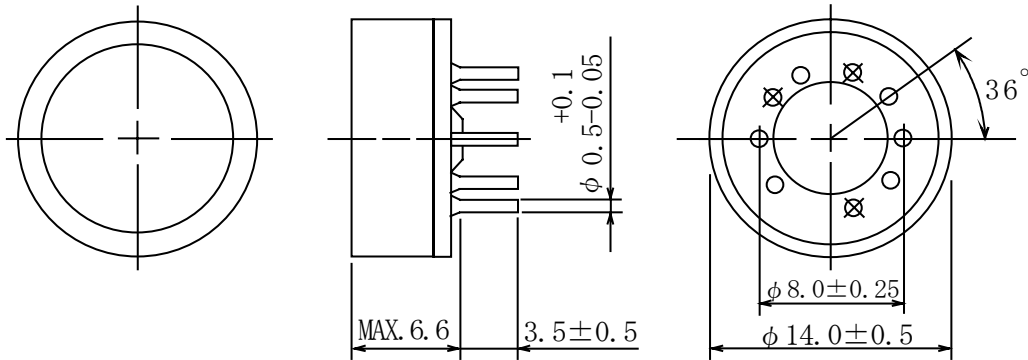

◆ **Schematics (Bottom)**



“S” is winding start

◆ **Specification**

Sample No.	Inductance (7-9) 1kHz/1V	D.C.R. (1-3)
0376 - T056	1.1mH ± 30% within	0.88 Ω Max.