## Type: CAS14D26

### **♦** Product Description


- 15.0 $\times$ 4.8mm Max.(L $\times$ W),3.0mm Max. Height.
- Operating temperature:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ .




#### **♦** Feature


- · LF transponder receiver antenna.
- · Ideally used in keyless smart entry system.
- · RoHS Compliance.

## **♦** Dimensions (mm)

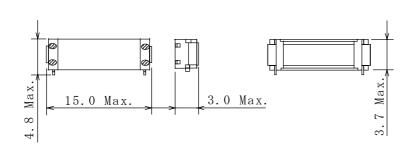




### ◆ Land Pattern (mm)



### ◆ Schematics(Bottom)



"S" is winding start.

# **♦** Specification

	(2-1)	Measuring conditions
Inductance	2.38 m H ± 5% Within	125kHz,1V
Unloaded Q	MIN. 30	125kHz,1V
D.C.R.	27 Ω (Ref.)	at 25℃