

Descriptions

- Three Terminal Positive Low Dropout Voltage Regulator

Features


- Low Standby Current Consumption (500 μ A Typ.)
- Maximum Output Current (150 mA Max.)
- Low Dropout Voltage (0.7V Max.)

Ordering Information

Type NO.	Marking	Package Code
S78DL05F	85□□	SOT-89

□□: Monthly Code, Weekly Code

Outline Dimensions (unit : mm)

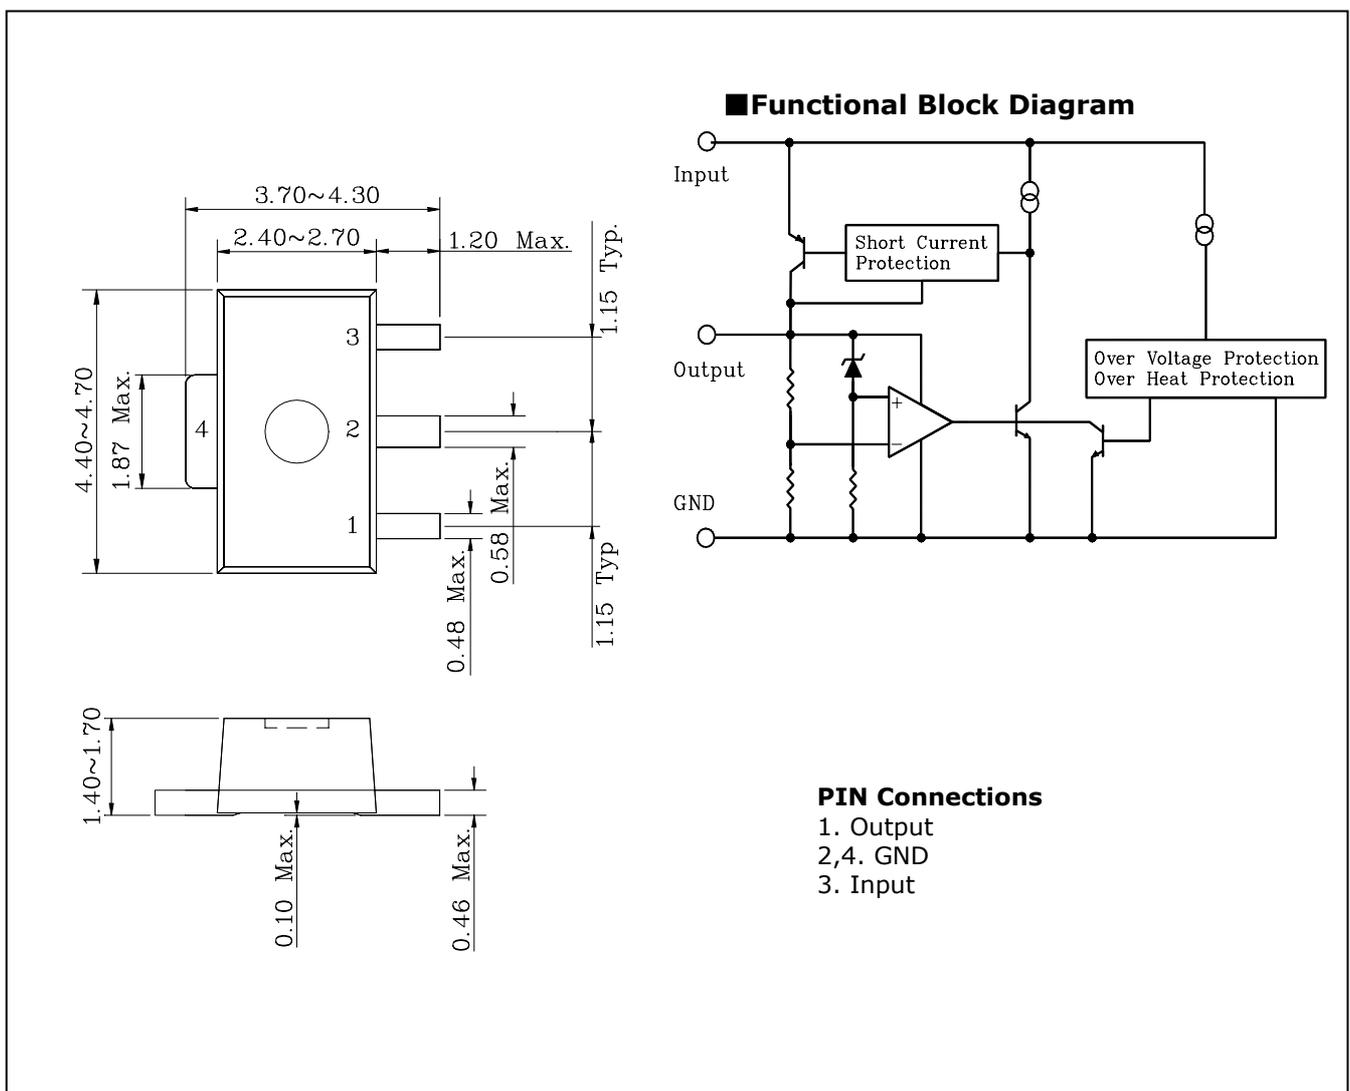

Maximum ratings

T_a=25°C


Characteristic	Symbol	Rating	Unit
Input voltage	V _{IN}	18	V
Power Dissipation	P _D	500	mW
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55~150	°C

Electrical Characteristics

(※ V_{IN}=10V, I_{OUT}=10 mA, T_a=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output voltage	V _{OUT}	V _{IN} =6V~13V	4.8	5	5.2	V
Voltage Regulation	Δ V _{OUT} (1)	V _{IN} =6V~13V	-	10	30	mV
Load Regulation	Δ V _{OUT} (2)	I _{OUT} =10~100mA	-	12	50	mV
Quiescent Current	I _{QC}	I _{OUT} ≤ 10mA, V _{IN} =6V~13V	-	0.5	1	mA
Dropout Voltage	V _{DROP}	I _{OUT} =50mA	-	0.3	0.5	V
		I _{OUT} =100mA	-	0.5	0.7	

Test circuit

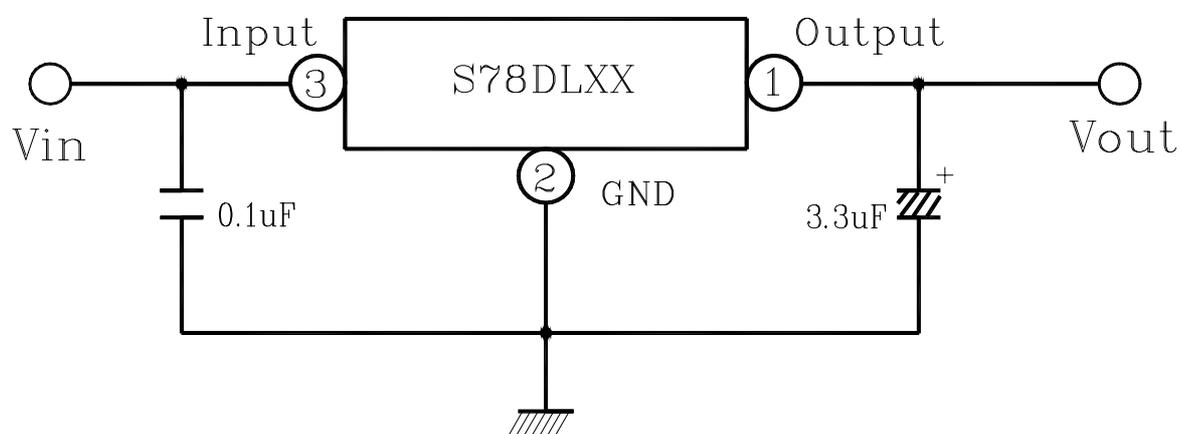

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.