


400V, 0.8A Sensitive Gate SCRs

Features

- Repetitive Peak Off-State Voltage : 400V
- R.M.S On-State Current : $I_{T(RMS)}=0.8A$
- Low On-state Voltage : $V_{TM}=1.2V(Typ.)$

General Description

PNPN devices designed for high volume, line-powered consumer applications such as relay and lamp drivers, small motor controls, gate drivers for larger thyristors, and sensing and detection circuits. Supplied in an inexpensive plastic TO-92 package which is readily adaptable for use in automatic insertion equipment.

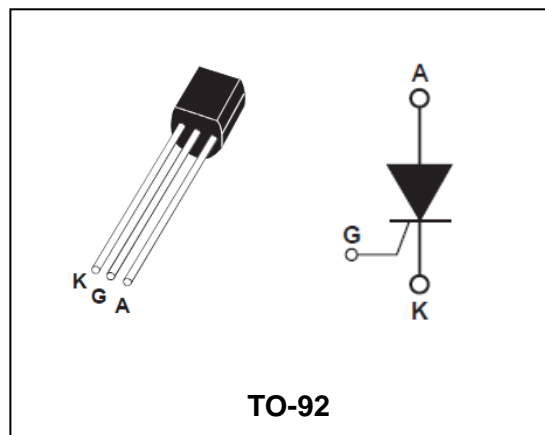


Product Characteristics

$I_{T(RMS)}$	0.8A
V_{DRM}	400V
V_{TM}	1.2V

Ordering Information

Device	Marking Code	Package	Packaging
SCR0840	SCR0840	TO-92	Ammo Tape

Marking Information

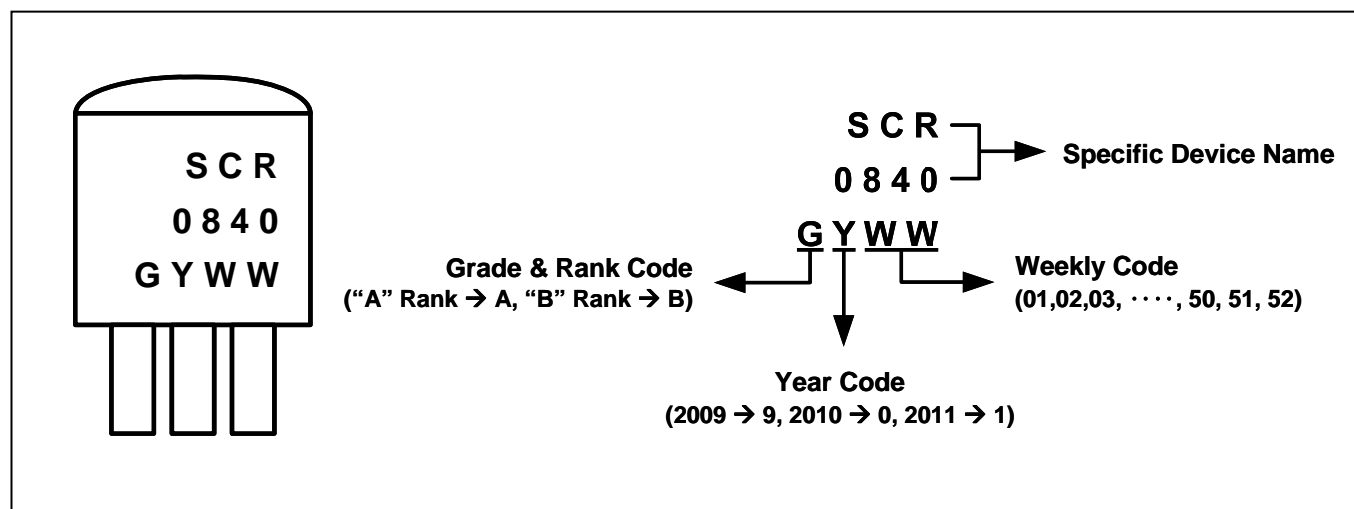

Absolute Maximum Ratings (T_j=25°C unless otherwise specified)

Symbol	Parameter	Ratings	Unit
V _{DRM}	Repetitive Peak Off-State Voltage	400	V
I _{T(RMS)}	R.M.S On-State Current (180° conduction angles)	0.8	A
I _{T(AV)}	Average On-State Current (Half Sine Wave : T _C =74°C)	0.5	A
I _{TSM}	Surge On-State Current (1/2 Cycle, 60Hz, Peak, Non Repetitive)	10	A
I ² t	Circuit Fusing Considerations (t=8.3mS)	0.415	A ² s
P _{GM}	Forward Peak Gate Power Dissipation (Ta=25°C)	0.1	W
P _{G(AV)}	Forward Average Gate Power Dissipation (Ta=25°C, t=8.3mS)	0.10	W
V _{RGM}	Reverse Peak Gate Voltage	5	V
I _{FGM}	Forward Peak Gate Current	1	A
T _{STG}	Storage Temperature Range	-40~125	°C
T _j	Operating Junction Temperature	-40~125	°C

Thermal Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
R _{th(J-C)}	Thermal Resistance	Junction to Case	-	-	1.3	°C/W
R _{th(J-A)}	Thermal Resistance	Junction to Ambient	-	60	-	°C/W

*R_{th(J-A)} : t= 10sec

Electrical Characteristics (Ta=25°C)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{GT}	Gate Trigger Current ⁽¹⁾	V _{AK} =7V, R _L =100Ω	-	-	200	μA
			15	-	30	
V _{GT}	Gate Trigger Voltage ⁽¹⁾	V _{AK} =7V, R _L =100Ω, Ta=25°C V _{AK} =7V, R _L =100Ω, Ta=-40°C	-	-	0.8 1.2	V V
V _{GD}	Non Trigger Gate Voltage	V _{AK} =12V, R _L =100Ω, Ta=125°C	0.2	-	-	V
I _H	Holding Current	V _{AK} =12V, Gate open, Initiating current=50mA Ta=25°C Ta=-40°C	-	2	5 10	mA mA
I _{DRM}	Repetitive Peak Off-Stage Current	V _{AK} =V _{DRM} or V _{RRM} , T _C =25°C V _{AK} =V _{DRM} or V _{RRM} , T _C =125°C	-	-	10 200	μA μA
V _{TM}	Peak On-Stage Voltage ⁽²⁾	I _{TM} =1A, Peak	-	1.2	1.7	V

(1) R_{GK} Current is not included in measurement

(2) Forward current applied for 1ms maximum duration, duty cycle ≤1%

Electrical Characteristic Curves

Fig. 1 I_{GT} - Junction Temperature

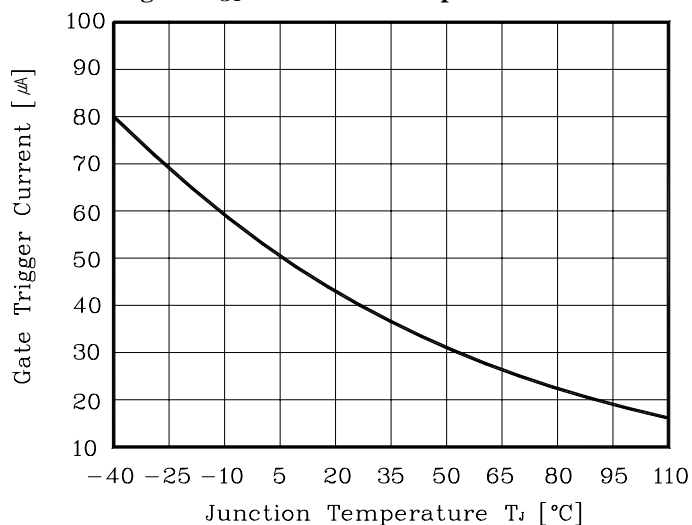


Fig. 2 V_{GT} - Junction Temperature

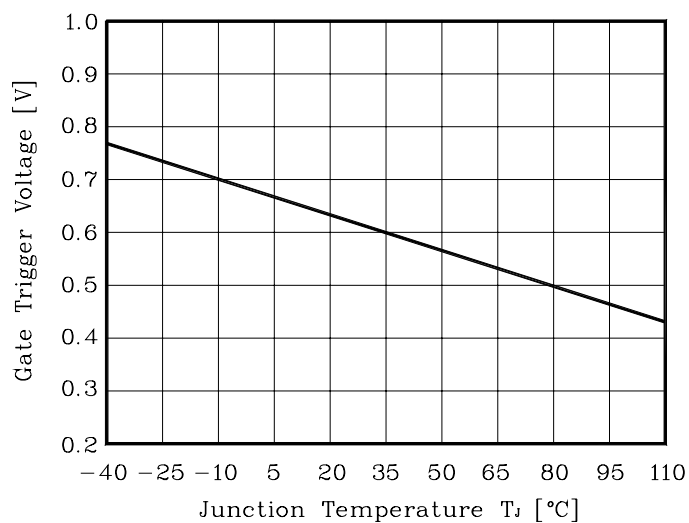


Fig. 3 I_H - Junction Temperature

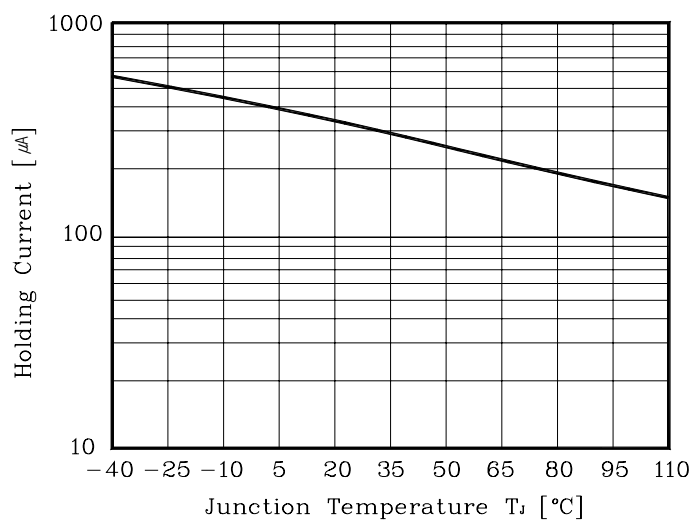


Fig. 4 I_L - Junction Temperature

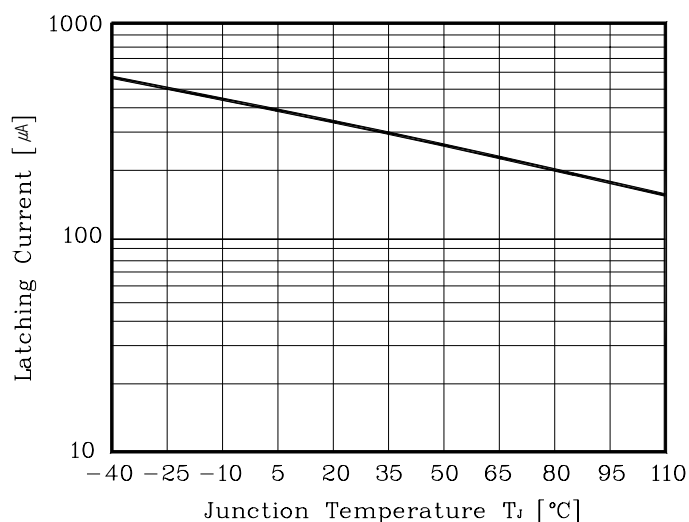


Fig. 5 Current Derating [Ref. : Case Temp.]



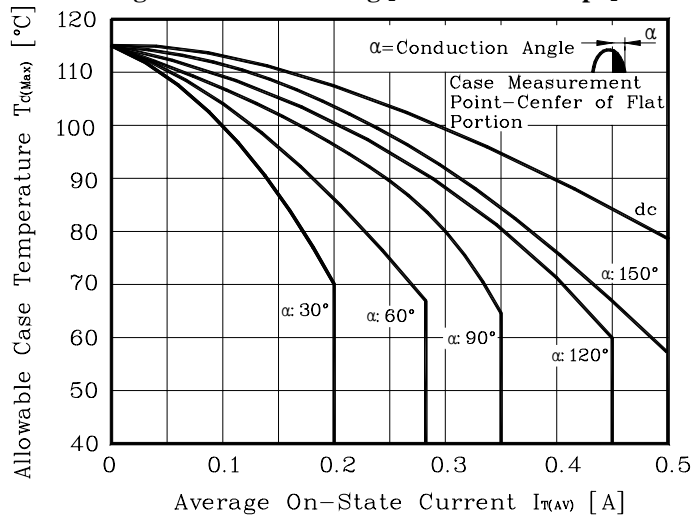


Fig. 6 Current Derating [Ref. : Ambient Temp]

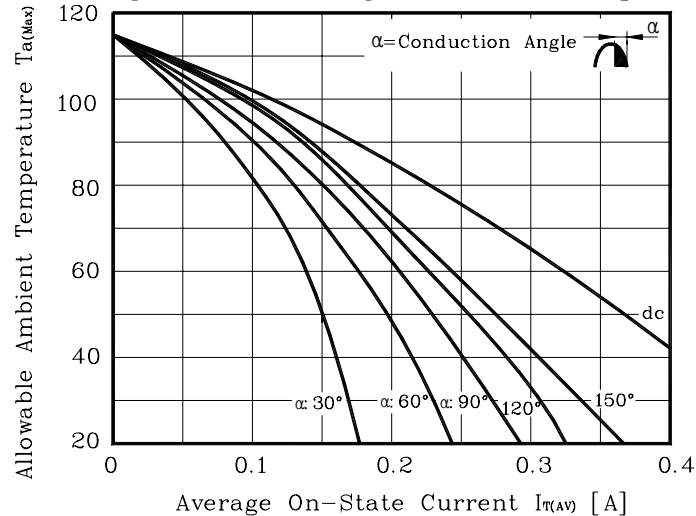

Package Outline Dimension

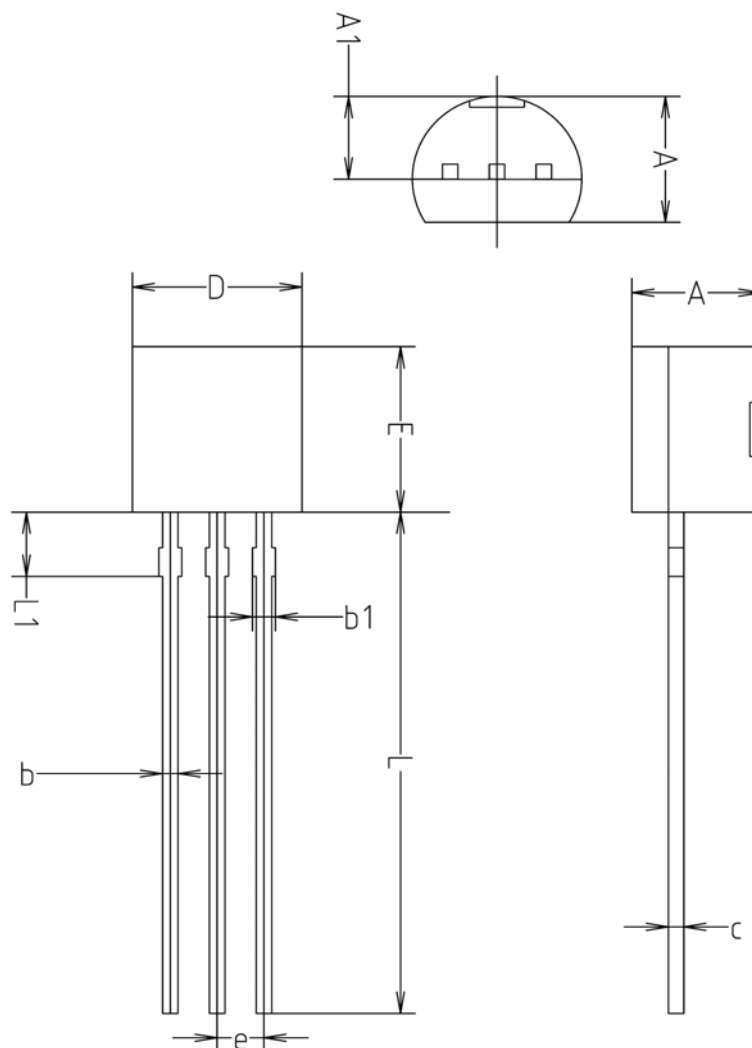

SYMBOL	MILLIMETERS(mm)		
	MINIMUM	NOMINAL	MAXIMUM
A	3.40	3.50	3.66
A1	2.46	2.51	2.59
b	0.39	0.44	0.53
b1	0.39	—	0.63
c	0.35	0.42	0.47
D	4.48	4.60	4.70
E	4.48	4.60	4.70
e	1.17	1.27	1.37
L	13.70	14.00	14.77
L1	1.55	1.70	2.15

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.