


NANO830

Intel® Atom™ D2550 Nano-ITX SBC with Intel® NM10 Chipset, LVDS/DisplayPort/VGA, Dual LANs and Audio

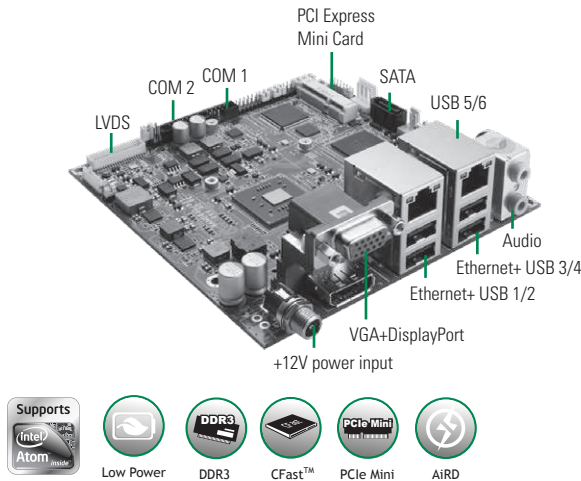

System

CPU	Intel® Atom™ processor D2550 1.86 GHz dual core onboard
System Memory	1 x 204-pin SO-DIMM supports DDR3-1066 max. up to 4 GB
Chipset	Intel® NM10
BIOS	AMI BIOS
SSD	1 x CFAST™
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI Express Mini Card V1.2
Battery	Lithium 3V/220mAH
Power Input	DC power jack connector +12V DC-in only AT Auto Power ON function supported
Power Requirement	Intel® Atom™ D2550 @1.86 GHz, 1GB DDR3 Max. RMS: +12V @ 1.25A
Size	120 x 120 mm
Board Thickness	1.6 mm
Operating Temperature	-20° ~ +70°C (-4°F ~ +158°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O


MIO	1 x RS-232/422/485 (COM 1); with +5V/+12V powered 1 x RS-232 (COM 2) ; with +5V/+12V powered
SATA	1 x SATA-300
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	2 ports as 10/100/1000 Mbps support Wake-on-LAN, RPL/PXE Boot ROM with Intel® 82583V
Audio	HD Codec audio as MIC-in/Line-out with Realtek ALC662
USB	6 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels IN/OUT programmable
TPM	Infineon SLB9635 with TPM 1.2 compliant

Display


Chipset	Intel® GMA 3650 graphics core
Memory Size	Share system memory
Display Interface	1 x VGA 1 x DisplayPort 1 x LVDS; 18/24-bit single/dual channel

Features



- Intel® Atom™ processor D2550 (1.86 GHz)
- Intel® NM10 chipset
- 1 DDR3 SO-DIMM supports up to 4 GB memory capacity
- 6 USB 2.0 ports
- 2 COM ports
- Supports CFAST™



▲ Top view



▲ Rear view



▲ Internal power connector (Optional)

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Cable

Part Number	Description	Qty
59382620000E	1 x COM cable w/ bracket P=2.0 mm, L=300mm	1

Optional

59382631000E	2 x USB 2.0 wafer cable w/ bracket 180mm
59070213000E	DisplayPort to VGA cable, L=100mm
59040131000E	DisplayPort to DVI cable, L=220mm
59050203000E	DisplayPort to HDMI cable, L=200mm
59091501000E	DisplayPort to DisplayPort cable, L=1500mm

Ordering Information

Standard

NANO830VPGGA-D2550 (heatsink fan included)	Nano-ITX SBC with Intel Atom processor D2550 1.86 GHz, VGA/DisplayPort/LVDS, 2 10/100/1000Mbps Ethernet 2 COM, 6 USB, CFAST and audio
--	--

SBC
Services
and Solutions

Systems
on
Modules

Embedded
SBCs
>EPIC

Embedded
SBCs
>3.5" Capa

Embedded
SBCs
>Nano-ITX

Embedded
SBCs
>Pico-ITX

Embedded
SBCs
>PC/104

Industrial
Mother-
boards

Slot
CPU
Cards

Accessories

Appendix