


CAPA831

Intel® Atom™ D2550/ N2600/ N2800 3.5"
Embedded SBC with Intel® NM10 Chipset,
LVDS/DisplayPort/VGA, Dual LANs and
Audio

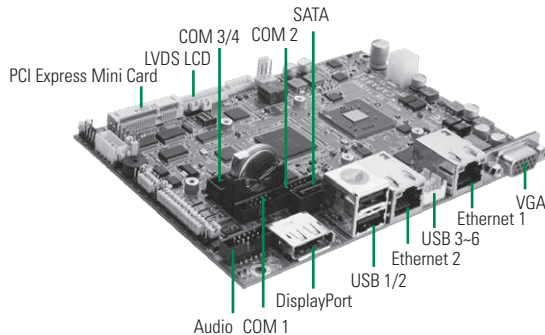

System

CPU	Intel® Atom™ processor D2550 1.86 GHz, N2800 1.86 GHz, N2600 1.6 GHz dual core onboard
System Memory	1 x 204-pin SO-DIMM supports DDR3-800/1066 max. up to 4 GB (N2600 supports DDR3 800 max. up to 2 GB)
Chipset	Intel® NM10
BIOS	AMI
SSD	1 x CFAST™
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI Express Mini Card V1.2
Battery	Lithium 3V/220mAh
Power Input	2 x 2-pin connector +12V DC-in only AT Auto Power ON function supported
Power Requirement	Intel® Atom™ D2550 @ 1.86 GHz, 1GB DDR3 Max RMS: +12V @ 1.48A
Size	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	0° ~ +60°C (32°F ~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O


MIO	2 x RS-232/422/485 (COM 1~2); with +5V/+12V powered 2 x RS-232 (COM 3~4); with +5V/+12V powered
SATA	1 x SATA-300
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	2 ports as 10/100/1000 Mbps support Wake-on-LAN, RPL/PXE Boot ROM with Intel® 82583V
Audio	HD Codec audio as MIC-in/Line-in/Line-out/speaker-out with Realtek ALC662
USB	6 x USB 2.0
SMBus	System Management Bus for Advanced monitoring/control
Digital I/O	8 channels IN/OUT programmable
TPM	Infineon SLB9635 with TPM 1.2 compliant

Display


Chipset	Intel® GMA 3650 graphics core for D2550/ N2800 Intel® GMA 3600 graphics core for N2600
Memory Size	Share system memory
Display Interface	1 x VGA 1 x DisplayPort 1 x LVDS; 18/24-bit single/dual channel

Features

- Intel® Atom™ processor D2550 (1.86 GHz)/ N2800 (1.86 GHz)/ N2600 (1.6 GHz)
- Intel® NM10 chipset
- 1 DDR3 SO-DIMM supports up to 4 GB memory capacity
- 6 USB 2.0 ports
- 4 COM ports



▲ Top view



▲ Rear view

DDR3 SO-DIMM

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Cable

Part Number	Description	Qty
59382620000E	1 x COM w/ bracket P=2.0mm, L=300mm	1
59384500100E	Audio cable w/ bracket P=2,450mm	1
59382631000E	2 x USB 2.0 wafer cable w/ bracket 180mm	1

Optional

59380000300E	2 x COM w/ bracket P=1.27 x 2.54 L=300mm
59070213000E	DisplayPort to VGA cable, L=100mm
59040131000E	DisplayPort to DVI cable, L=220mm
59050203000E	DisplayPort to HDMI cable, L=200mm
59091501000E	DisplayPort to DisplayPort cable, L=1500mm

Ordering Information

Standard

CAPA831VPGGA-D2550 (P/N: E38E831106)	3.5" SBC with Intel® Atom™ D2550 1.86 GHz, VGA/ DisplayPort/ LVDS, 2 10/100/1000 Ethernet and audio
CAPA831VPGGA-N2800 (fanless) (P/N: E38E831103)	3.5" SBC with Intel® Atom™ N2800 1.86 GHz, VGA/ DisplayPort/ LVDS, 2 10/100/1000 Ethernet and audio
CAPA831VPGGA-N2600 (fanless) (P/N: E38E831105)	3.5" SBC with Intel® Atom™ N2600 1.6 GHz, VGA/ DisplayPort/ LVDS, 2 10/100/1000 Ethernet and audio