

eBOX620-110-FL

Fanless Embedded System with AMD
G-Series APU and Dual Display Support



▲ Front view



EN60950

IP40

Fanless

DualView

DDR3

CFast™

AiRD

Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	AMD G-Series APU T40E 1.0 GHz or T56N 1.65 GHz
System Memory	1 x 204-pin DDR3-1066/1333 SO-DIMM max. up to 4 GB
Chipset	AMD A50M FCH
BIOS	AMI
System I/O Outlet	1 x RS-232/422/485 (COM 1) 3 x RS-232 (COM 2/ 3/ 4) 1 x VGA 1 x DisplayPort 1 x Audio (Mic-in/Line-out) 2 x 10/100/1000Mbps Ethernet 6 x USB 2.0 1 x SMA type connector opening for antenna 1 x VDC power input connector 1 x ATX power switch
Watchdog Timer	255 levels, 1~255 sec.
Storage	1 x 2.5" SATA HDD drive bay 1 x CompactFlash™
Expansion Interface	1 x PCI Express Mini Card (USB+PCI Express signal) 1 x SIM slot
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	Screw type AC 60W adapter Input: AC 90~264V Output: DC12V@5A
Operating Temperature	-10°C ~ +45°C (14°F ~ 113°F) (with W.T. HDD)
Storage Temperature	-20°C ~ +80°C (-4°F ~ +176°F)
Humidity	10%~90% , non-condensing
Vibration Endurance	2 Grms w/ CompactFlash™ (5-500Hz, X, Y, Z directions)
Dimensions	145mm(W) x 132mm(D) x 50mm(H)
Weight (net/gross)	1.98 kg (4.36 lb) / 2.6 kg (5.73 lb)
Certification	CE, EN60950 compliance
EOS Support	XPE, Linux

* XPE: Windows® XP Embedded

Packing List

1 x quick manual
1 x driver CD
1 x screw pack
4 x foot pad
1 x power adapter
2 x CFast mylar
1 x HDD Mylar
1 x US power cord

Features

- AMD G-Series APU single core T40R 1.0 GHz or dual core T56N 1.65 GHz onboard
- AMD A50M FCH
- High performance DDR3-1066/1333 SO-DIMM max. up to 4 GB
- 1 DisplayPort and 1 VGA port
- 1 RS-232/422/485 and 3 RS-232 ports
- Fanless operation design with full feature I/O
- 1 2.5" SATA drive bay and one CompactFlash™ 2.0 slot
- 1 internal PCI Express Mini Card slot

Front access CF slot



▲ Rear view

Power Protection

AC Version

OVP (over voltage protection)
OCP (over current protection)
SCP (short circuit protection)

Ordering Information

Standard


eBOX620-110-FL-T56N-	Fanless embedded system with AMD dual core T56N 1.65 GHz, VGA, DisplayPort, 2 10/100/1000Mbps, 4 COM, 6 USB, AC-DC 60W adapter, CF & HDD support
eBOX620-110-FL-T40R-	Fanless embedded system with AMD single core T40R 1.0 GHz, VGA, DisplayPort, 2 10/100/1000Mbps, 4 COM, 6 USB, AC-DC 60W adapter, CF & HDD support

Optional

2.5" SATA HDD	40 GB or above
2.5" SATA SSD	4 GB or above
DDR3 SODIMM	Max. up to 2 GB
CompactFlash™	1 GB or above
Wifi+Bluetooth	
GPS module	
Graphic accelerator	
codec module	
Din rail kit	
Wall mount kit	
VESA mount kit	
Power cord	

*Specifications and certifications are based on options and may vary.

Dimensions

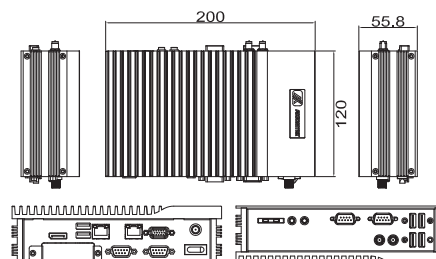

axiomtek.com

Overview

Embedded
Systems

Embedded
Systems for
Transportation

Embedded
Field
Controllers

Embedded
MicroBoxes

Industrial
Barebone
Systems

Industrial
Chassis

Backplanes

Power
Supplies

Peripherals &
Accessories