

# AX60551

## 8-slot ShoeBox Chassis



▲ Top view

Equipped with a power supply bracket securing the power supply better when the chassis is positioned in 90° orientation


### Specifications

|                             |   |
|-----------------------------|---|
| Standard Color              | Beige   |
| Construction                | Heavy-duty steel  |
| Drive Capacity              | Exposed 1 x 5.25" HDD drive bay and 1 x 3.5" HDD drive bay; internal 1 x 3.5" HDD drive bay |
| Cooling                     | 1 x 9 cm ball-bearing fan (51 CFM/each) with a removable filter                             |
| Front Panel Indicators      | 1 x power on/off; 1 x HDD   |
| Front Panel Controls        | 1 x power on/off; 1 x system reset  |
| Front Panel Connector       | 1 x PS/2 6-pin keyboard & mouse, 2 x USB  |
| Pre-punched Panel Rear      | 1 x 9-pin; 1 x 25-pin; 2 x USB (optional)   |
| System Board                | SBCs  |
| Expansion Interface         | 8-slot backplane  |
| Operating Temperature Range | 0°C ~ 40°C (32°F ~ 104°F)   |
| Dimensions                  | 280.2 mm (11") (W) x 415.8 mm (16.37") (D) x 197.3 mm (7.77") (H)                           |
| Weight (net/gross)          | 10.9 kg (24.03 lb)/11.2 kg (24.67 lb)   |

### Power Supply Specifications

| Items     | Watt           | Input                        | Specifications            |               | MTBF |
|-----------|----------------|------------------------------|---------------------------|---------------|------|
|           |                |                              | Output                    |               |      |
| PS300-XP2 | ATX 300W (PFC) | Slide Switch (115Vac/230Vac) | +5V @ 30/21.5A            | 100,000 hours |      |
|           |                |                              | +12V @ 15A                |               |      |
|           |                |                              | -12V @ 0.8A+3.3V @ 15/28A |               |      |
|           |                |                              | 5VSB @ 2A<br>-5V @ 0.3A   |               |      |

### Dimensions

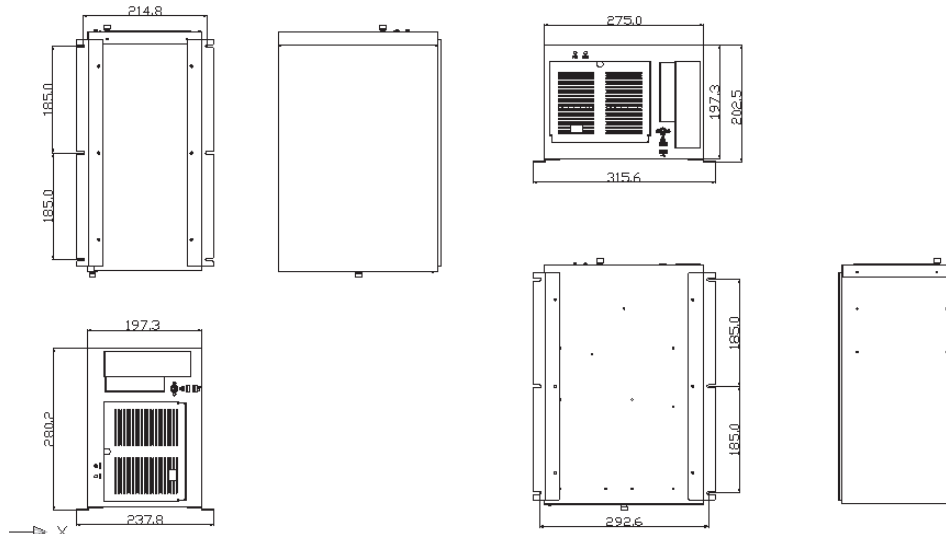

## Features

- Desktop or wallmount industrial computer chassis
- One 5.25" and two 3.5" HDD drive bays
- Equipped with a PS/2 type power supply

### Ordering Information

|                |                            |
|----------------|----------------------------|
| AX60551WB/X300 | With ATX 300W power supply |
| AX60551WB/X400 | With ATX 400W power supply |
| AX60551WB/X500 | With ATX 500W power supply |

\*Specifications and certifications are based on options and may vary.

### Backplane Options

#### PICMG 1.0

| Models       | Slots per Segment (ISA/PCI/PCIe/CPU) | Segment |
|--------------|--------------------------------------|---------|
| ATX6022/8    | 3/4/1                                | Single  |
| ATX6022/8GP7 | 0/7/1                                | Single  |

#### PICMG 1.3

| Models | Slots per Segment (ISA/PCI/PCIe/CPU) | Segment |
|--------|--------------------------------------|---------|
| FAB111 | 0/4/2/1                              | Single  |
| FAB116 | 0/3/4/1                              | Single  |
| FAB208 | 0/6/1/1                              | Single  |
| HAB208 | 0/6/1/1                              | Single  |

### Optional Items

- ATX 400W power supply with PFC
- ATX 500W power supply with PFC