


OPS871-HM

Socket G2 3rd Gen Intel® Core™ Open Pluggable Specification (OPS) Digital Signage Player with Intel® HM76 Chipset and TPM 1.2



1. 2.5" HDD slot
2. USB 3.0 x 2
3. Ethernet
4. HDMI
5. Power Switch
6. Reset
7. Audio (Line-out)
8. Audio (Mic-in)
9. Power indicator
10. HDD indicator
11. JAE TX-25
12. WiFi antenna (optional)

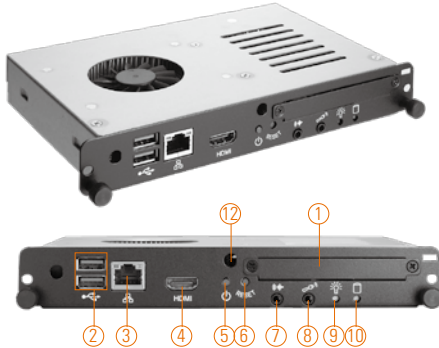

Specifications

Main System	CPU	Supports socket G2 (rPGA 988B) for 3rd Generation Intel® Core™ i5/ i3 processors (Ivy Bridge) (optional)
	Chipset	Intel® HM76 PCH
	System Memory	1 x 204-pin DDR3 1600 SO-DIMM max. up to 8 GB
	Storage	1 x 2.5" SATA HDD tray
	Watchdog Timer	255 levels, 1 ~ 255 sec.
IO	2 x USB 3.0	
	1 x 10/100/1000Mbps Ethernet	
	1 x Power on/off button	
	1 x Reset button	
	1 x HDMI	
	1 x Audio (Line-out/Mic-in)	
	1 x DisplayPort (via OPS JAE interconnector)	
	3 x USB 2.0 (via OPS JAE interconnector)	
	1 x USB 3.0 (via OPS JAE interconnector)	
	1 x HDMI/DVI (via OPS JAE interconnector)	
Indicator	1 x LED for system power ON	
	1 x LED for HDD active	
WiFi	Supports 802.11 a/b/g/n (optional)	
Expansion Slot	1 x PCI Express Mini Card	
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") (D)	
	x 30 mm (1.18") (H)	
Packing Dimensions	270 mm (10.63") (W) x 197 mm (7.76") (D)	
	x 70 mm (2.76") (H)	
Weight (net/gross)	1 kg (2.2 lb)/1.5 kg (3.3 lb)	
Environmental	0° ~ +45°C (32°F ~ 113°F) (With airflow 1.2m/s)	

Packing

- 1 x driver CD
- 1 x HDD mylar x 1
- 1 x thermal grease (syringe 1G)
- 2 x M3 x 4 screw
- 2 x M4 x 6 screw

* All specifications and photos are subject to change without notice.
© 2013 Axiomtek Co., Ltd. All rights reserved.

Features

- Open Pluggable Specification (OPS) compliance
- Supports socket G2 (rPGA 988B) 3rd Generation Intel® Core™ i5/ i3 processors (Ivy Bridge)
- DDR3 1600 SO-DIMM max. up to 8 GB
- USB 3.0, PCI Express Mini Card
- Easy maintenance: pluggable HDD and easy-to-change DRAM
- HDMI interface for 2nd display
- Supports TPM 1.2



▲ Rear view

Optional OS Installation

Windows® XP, Windows® 7

Ordering Information

Standard

OPS871-HM	OPS digital signage player supports socket G2 Intel® Core™ processor (Ivy Bridge)
-----------	---

Optional

OFF320	31.5" full HD digital signage display
OFF321	31.5" LED backlight full HD digital signage display
AX93157	OPS docking board

* Specification and certifications are based on options and may vary.

Dimensions

