


OFFP921-834

21.5" Full HD Digital Signage System for Bus PC

NEW

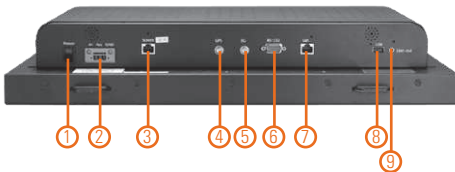

- | | |
|------------------|---------------------|
| 1. Power switch | 6. COM (RS-232) |
| 2. 24V DC input | 7. Ethernet |
| 3. DVI over CAT5 | 8. USB 2.0 |
| 4. GPS antenna | 9. Audio (Line-out) |
| 5. 3G antenna | |



Full HD DualView

Specifications

LCD Panel	Size	21.5"
	Contrast	1000:1
	Pixel Pitch	248.25 x 248.25 (um)
	Viewing Angle (H/V)	170° x 160°
	Response Time	5ms
	Color	16.7M
	Brightness (cd/m ²)	250
	Board	CPU
	Chipset	Intel® 945GC + ICH7
	Front Side Bus	800 MHz
	Onboard Graphics	Intel® Graphics Media Accelerator 950
	Memory	2 x 240-pin DIMM supports DDR2-400/533/667 max. up to 2 GB
	HDD	CompactFlash™
	Watchdog Timer	255 levels, 1V ~ 255 sec.
I/O	1 x USB 2.0	
	1 x RS-232	
	1 x DVI over CAT5	
	1 x GPS antenna	
	1 x 3G antenna	
	1 x power switch	
Ethernet	1 x 10/100/1000 Mbps Ethernet	
Expansion Slot	NA	
Audio	Line-out	
Touchscreen	N/A	
Power Supply	9 - 36VDC, PHOENIX DC power connector	
Dimensions	527 mm (20.74") (W) x 90.8 mm (3.57") (H) x 334 mm (13.14") (D)	
Packing Dimensions	720 mm (28.34") (W) x 205 mm (8.07") (D) x 540 mm (21.25") (H)	
Weight (net/gross)	TBD	
Environment	0 - 40°C, operation, 10% - 90% relative humidity	

523

Features

- 21.5" LED LCD – Full HD 1920 x 1080P
- Intel® Core™2 Duo E4300 1.8 GHz onboard
- DVI over CAT5 long distance dual display
- GPS antenna
- 3G antenna
- Supports VESA mount and special snap rings



▲ Side view



▲ Rear view

Ordering Information


Standard

OFFP921-834-CHT	21.5" digital signage platform with Intel® Core™2 Duo E4300 and 1920 x 1080 full HD resolution
E22K921101	DSE921-M 2nd display monitor

Optional

722F9210900E	AL hook for OFFP921-834
--------------	-------------------------

Ordering Information

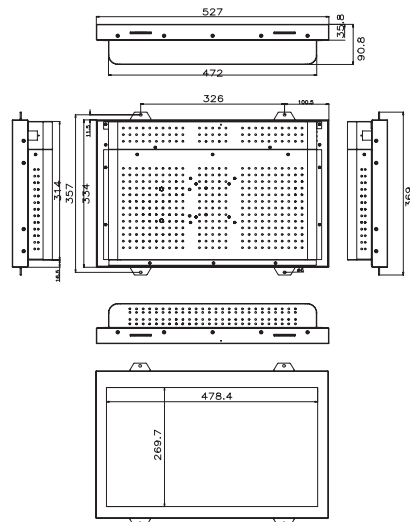

* All specifications and photos are subject to change without notice.