

## FEATURES

- Software Programmable Features
  - Unipolar/Bipolar Conversion
  - Differential/Single Ended Inputs
  - MSB-First or MSB/LSB Data Sequence
  - Power Shutdown
- Built-In Sample and Hold
- Single Supply 5V or  $\pm 5V$  Operation
- Direct 4-Wire Interface to Most MPU Serial Ports and All MPU Parallel Ports
- 46.5kHz Maximum Throughput Rate
- System Shutdown Output (LTC1296)

## KEY SPECIFICATIONS

- Resolution: 12 Bits
- Fast Conversion Time: 12 $\mu$ s Max Over Temp
- Low Supply Current: 6.0mA

## DESCRIPTION


The LTC1293/4/6 is a family of data acquisition systems which contain a serial I/O successive approximation A/D converter. It uses LTCMOS™ switched capacitor technology to perform either 12-bit unipolar, or 11-bit plus sign bipolar A/D conversions. The input multiplexer can be configured for either single ended or differential inputs (or combinations thereof). An on-chip sample and hold is included for all single ended input channels. When the LTC1293/4/6 is idle it can be powered down in applications where low power consumption is desired. The LTC1296 includes a System Shutdown Output pin which can be used to power down external circuitry, such as signal conditioning circuitry prior to the input mux.

The serial I/O is designed to communicate without external hardware to most MPU serial ports and all MPU parallel I/O ports allowing up to eight channels of data to be transmitted over as few as three wires.

LTCMOS™ is a trademark of Linear Technology Corporation

## TYPICAL APPLICATION

12-Bit Data Acquisition System with Power Shutdown

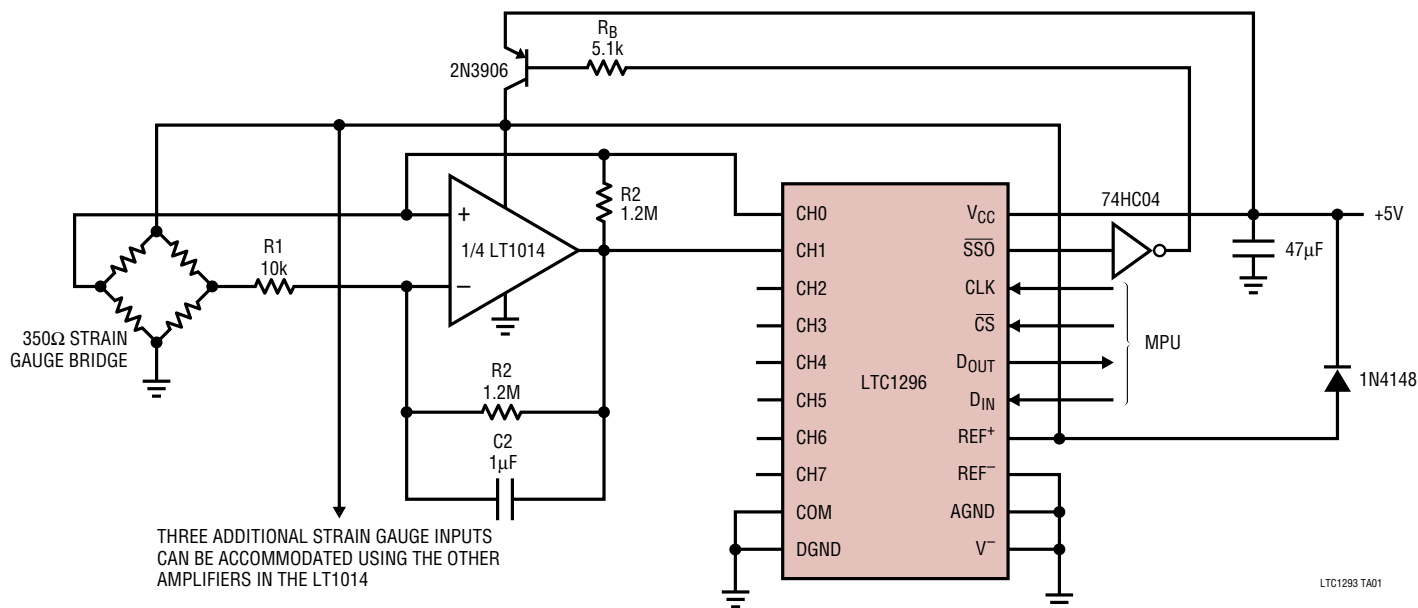

129346fs

# LTC1293/LTC1294/LTC1296

## ABSOLUTE MAXIMUM RATINGS (Notes 1 and 2)

Supply Voltage ( $V_{CC}$ ) to GND or  $V^-$  ..... 12V  
 Negative Supply Voltage ( $V^-$ ) ..... -6V to GND  
 Voltage  
 Analog and Reference  
 Inputs ..... ( $V^-$ ) -0.3V to  $V_{CC} + 0.3V$   
 Digital Inputs ..... -0.3V to 12V  
 Digital Outputs ..... -0.3V to  $V_{CC} + 0.3V$

Power Dissipation ..... 500mW  
 Operating Temperature Range  
 LTC1293/4/6BC, LTC1293/4/6CC,  
 LTC1293/4/6DC ..... 0°C to 70°C  
 LTC1296BI, LTC1296CI, LTC1296DI ... -40°C to 85°C  
 Storage Temperature Range ..... -65°C to 150°C  
 Lead Temperature (Soldering, 10 sec.) ..... 300°C

## PACKAGE/ORDER INFORMATION (Top Views) Consult factory for Industrial and Military grades.

|                                                                                                                                 |                                                                                                                                                                     |                                                                                                                                                                                                                    |                                                                                                                                                               |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>SW PACKAGE, 16-LEAD PLASTIC SO WIDE<br/> <math>T_{JMAX} = 110^{\circ}C</math>, <math>\theta_{JA} = 150^{\circ}C/W</math></p> | <p>ORDER PART NUMBER</p> <p>LTC1293BCSW<br/>             LTC1293CCSW<br/>             LTC1293DCSW</p>                                                               | <p>N PACKAGE, 16-LEAD PDIP<br/> <math>T_{JMAX} = 110^{\circ}C</math>, <math>\theta_{JA} = 100^{\circ}C/W</math> (N)</p>                                                                                            | <p>ORDER PART NUMBER</p> <p>LTC1293BCN<br/>             LTC1293CCN<br/>             LTC1293DCN</p>                                                            |
| <p>SW PACKAGE, 20-LEAD PLASTIC SO WIDE<br/> <math>T_{JMAX} = 110^{\circ}C</math>, <math>\theta_{JA} = 150^{\circ}C/W</math></p> | <p>LTC1294BCSW<br/>             LTC1294CCSW<br/>             LTC1294DCSW</p>                                                                                        | <p>N PACKAGE, 20-LEAD PDIP<br/> <math>T_{JMAX} = 110^{\circ}C</math>, <math>\theta_{JA} = 100^{\circ}C/W</math> (N)</p>                                                                                            | <p>LTC1294BCN<br/>             LTC1294CCN<br/>             LTC1294DCN</p>                                                                                     |
|                                                                                                                                 |                                                                                                                                                                     | <p>J PACKAGE, 20-LEAD CERDIP<br/> <math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 80^{\circ}C/W</math> (J)<br/> <b>OBsolete PACKAGE</b><br/>             Consider the N Package for Alternate Source</p> | <p>LTC1294BCJ<br/>             LTC1294CCJ<br/>             LTC1294DCJ</p>                                                                                     |
| <p>SW PACKAGE, 20-LEAD PLASTIC SO WIDE<br/> <math>T_{JMAX} = 110^{\circ}C</math>, <math>\theta_{JA} = 150^{\circ}C/W</math></p> | <p>LTC1296BCSW<br/>             LTC1296CCSW<br/>             LTC1296DCSW<br/>             LTC1296BISW<br/>             LTC1296CISW<br/>             LTC1296DISW</p> | <p>N PACKAGE, 20-LEAD PDIP<br/> <math>T_{JMAX} = 110^{\circ}C</math>, <math>\theta_{JA} = 100^{\circ}C/W</math> (N)</p>                                                                                            | <p>LTC1296BIN<br/>             LTC1296CIN<br/>             LTC1296DIN<br/>             LTC1296BCN<br/>             LTC1296CCN<br/>             LTC1296DCN</p> |
|                                                                                                                                 |                                                                                                                                                                     | <p>J PACKAGE, 20-LEAD CERDIP<br/> <math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 80^{\circ}C/W</math> (J)<br/> <b>OBsolete PACKAGE</b><br/>             Consider the N Package for Alternate Source</p> | <p>LTC1296BCJ<br/>             LTC1296CCJ<br/>             LTC1296DCJ</p>                                                                                     |

129346fs

**CONVERTER AND MULTIPLEXER CHARACTERISTICS**

(Note 3)

| PARAMETER                                                    | CONDITIONS                          |   | LTC1293/4/6B                                         |     |      | LTC1293/4/6C |     |      | LTC1293/4/6D |     |       | UNITS |
|--------------------------------------------------------------|-------------------------------------|---|------------------------------------------------------|-----|------|--------------|-----|------|--------------|-----|-------|-------|
|                                                              |                                     |   | MIN                                                  | TYP | MAX  | MIN          | TYP | MAX  | MIN          | TYP | MAX   |       |
| Offset Error                                                 | (Note 4)                            | ● |                                                      |     | ±3.0 |              |     | ±3.0 |              |     | ±3.0  | LSB   |
| Linearity Error (INL)                                        | (Notes 4, 5)                        | ● |                                                      |     | ±0.5 |              |     | ±0.5 |              |     | ±0.75 | LSB   |
| Gain Error                                                   | (Note 4)                            | ● |                                                      |     | ±0.5 |              |     | ±1.0 |              |     | ±4.0  | LSB   |
| Minimum Resolution for which No Missing Codes are Guaranteed |                                     | ● |                                                      |     | 12   |              |     | 12   |              |     | 12    | Bits  |
| Analog and REF Input Range                                   | (Note 7)                            |   | (V <sup>-</sup> ) - 0.05V to V <sub>CC</sub> + 0.05V |     |      |              |     |      |              |     |       | V     |
| On Channel Leakage Current (Note 8)                          | On Channel = 5V<br>Off Channel = 0V | ● |                                                      |     | ±1   |              |     | ±1   |              |     | ±1    | μA    |
|                                                              | On Channel = 0V<br>Off Channel = 5V | ● |                                                      |     | ±1   |              |     | ±1   |              |     | ±1    | μA    |
| Off Channel Leakage Current (Note 8)                         | On Channel = 5V<br>Off Channel = 0V | ● |                                                      |     | ±1   |              |     | ±1   |              |     | ±1    | μA    |
|                                                              | On Channel = 0V<br>Off Channel = 5V | ● |                                                      |     | ±1   |              |     | ±1   |              |     | ±1    | μA    |

**AC CHARACTERISTICS** (Note 3)

| SYMBOL              | PARAMETER                                       | CONDITIONS                                                              |   | LTC1293/4/6B<br>LTC1293/4/6C<br>LTC1293/4/6D |               |      | UNITS      |
|---------------------|-------------------------------------------------|-------------------------------------------------------------------------|---|----------------------------------------------|---------------|------|------------|
|                     |                                                 |                                                                         |   | MIN                                          | TYP           | MAX  |            |
| f <sub>CLK</sub>    | Clock Frequency                                 | V <sub>CC</sub> = 5V (Note 6)                                           |   | 0.1                                          |               | 1.0  | MHz        |
| t <sub>SMPL</sub>   | Analog Input Sample Time                        | See Operating Sequence                                                  |   |                                              | 2.5           |      | CLK Cycles |
| t <sub>CONV</sub>   | Conversion Time                                 | See Operating Sequence                                                  |   |                                              | 12            |      | CLK Cycles |
| t <sub>CYC</sub>    | Total Cycle Time                                | See Operating Sequence (Note 6)                                         |   | 21 CLK<br>+500ns                             |               |      | Cycles     |
| t <sub>dDO</sub>    | Delay Time, CLK↓ to D <sub>OUT</sub> Data Valid | See Test Circuits                                                       | ● |                                              | 160           | 300  | ns         |
| t <sub>dis</sub>    | Delay Time, CS↑ to D <sub>OUT</sub> Hi-Z        | See Test Circuits                                                       | ● |                                              | 80            | 150  | ns         |
| t <sub>en</sub>     | Delay Time, CLK↓ to D <sub>OUT</sub> Enabled    | See Test Circuits                                                       | ● |                                              | 80            | 200  | ns         |
| t <sub>hDI</sub>    | Hold Time, D <sub>IN</sub> after CLK↑           | V <sub>CC</sub> = 5V (Note 6)                                           |   | 50                                           |               |      | ns         |
| t <sub>hDO</sub>    | Time Output Data Remains Valid After CLK↓       |                                                                         |   |                                              | 130           |      | ns         |
| t <sub>f</sub>      | D <sub>OUT</sub> Fall Time                      | See Test Circuits                                                       | ● |                                              | 65            | 130  | ns         |
| t <sub>r</sub>      | D <sub>OUT</sub> Rise Time                      | See Test Circuits                                                       | ● |                                              | 25            | 50   | ns         |
| t <sub>WHCLK</sub>  | CLK High Time                                   | V <sub>CC</sub> = 5V (Note 6)                                           |   | 300                                          |               |      | ns         |
| t <sub>WLCLK</sub>  | CLK Low Time                                    | V <sub>CC</sub> = 5V (Note 6)                                           |   | 400                                          |               |      | ns         |
| t <sub>suDI</sub>   | Set-up Time, D <sub>IN</sub> Stable Before CLK↑ | V <sub>CC</sub> = 5V (Note 6)                                           |   | 50                                           |               |      | ns         |
| t <sub>suCS</sub>   | Set-up Time, CS↓ before CLK↑                    | V <sub>CC</sub> = 5V (Note 6)                                           |   | 50                                           |               |      | ns         |
| t <sub>wHCS</sub>   | CS High Time During Conversion                  | V <sub>CC</sub> = 5V (Note 6)                                           |   | 500                                          |               |      | ns         |
| t <sub>wLCS</sub>   | CS Low Time During Data Transfer                | V <sub>CC</sub> = 5V (Note 6)                                           |   | 21                                           |               |      | CLK Cycles |
| t <sub>enSSO</sub>  | Delay Time, CLK↓ to SSO↓                        | See Test Circuits                                                       | ● |                                              | 750           | 1500 | ns         |
| t <sub>disSSO</sub> | Delay Time, CS↓ to SSO↑                         | See Test Circuits                                                       | ● |                                              | 250           | 500  | ns         |
| C <sub>IN</sub>     | Input Capacitance                               | Analog Inputs On Channel<br>Analog Inputs Off Channel<br>Digital Inputs |   |                                              | 100<br>5<br>5 |      | pF         |

129346fs

**DIGITAL AND DC ELECTRICAL CHARACTERISTICS** (Note 3)

| SYMBOL        | PARAMETER                       | CONDITIONS                                                                         |        | LTC1293/4/6B<br>LTC1293/4/6C<br>LTC1293/4/6D |            |         | UNITS   |
|---------------|---------------------------------|------------------------------------------------------------------------------------|--------|----------------------------------------------|------------|---------|---------|
|               |                                 |                                                                                    |        | MIN                                          | TYP        | MAX     |         |
| $V_{IH}$      | High Level Input Voltage        | $V_{CC} = 5.25V$                                                                   | ●      | 2.0                                          |            |         | V       |
| $V_{IL}$      | Low Level Input Voltage         | $V_{CC} = 4.75V$                                                                   | ●      |                                              |            | 0.8     | V       |
| $I_{IH}$      | High Level Input Current        | $V_{IN} = V_{CC}$                                                                  | ●      |                                              |            | 2.5     | $\mu A$ |
| $I_{IL}$      | Low Level Input Current         | $V_{IN} = 0V$                                                                      | ●      |                                              |            | -2.5    | $\mu A$ |
| $V_{OH}$      | High Level Output Voltage       | $V_{CC} = 4.75V$ , $I_O = -10mA$<br>$I_O = 360\mu A$                               | ●      | 2.4                                          | 4.7<br>4.0 |         | V       |
| $V_{OL}$      | Low Level Output Voltage        | $V_{CC} = 4.75V$ , $I_O = 1.6mA$                                                   | ●      |                                              |            | 0.4     | V       |
| $I_{OZ}$      | High Z Output Leakage           | $V_{OUT} = V_{CC}$ , $\overline{CS}$ High<br>$V_{OUT} = 0V$ , $\overline{CS}$ High | ●<br>● |                                              |            | 3<br>-3 | $\mu A$ |
| $I_{SOURCE}$  | Output Source Current           | $V_{OUT} = 0V$                                                                     |        |                                              | -20        |         | mA      |
| $I_{SINK}$    | Output Sink Current             | $V_{OUT} = V_{CC}$                                                                 |        |                                              | 20         |         | mA      |
| $I_{CC}$      | Positive Supply Current         | $\overline{CS}$ High                                                               | ●      |                                              | 6          | 12      | mA      |
| $I_{CC}$      | Positive Supply Current         | $\overline{CS}$ High, Power Shutdown                                               | ●      |                                              | 5          | 10      | $\mu A$ |
|               |                                 | CLK Off                                                                            | ●      |                                              | 5          | 15      | $\mu A$ |
| $I_{REF}$     | Reference Current               | $\overline{CS}$ High                                                               | ●      |                                              | 10         | 50      | $\mu A$ |
| $I^-$         | Negative Supply Current         | $\overline{CS}$ High                                                               | ●      |                                              | 1          | 50      | $\mu A$ |
| $I_{SOURCEs}$ | $\overline{SSO}$ Source Current | $V_{\overline{SSO}} = 0V$                                                          | ●      | 0.8                                          | 1.5        |         | mA      |
| $I_{SINKs}$   | $\overline{SSO}$ Sink Current   | $V_{\overline{SSO}} = V_{CC}$                                                      | ●      | 0.5                                          | 1.0        |         | mA      |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

**Note 2:** All voltage values are with respect to DGND, AGND and  $REF^-$  wired together (unless otherwise noted).

**Note 3:**  $V_{CC} = 5V$ ,  $V_{REF+} = 5V$ ,  $V_{REF-} = 0V$ ,  $V^- = 0V$  for unipolar mode and  $-5V$  for bipolar mode,  $CLK = 1.0MHz$  unless otherwise specified. The ● denotes specifications which apply over the full operating temperature range; all other limits and typicals  $T_A = 25^\circ C$ .

**Note 4:** These specs apply for both unipolar and bipolar modes. In bipolar mode, one LSB is equal to the bipolar input span ( $2V_{REF}$ ) divided by 4096. For example, when  $V_{REF} = 5V$ ,  $1LSB$  (bipolar) =  $2(5V)/4096 = 2.44mV$ .

**Note 5:** Linearity error is specified between the actual end points of the A/D transfer curve. The deviation is measured from the center of the quantization band.


**Note 6:** Recommended operating conditions.

**Note 7:** Two on-chip diodes are tied to each reference and analog input which will conduct for reference or analog input voltages one diode drop below  $V^-$  or one diode drop above  $V_{CC}$ . Be careful during testing at low  $V_{CC}$  levels (4.5V), as high level reference or analog inputs (5V) can cause this input diode to conduct, especially at elevated temperatures, and cause errors for inputs near full scale. This spec allows 50mV forward bias of either diode. This means that as long as the reference or analog input does not exceed the supply voltage by more than 50mV, the output code will be correct. To achieve an absolute 0V to 5V input voltage range will therefore require a minimum supply voltage of 4.950V over initial tolerance, temperature variations and loading.

**Note 8:** Channel leakage current is measured after the channel selection.


## TYPICAL PERFORMANCE CHARACTERISTICS

Supply Current vs Supply Voltage

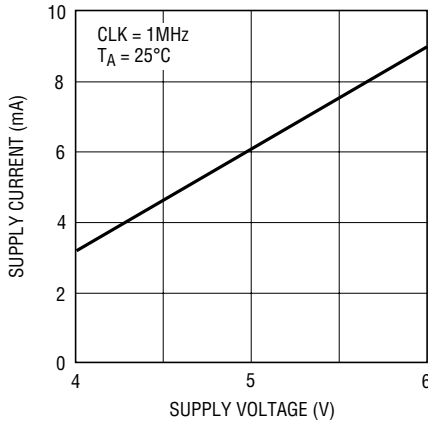


LTC1293 G01

Supply Current vs Temperature

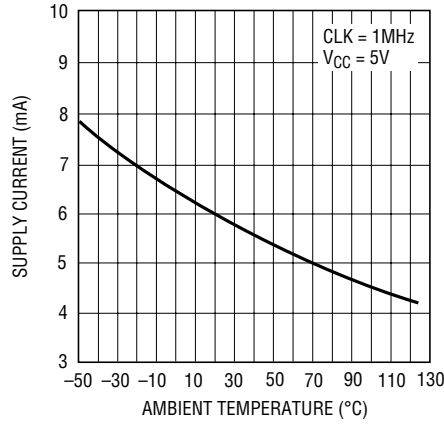


LTC1293 G02

Unadjusted Offset Voltage vs Reference Voltage

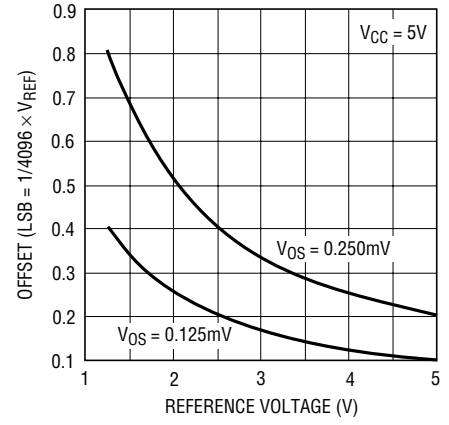


LTC1293 G03

Change in Linearity vs Reference Voltage

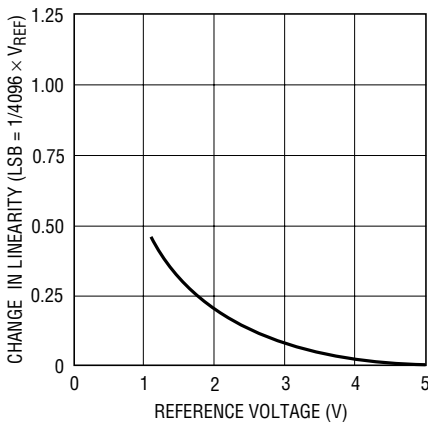


LTC1293 G04

Change in Gain vs Reference Voltage

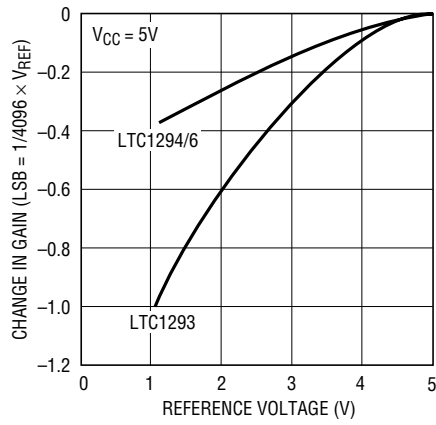


LTC1293 G05

Change in Offset vs Temperature

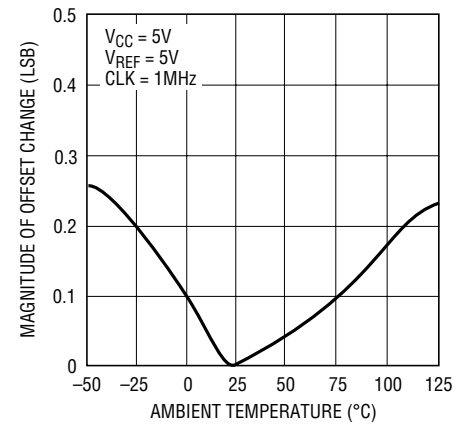


LTC1293 G06

Change in Linearity vs Temperature

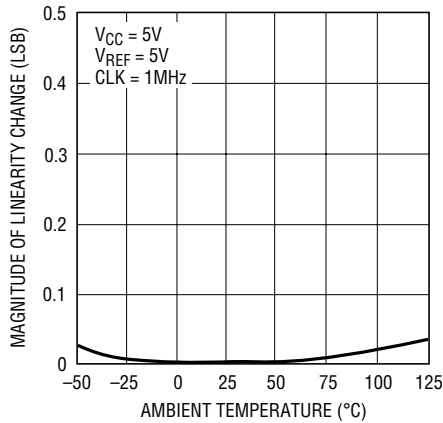


LTC1293 G07

Change in Gain vs Temperature

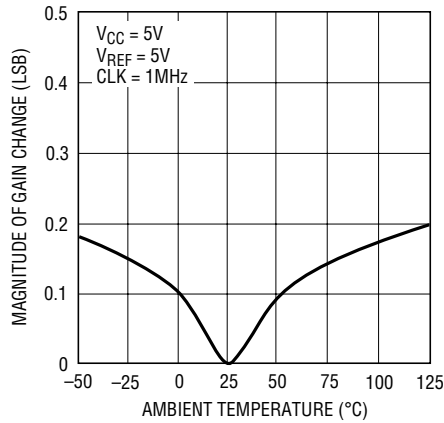

LTC1293 G08

Minimum Clock Rate for 0.1LSB Error

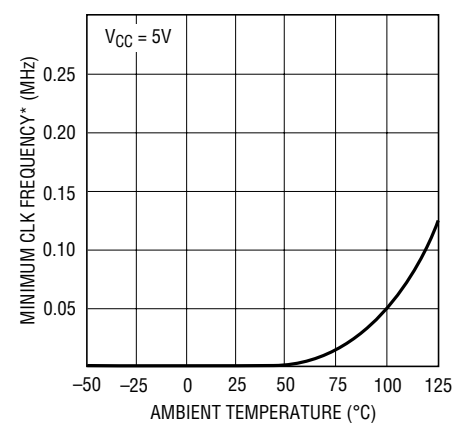


LTC1293 G09


\* AS THE CLK FREQUENCY IS DECREASED FROM 1MHz, MINIMUM CLK FREQUENCY (ΔERROR ≤ 0.1LSB) REPRESENTS THE FREQUENCY AT WHICH A 0.1LSB SHIFT IN ANY CODE TRANSITION FROM ITS 1MHz VALUE IS FIRST DETECTED.

129346fs


# TYPICAL PERFORMANCE CHARACTERISTICS

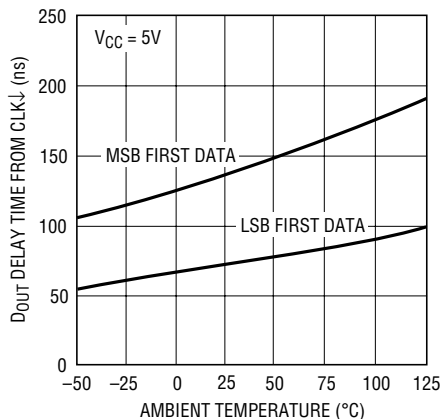**D<sub>OUT</sub> Delay Time vs Temperature**


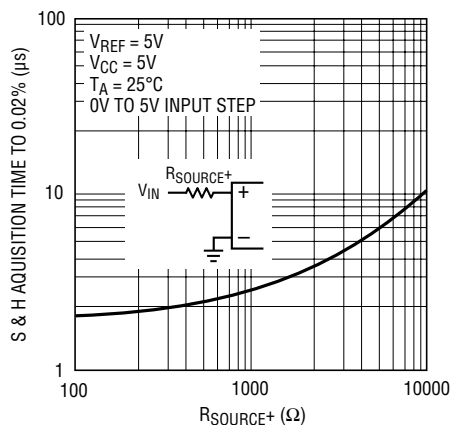
LTC1293 G10

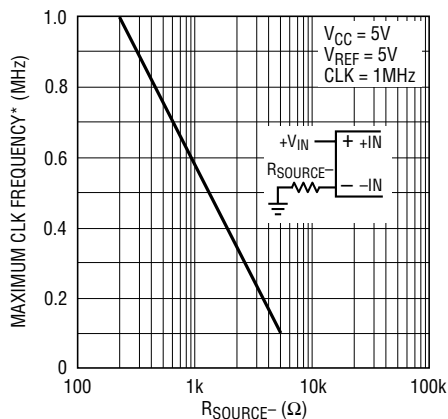**Maximum Clock Rate vs Source Resistance**


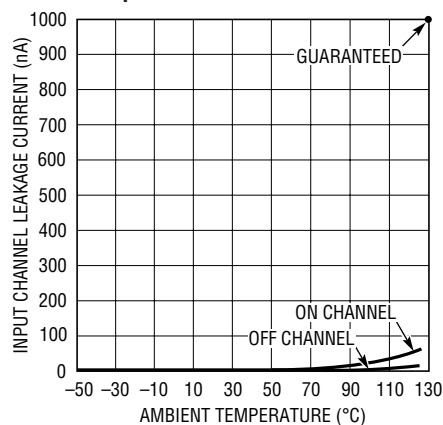
LTC1293 G11

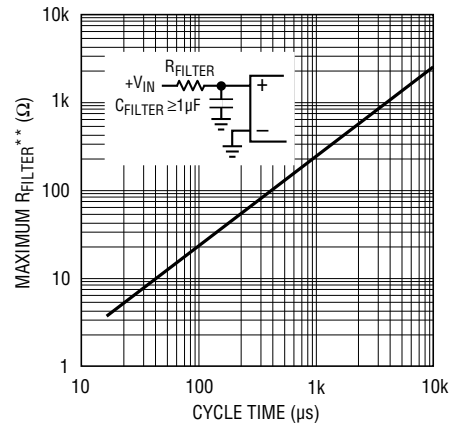**Maximum Filter Resistor vs Cycle Time**


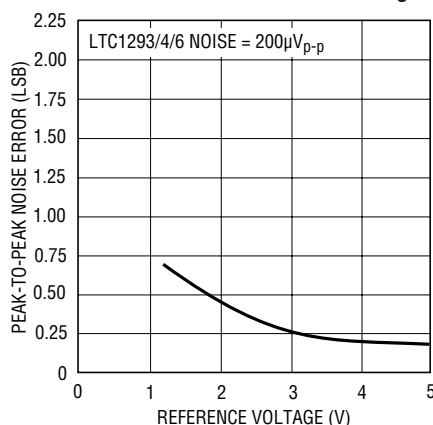
LTC1293 G12

**Sample and Hold Acquisition Time vs Source Resistance**


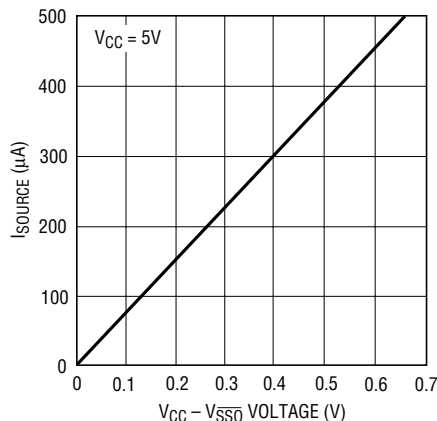
LTC1292 G13

**Input Channel Leakage Current vs Temperature**


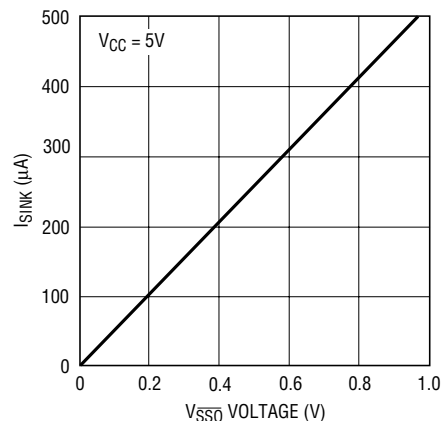
LTC1293 G14

**Noise Error vs Reference Voltage**


LTC1293 G15

**LTC1296  $\overline{SSO}$  Source Current vs  $V_{CC} - V_{SSO}$** 


LTC1293 G16

**LTC1296  $\overline{SSO}$  Sink Current vs  $V_{SSO}$** 


LTC1293 G17

\* MAXIMUM CLK FREQUENCY REPRESENTS THE CLK FREQUENCY AT WHICH A 0.1LSB SHIFT IN THE ERROR AT ANY CODE TRANSITION FROM ITS 1MHz VALUE IS FIRST DETECTED.

\*\* MAXIMUM  $R_{FILTER}$  REPRESENTS THE FILTER RESISTOR VALUE AT WHICH A 0.1LSB CHANGE IN FULL SCALE ERROR FROM ITS VALUE AT  $R_{FILTER} = 0\Omega$  IS FIRST DETECTED.

## PIN FUNCTIONS

### LTC1293

| #     | PIN              | FUNCTION            | DESCRIPTION                                                                                                                                           |
|-------|------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 – 6 | CH0 – CH5        | Analog Inputs       | The analog inputs must be free of noise with respect to AGND.                                                                                         |
| 7     | COM              | Common              | The common pin defines the zero reference point for all single ended inputs. It must be free of noise and is usually tied to the analog ground plane. |
| 8     | DGND             | Digital Ground      | This is the ground for the internal logic. Tie to the ground plane.                                                                                   |
| 9     | V <sup>-</sup>   | Negative Supply     | Tie V <sup>-</sup> to most negative potential in the circuit (Ground in single supply applications).                                                  |
| 10    | AGND             | Analog Ground       | AGND should be tied directly to the analog ground plane.                                                                                              |
| 11    | V <sub>REF</sub> | Ref. Input          | The reference inputs must be kept free of noise with respect to AGND.                                                                                 |
| 12    | D <sub>IN</sub>  | Data Input          | The A/D configuration word is shifted into this input.                                                                                                |
| 13    | D <sub>OUT</sub> | Digital Data Output | The A/D conversion result is shifted out of this output.                                                                                              |
| 14    | CS               | Chip Select Input   | A logic low on this input enables data transfer.                                                                                                      |
| 15    | CLK              | Clock               | This clock synchronizes the serial data transfer and controls A/D conversion rate.                                                                    |
| 16    | V <sub>CC</sub>  | Positive supply     | This supply must be kept free of noise and ripple by bypassing directly to the analog ground plane.                                                   |


### LTC1294

| #      | PIN                                 | FUNCTION            | DESCRIPTION                                                                                                                                                                    |
|--------|-------------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 – 8  | CH0 – CH7                           | Analog Inputs       | The analog inputs must be free of noise with respect to AGND.                                                                                                                  |
| 9      | COM                                 | Common              | The common pin defines the zero reference point for all single ended inputs. It must be free of noise and is usually tied to the analog ground plane.                          |
| 10     | DGND                                | Digital Ground      | This is the ground for the internal logic. Tie to the ground plane.                                                                                                            |
| 11     | V <sup>-</sup>                      | Negative Supply     | Tie V <sup>-</sup> to most negative potential in the circuit (Ground in single supply applications).                                                                           |
| 12     | AGND                                | Analog Ground       | AGND should be tied directly to the analog ground plane.                                                                                                                       |
| 13, 14 | REF <sup>-</sup> , REF <sup>+</sup> | Ref. Inputs         | The reference inputs must be kept free of noise with respect to AGND. The A/D sees a reference voltage equal to the difference between REF <sup>+</sup> and REF <sup>-</sup> . |
| 15     | D <sub>IN</sub>                     | Data Input          | The A/D configuration word is shifted into this input.                                                                                                                         |
| 16     | D <sub>OUT</sub>                    | Digital Data Output | The A/D conversion result is shifted out of this output.                                                                                                                       |
| 17     | CS                                  | Chip Select Input   | A logic low on this input enables data transfer.                                                                                                                               |
| 18     | CLK                                 | Clock               | This clock synchronizes the serial data transfer and controls A/D conversion rate.                                                                                             |
| 19, 20 | AV <sub>CC</sub> , DV <sub>CC</sub> | Positive Supplies   | These supplies must be kept free of noise and ripple by bypassing directly to the analog ground plane. AV <sub>CC</sub> and DV <sub>CC</sub> must be tied together.            |

### LTC1296


| #      | PIN                                 | FUNCTION               | DESCRIPTION                                                                                                                                                                    |
|--------|-------------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 – 8  | CH0 – CH7                           | Analog Inputs          | The analog inputs must be free of noise with respect to AGND.                                                                                                                  |
| 9      | COM                                 | Common                 | The common pin defines the zero reference point for all single ended inputs. It must be free of noise and is usually tied to the analog ground plane.                          |
| 10     | DGND                                | Digital Ground         | This is the ground for the internal logic. Tie to the ground plane.                                                                                                            |
| 11     | V <sup>-</sup>                      | Negative Supply        | Tie V <sup>-</sup> to most negative potential in the circuit (Ground in single supply applications).                                                                           |
| 12     | AGND                                | Analog Ground          | AGND should be tied directly to the analog ground plane.                                                                                                                       |
| 13, 14 | REF <sup>-</sup> , REF <sup>+</sup> | Ref. Inputs            | The reference inputs must be kept free of noise with respect to AGND. The A/D sees a reference voltage equal to the difference between REF <sup>+</sup> and REF <sup>-</sup> . |
| 15     | D <sub>IN</sub>                     | Data Input             | The A/D configuration word is shifted into this input.                                                                                                                         |
| 16     | D <sub>OUT</sub>                    | Digital Data Output    | The A/D conversion result is shifted out of this output.                                                                                                                       |
| 17     | CS                                  | Chip Select Input      | A logic low on this input enables data transfer.                                                                                                                               |
| 18     | CLK                                 | Clock                  | This clock synchronizes the serial data transfer and controls A/D conversion rate.                                                                                             |
| 19     | SSO                                 | System Shutdown Output | System Shutdown Output pin will go low when power shutdown is requested.                                                                                                       |
| 20     | V <sub>CC</sub>                     | Positive Supply        | This supply must be kept free of noise and ripple by bypassing directly to the analog ground plane.                                                                            |

## BLOCK DIAGRAM (Pin numbers refer to LTC1294)

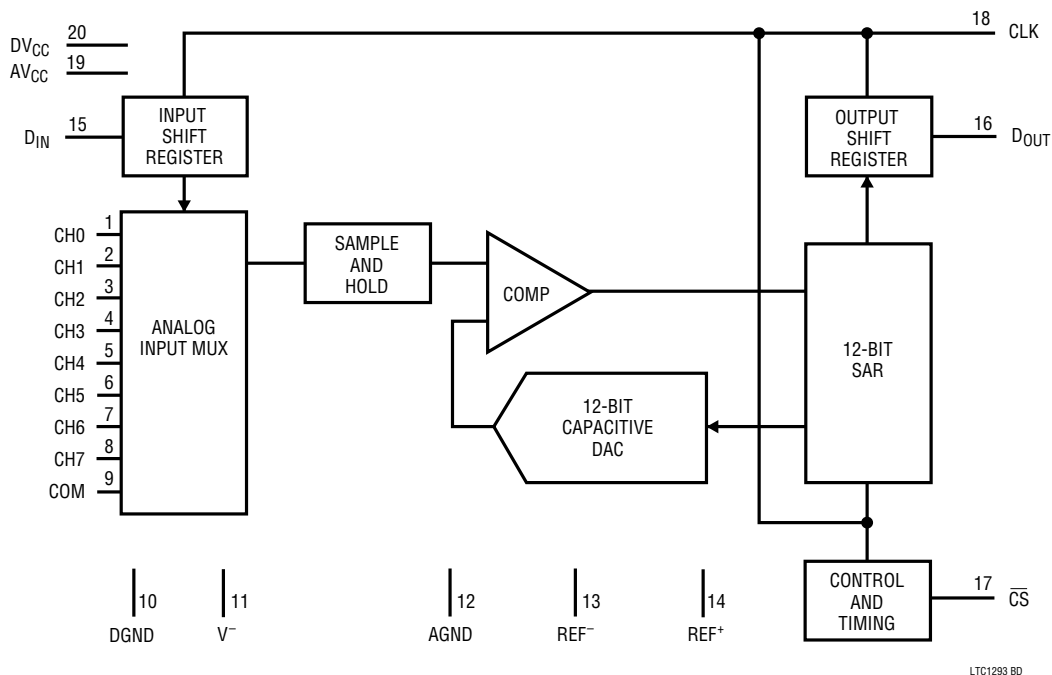


## TEST CIRCUITS


### Load Circuit for $t_{dPO}$ , $t_r$ and $t_f$

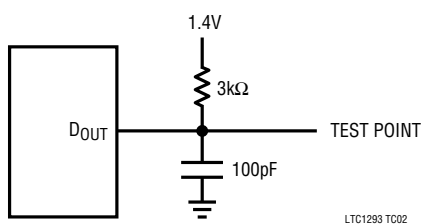


### Load Circuit for $t_{enSS0}$ and $t_{disSS0}$

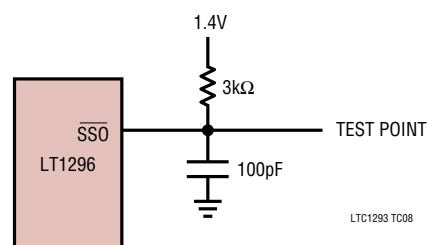






### Load Circuit for $t_{dis}$ and $t_{en}$

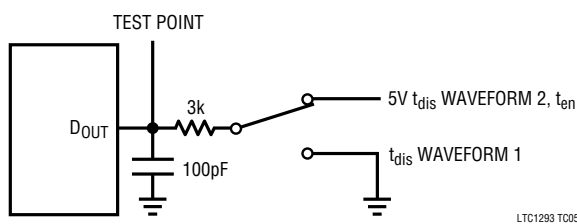


### On and Off Channel Leakage Current

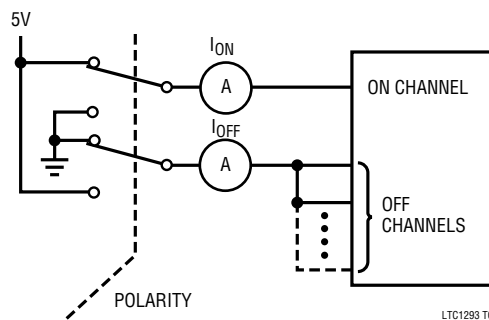

## TEST CIRCUITS

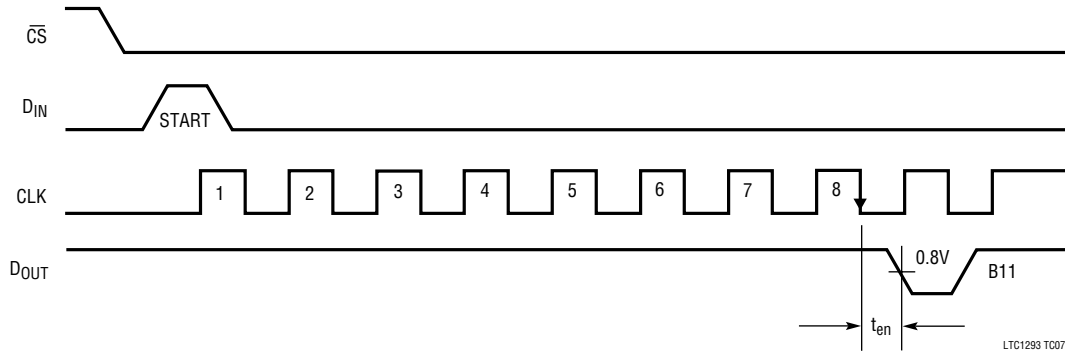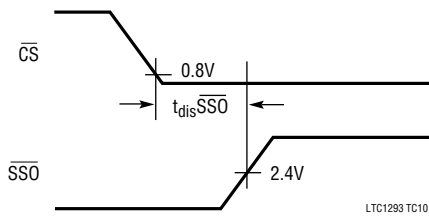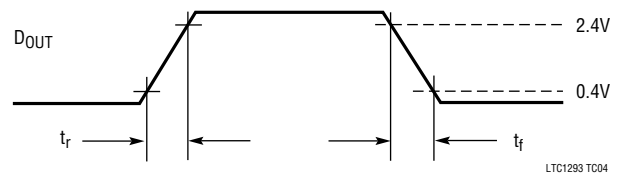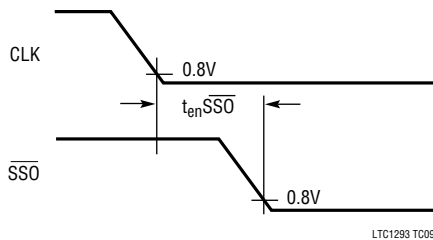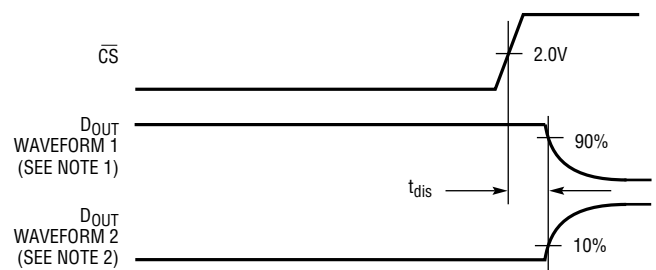Voltage Waveforms for  $t_{en}$ Voltage Waveform for  $t_{disSS0}$ Voltage Waveform for  $D_{OUT}$  Rise and Fall Times,  $t_r$ ,  $t_f$ Voltage Waveform for  $t_{enSS0}$ Voltage Waveform for  $t_{dis}$ 

**NOTE 1:** WAVEFORM 1 IS FOR AN OUTPUT WITH INTERNAL CONDITIONS SUCH THAT THE OUTPUT IS HIGH UNLESS DISABLED BY THE OUTPUT CONTROL.  
**NOTE 2:** WAVEFORM 2 IS FOR AN OUTPUT WITH INTERNAL CONDITIONS SUCH THAT THE OUTPUT IS LOW UNLESS DISABLED BY THE OUTPUT CONTROL.

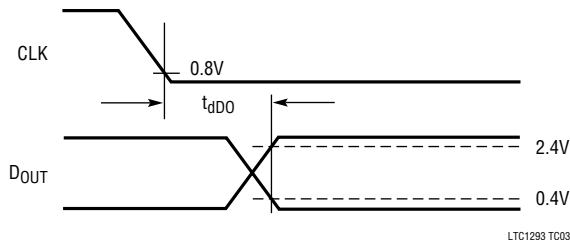Voltage Waveform for  $D_{OUT}$  Delay Time,  $t_{dDO}$ 

## APPLICATIONS INFORMATION


The LTC 1293/4/6 is a data acquisition component which contains the following functional blocks:

1. 12-bit successive approximation capacitive A/D converter
2. Analog multiplexer (MUX)
3. Sample and hold (S/H)
4. Synchronous, half duplex serial interface
5. Control and timing logic

## DIGITAL CONSIDERATIONS

### Serial Interface


The LTC1293/4/6 communicates with microprocessors and other external circuitry via a synchronous, half duplex, four-wire serial interface (see Operating Sequence). The clock (CLK) synchronizes the data transfer with each bit being transmitted on the falling CLK edge and captured on the rising CLK edge in both transmitting and receiving systems. The input data is first received and then the A/D conversion result is transmitted (half duplex). Because of

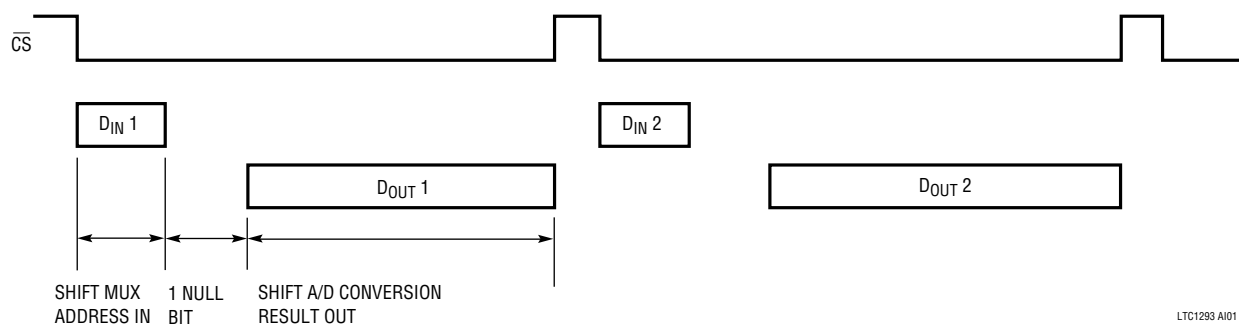

the half duplex operation  $D_{IN}$  and  $D_{OUT}$  may be tied together allowing transmission over just 3 wires:  $\overline{CS}$ , CLK and DATA ( $D_{IN}/D_{OUT}$ ). Data transfer is initiated by a falling chip select ( $\overline{CS}$ ) signal. After  $\overline{CS}$  falls the LTC1293/4/6 looks for a start bit. After the start bit is received a 7-bit input word is shifted into the  $D_{IN}$  input which configures the LTC1293/4/6 and starts the conversion. After one null bit, the result of the conversion is output on the  $D_{OUT}$  line. With the half duplex serial interface the  $D_{OUT}$  data is from the current conversion. After the end of the data exchange  $\overline{CS}$  should be brought high. This resets the LTC1293/4/6 in preparation for the next data exchange.

## INPUT DATA WORD

The LTC1293/4/6 seven-bit data word is clocked into the  $D_{IN}$  input on the rising edge of the clock after chip select goes low and the start bit has been recognized. Further inputs on the  $D_{IN}$  pin are then ignored until the next  $\overline{CS}$  cycle. The input word is defined as follows:

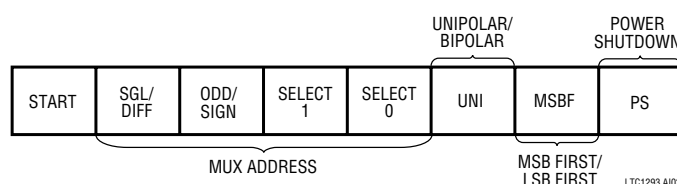

### Start Bit

The first "logical one" clocked into the  $D_{IN}$  input after  $\overline{CS}$  goes low is the start bit. The start bit initiates the data transfer and all leading zeroes which precede this logical one will be ignored. After the start bit is received the remaining bits of the input word will be clocked in. Further inputs on the  $D_{IN}$  pin are then ignored until the next  $\overline{CS}$  cycle.

### MUX Address

The four bits of the input word following the START BIT assign the MUX configuration for the requested conversion. For a given channel selection, the converter will measure the voltage between the two channels indicated by the + and - signs in the selected row of the following table. Note that in differential mode (SGL/DIFF = 0) measurements are limited to four adjacent input pairs with either polarity. In single ended mode, all input channels are measured with respect to COM. Only the +inputs have sample and holds. Signals applied at the -inputs must not change more than the required accuracy during the conversion.

LTC1293 AI01

129346fs

## APPLICATIONS INFORMATION

Table 1a. LTC1294/6 Multiplexer Channel Selection

| MUX ADDRESS |          |            | DIFFERENTIAL CHANNEL SELECTION |   |   |   |   |   |   |   | MUX ADDRESS |          |            | SINGLE-ENDED CHANNEL SELECTION |   |   |   |   |   |   |   |     |   |  |
|-------------|----------|------------|--------------------------------|---|---|---|---|---|---|---|-------------|----------|------------|--------------------------------|---|---|---|---|---|---|---|-----|---|--|
| SGL/DIFF    | ODD SIGN | SELECT 1 0 | 0                              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | SGL/DIFF    | ODD SIGN | SELECT 1 0 | 0                              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | COM |   |  |
| 0           | 0        | 0 0        | +                              | − |   |   |   |   |   |   | 1           | 0        | 0 0        | +                              |   |   |   |   |   |   |   |     | − |  |
| 0           | 0        | 0 1        |                                |   | + | − |   |   |   |   | 1           | 0        | 0 1        |                                |   | + |   |   |   |   |   |     | − |  |
| 0           | 0        | 1 0        |                                |   |   |   | + | − |   |   | 1           | 0        | 1 0        |                                |   |   |   | + |   |   |   |     | − |  |
| 0           | 0        | 1 1        |                                |   |   |   |   |   | + | − | 1           | 0        | 1 1        |                                |   |   |   |   |   | + |   |     | − |  |
| 0           | 1        | 0 0        | −                              | + |   |   |   |   |   |   | 1           | 1        | 0 0        |                                | + |   |   |   |   |   |   |     | − |  |
| 0           | 1        | 0 1        |                                |   | − | + |   |   |   |   | 1           | 1        | 0 1        |                                |   |   | + |   |   |   |   |     | − |  |
| 0           | 1        | 1 0        |                                |   |   |   | − | + |   |   | 1           | 1        | 1 0        |                                |   |   |   |   | + |   |   |     | − |  |
| 0           | 1        | 1 1        |                                |   |   |   |   |   | − | + | 1           | 1        | 1 1        |                                |   |   |   |   |   |   | + |     | − |  |

Table 1b. LTC1293 Channel Selection

| MUX ADDRESS |          |            | DIFFERENTIAL CHANNEL SELECTION |   |   |   |   |   | MUX ADDRESS |          |            | SINGLE-ENDED CHANNEL SELECTION |   |   |   |   |   |     |  |
|-------------|----------|------------|--------------------------------|---|---|---|---|---|-------------|----------|------------|--------------------------------|---|---|---|---|---|-----|--|
| SGL/DIFF    | ODD SIGN | SELECT 1 0 | 0                              | 1 | 2 | 3 | 4 | 5 | SGL/DIFF    | ODD SIGN | SELECT 1 0 | 0                              | 1 | 2 | 3 | 4 | 5 | COM |  |
| 0           | 0        | 0 0        | +                              | − |   |   |   |   | 1           | 0        | 0 0        | +                              |   |   |   |   |   | −   |  |
| 0           | 0        | 0 1        |                                |   | + | − |   |   | 1           | 0        | 0 1        |                                |   | + |   |   |   | −   |  |
| 0           | 0        | 1 0        |                                |   |   |   | + | − | 1           | 0        | 1 0        |                                |   |   |   | + |   | −   |  |
| 0           | 0        | 1 1        | Not Used                       |   |   |   |   |   | 1           | 0        | 1 1        | Not Used                       |   |   |   |   |   |     |  |
| 0           | 1        | 0 0        | −                              | + |   |   |   |   | 1           | 1        | 0 0        |                                | + |   |   |   |   | −   |  |
| 0           | 1        | 0 1        |                                |   | − | + |   |   | 1           | 1        | 0 1        |                                |   |   | + |   |   | −   |  |
| 0           | 1        | 1 0        |                                |   |   |   | − | + | 1           | 1        | 1 0        |                                |   |   |   |   | + | −   |  |
| 0           | 1        | 1 1        | Not Used                       |   |   |   |   |   | 1           | 1        | 1 1        | Not Used                       |   |   |   |   |   |     |  |

### Unipolar/Bipolar (UNI)

The UNI bit determines whether the conversion will be unipolar or bipolar. When UNI is a logical one, a unipolar conversion will be performed on the selected input volt-


age. When UNI is a logical zero, a bipolar conversion will result. The input span and code assignment for each conversion type are shown in the figures below:

Unipolar Transfer Curve (UNI = 1)

| OUTPUT CODE      | INPUT VOLTAGE    | INPUT VOLTAGE (VREF = 5V) |
|------------------|------------------|---------------------------|
| 1111111111111111 | $V_{REF} - 1LSB$ | 4.9988V                   |
| 1111111111111110 | $V_{REF} - 2LSB$ | 4.9976V                   |
| ⋮                | ⋮                | ⋮                         |
| 0000000000000001 | 1LSB             | 0.0012V                   |
| 0000000000000000 | 0V               | 0V                        |

LTC1293 AI03a

Unipolar Output Code (UNI = 1)

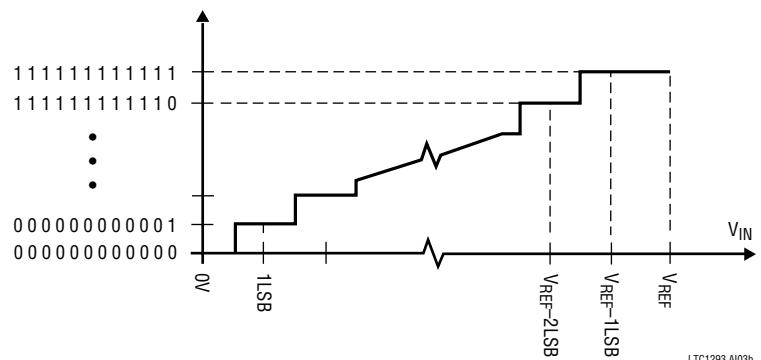

LTC1293 AI03b


## APPLICATIONS INFORMATION

Bipolar Transfer Curve (UNI = 0)

| OUTPUT CODE  | INPUT VOLTAGE    | INPUT VOLTAGE<br>( $V_{REF} = 5V$ ) | OUTPUT CODE  | INPUT VOLTAGE       | INPUT VOLTAGE<br>( $V_{REF} = 5V$ ) |
|--------------|------------------|-------------------------------------|--------------|---------------------|-------------------------------------|
| 011111111111 | $V_{REF} - 1LSB$ | 4.9976V                             | 111111111111 | -1LSB               | -0.0024V                            |
| 011111111110 | $V_{REF} - 2LSB$ | 4.9851V                             | 111111111110 | -2LSB               | -0.0048V                            |
| ⋮            | ⋮                | ⋮                                   | ⋮            | ⋮                   | ⋮                                   |
| 000000000001 | 1LSB             | 0.0024V                             | 100000000001 | $-(V_{REF}) + 1LSB$ | -4.9976V                            |
| 000000000000 | 0V               | 0V                                  | 100000000000 | $-(V_{REF})$        | -5.0000V                            |

LTC1293 AI04a

Bipolar Output Code (UNI = 0)

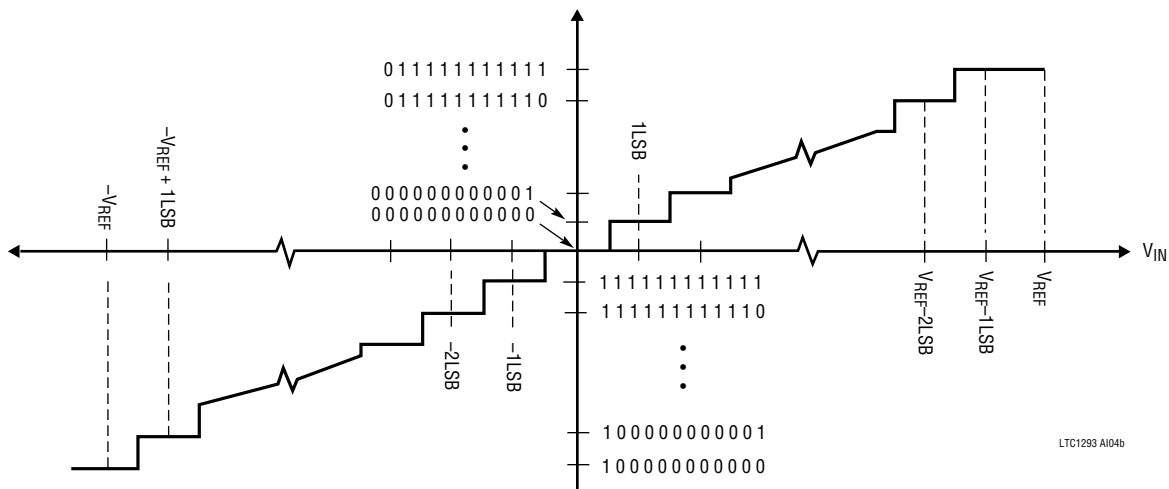

LTC1293 AI04b

The following discussion will demonstrate how the two reference pins are to be used in conjunction with the analog input multiplexer. In unipolar mode the input span of the A/D is set by the difference in voltage on the  $REF^+$  pin and the  $REF^-$  pin. In the bipolar mode the input span is twice the difference in voltage on the  $REF^+$  pin and the  $REF^-$  pin. In the unipolar mode the lower value of the input span is set by the voltage on the COM pin for single-ended inputs and by the voltage on the minus input pin for differential inputs. For the bipolar mode of operation the voltage on the COM pin or the minus input pin set the center of the input span.

The upper and lower value of the input span can now be summarized in the following table:

| INPUT CONFIGURATION |             | UNIPOLAR MODE            | BIPOLAR MODE              |
|---------------------|-------------|--------------------------|---------------------------|
| Single-Ended        | Lower Value | COM                      | $-(REF^+ - REF^-) + COM$  |
|                     | Upper Value | $(REF^+ - REF^-) + COM$  | $(REF^+ - REF^-) + COM$   |
| Differential        | Lower Value | $IN^-$                   | $-(REF^+ - REF^-) + IN^-$ |
|                     | Upper Value | $(REF^+ - REF^-) + IN^-$ | $(REF^+ - REF^-) + IN^-$  |

The reference voltages  $REF^+$  and  $REF^-$  can fall between  $V_{CC}$  and  $V^-$ , but the difference  $(REF^+ - REF^-)$  must be less than or equal to  $V_{CC}$ . The input voltages must be less than or equal to  $V_{CC}$  and greater than or equal to  $V^-$ . For the LTC1293  $REF^- = 0V$ .

The following examples are for a single-ended input configuration.

**Example 1:** Let  $V_{CC} = 5V$ ,  $V^- = 0V$ ,  $REF^+ = 4V$ ,  $REF^- = 1V$  and  $COM = 0V$ . Unipolar mode of operation. The resulting input span is  $0V \leq IN^+ \leq 3V$ .

## APPLICATIONS INFORMATION

**Example 2:** The same conditions as Example 1 except  $COM = 1V$ . The resulting input span is  $1V \leq IN^+ \leq 4V$ . Note if  $IN^+ \geq 4V$  the resulting  $D_{OUT}$  word is all 1's. If  $IN^+ \leq 1V$  then the resulting  $D_{OUT}$  word is all 0's.

**Example 3:** Let  $V_{CC} = 5V$ ,  $V^- = -5V$ ,  $REF^+ = 4V$ ,  $REF^- = 1V$  and  $COM = 1V$ . Bipolar mode of operation. The resulting input span is  $-2V \leq IN^+ \leq 4V$ .

For differential input configurations with the same conditions as in the above three examples the resulting input spans are as follows:

**Example 1 (Diff.):**  $IN^- \leq IN^+ \leq IN^- + 3V$ .

**Example 2 (Diff.):**  $IN^- \leq IN^+ \leq IN^- + 3V$ .

**Example 3 (Diff.):**  $IN^- - 3V \leq IN^+ \leq IN^- + 3V$ .


### MSB-First/LSB-First (MSBF)

The output data of the LTC1293/4/6 is programmed for MSB-first or LSB-first sequence using the MSBF bit. When the MSBF bit is a logical one, data will appear on the  $D_{OUT}$  line in MSB-first format. Logical zeroes will be filled in indefinitely following the last data bit to accommodate longer word lengths required by some microprocessors. When the MSBF bit is a logical zero, LSB first data will follow the normal MSB first data on the  $D_{OUT}$  line. In the bipolar mode the sign bit will fill in after the MSB bit for  $MSBF = 0$  (see Operating Sequence).

### Power Shutdowns (PS)


The power shutdown feature of the LTC1293/4/6 is activated by making the PS bit a logical zero. If  $\overline{CS}$  remains low after the PS bit has been received, a 12-bit  $D_{OUT}$  word with

**Operating Sequence**  
Example: Differential Inputs ( $CH4^+$ ,  $CH5^-$ ), Unipolar Mode

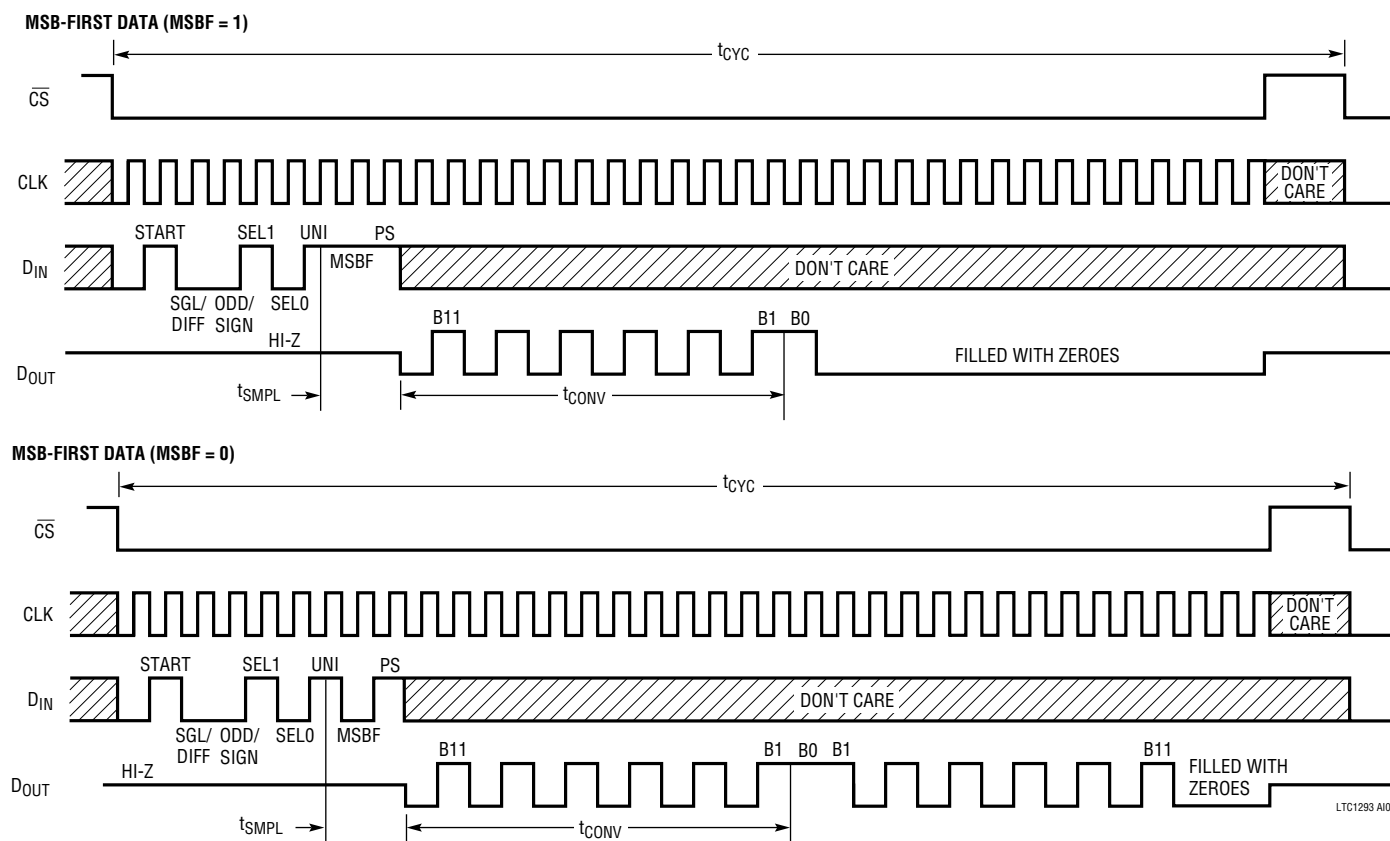

## APPLICATIONS INFORMATION

**Power Shutdown Operating Sequence**  
**Example: Differential Inputs (CH4<sup>+</sup>, CH5<sup>-</sup>), Unipolar Mode and MSB-First Data**

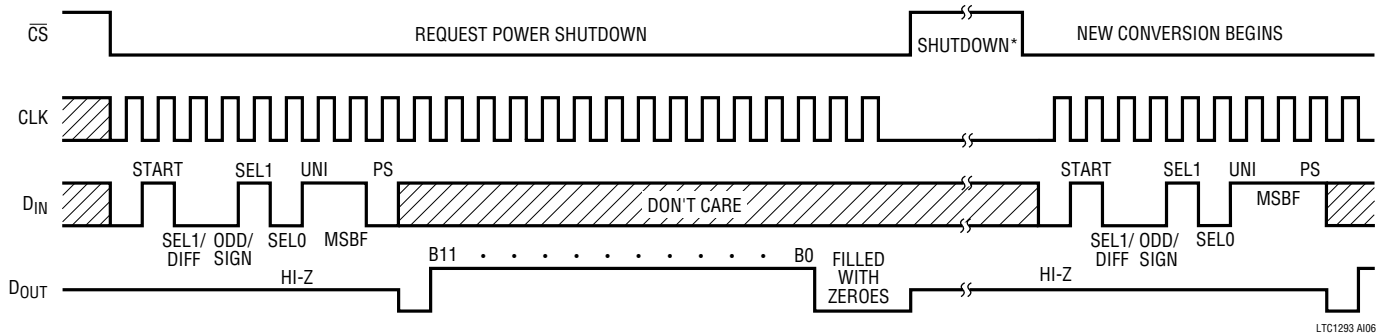

all logical ones will be shifted out followed by logical zeroes till  $\overline{CS}$  goes high. Then the  $D_{OUT}$  line will go into its high impedance state. The LTC 1293/4/6 will remain in the shutdown mode till the next  $\overline{CS}$  cycle. There is no warm-up or wait period required after coming out of the power shutdown cycle so a conversion can commence after  $\overline{CS}$  goes low (see Power Shutdown Operating Sequence). The LTC1296 has a System Shutdown Output pin ( $\overline{SSO}$ ) which will go low when power shutdown is activated. The pin will stay low till next  $\overline{CS}$  cycle.

### Microprocessor Interfaces

The LTC1293/4/6 can interface directly (without external hardware) to most popular microprocessors (MPU) synchronous serial formats (see Table 1). If an MPU without a dedicated serial port is used, then three of the MPU's parallel port lines can be programmed to form the serial link to the LTC1293/4/6. Included here are one serial interface example and one example showing a parallel port programmed to form the serial interface.

### Microprocessor Interfaces

The LTC1293/4/6 can interface directly (without external hardware) to most popular microprocessors (MPU) synchronous serial formats (see Table 1). If an MPU without a dedicated serial port is used, then three of the MPU's parallel port lines can be programmed to form the serial link to the LTC1293/4/6.

**Table 1. Microprocessor with Hardware Serial Interfaces Compatible with the LTC1293/4/6\*\***

| PART NUMBER                                                                                                    | TYPE OF INTERFACE                                                                             |
|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>Motorola</b><br>MC6805S2, S3<br>MC68HC11<br>MC68HC05                                                        | SPI<br>SPI<br>SPI                                                                             |
| <b>RCA</b><br>CDP68HC05                                                                                        | SPI                                                                                           |
| <b>Hitachi</b><br>HD6305<br>HD6301<br>HD63701<br>HD6303<br>HD64180                                             | SCI Synchronous<br>SCI Synchronous<br>SCI Synchronous<br>SCI Synchronous<br>SCI Synchronous   |
| <b>National Semiconductor</b><br>COP400 Family<br>COP800 Family<br>NS8050U<br>HPC16000 Family                  | MICROWIRE <sup>†</sup><br>MICROWIRE/PLUS <sup>†</sup><br>MICROWIRE/PLUS<br>MICROWIRE/PLUS     |
| <b>Texas Instruments</b><br>TMS7002<br>TMS7042<br>TMS70C02<br>TMS70C42<br>TMS32011*<br>TMS32020*<br>TMS370C050 | Serial Port<br>Serial Port<br>Serial Port<br>Serial Port<br>Serial Port<br>Serial Port<br>SPI |

\* Requires external hardware

\*\* Contact factory for interface information for processors not on this list

<sup>†</sup> MICROWIRE and MICROWIRE/PLUS are trademarks of National Semiconductor Corp.




APPLICATIONS INFORMATION


MC68HC11 CODE

| LABEL | MNEMONIC | OPERAND     | COMMENTS                          | LABEL | MNEMONIC | OPERAND     | COMMENTS                            |
|-------|----------|-------------|-----------------------------------|-------|----------|-------------|-------------------------------------|
| LOOP  | LDA      | #50         | CONFIGURATION DATA FOR SPCR       | WAIT2 | STAA     | \$102A      | LOAD DIN INTO SPI, START SCK        |
|       | STA      | \$1028      | LOAD DATA INTO SPCR (\$1028)      |       | LDA      | \$1029      | CHECK SPI STATUS REG                |
|       | LDA      | #1B         | CONFIG. DATA FOR PORT D DDR       |       | BPL      | WAIT2       | CHECK IF TRANSFER IS DONE           |
|       | STA      | \$1009      | LOAD DATA INTO PORT D DDR         |       | LDA      | \$102A      | LOAD LTC1294 MSBs INTO ACC A        |
|       | LDA      | #10         | LOAD DIN WORD INTO ACC A          | WAIT3 | STA      | \$62        | STORE MSBs IN \$62                  |
|       | STA      | \$50        | LOAD DIN DATA INTO \$50           |       | LDA      | \$52        | LOAD DUMMY DIN INTO ACC A FROM \$52 |
|       | LDA      | #E0         | LOAD DIN WORD INTO ACC A          |       | STA      | \$102A      | LOAD DUMMY DIN INTO SPI, START SCK  |
|       | STA      | \$51        | LOAD DIN DATA INTO \$51           |       | LDA      | \$1029      | CHECK SPI STATUS REG                |
|       | LDA      | #00         | LOAD DUMMY DIN WORD INTO ACC A    |       | BPL      | WAIT3       | CHECK IF TRANSFER IS DONE           |
|       | STA      | \$52        | LOAD DUMMY DIN DATA INTO \$52     |       | BSET     | \$08,X,\$01 | DO GOES HIGH (CS GOES HIGH)         |
|       | LDX      | #1000       | LOAD INDEX REGISTER X WITH \$1000 |       | LDA      | \$102A      | LOAD LTC1294 LSBs IN ACC            |
|       | BCLR     | \$08,X,\$01 | DO GOES LOW (CS GOES LOW)         |       | STA      | \$63        | STORE LSBs IN \$63                  |
|       | LDA      | \$50        | LOAD DIN INTO ACC A FROM \$50     |       | JMP      | LOOP        | START NEXT CONVERSION               |
|       | STA      | \$102A      | LOAD DIN INTO SPI, START SCK      |       |          |             |                                     |
|       | LDA      | \$1029      | CHECK SPI STATUS REG              |       |          |             |                                     |
|       | BPL      | WAIT1       | CHECK IF TRANSFER IS DONE         |       |          |             |                                     |
|       | LDA      | \$51        | LOAD DIN INTO ACC A FROM \$51     |       |          |             |                                     |
| WAIT1 |          |             |                                   |       |          |             |                                     |

Hardware and Software Interface to Intel 8051

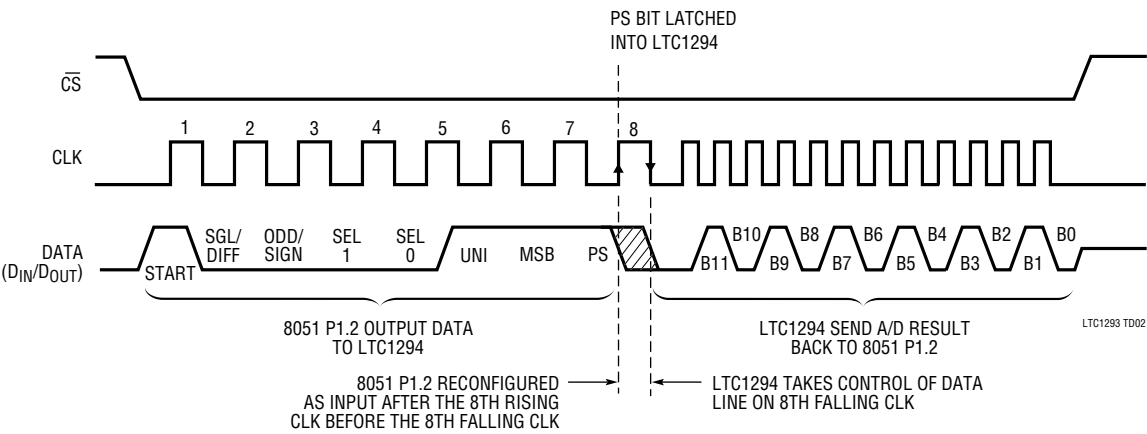

Hardware and Software Interface to Intel 8051

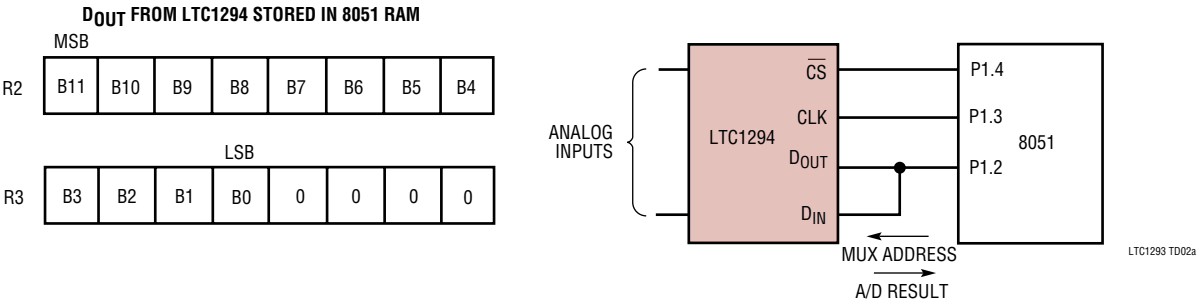



## APPLICATIONS INFORMATION

LTC1294. Figure 4 shows an example of an ideal LTC1293/4/6 ground plane design for a two sided board. Of course this much ground plane will not always be possible, but users should strive to get as close to this ideal as possible.

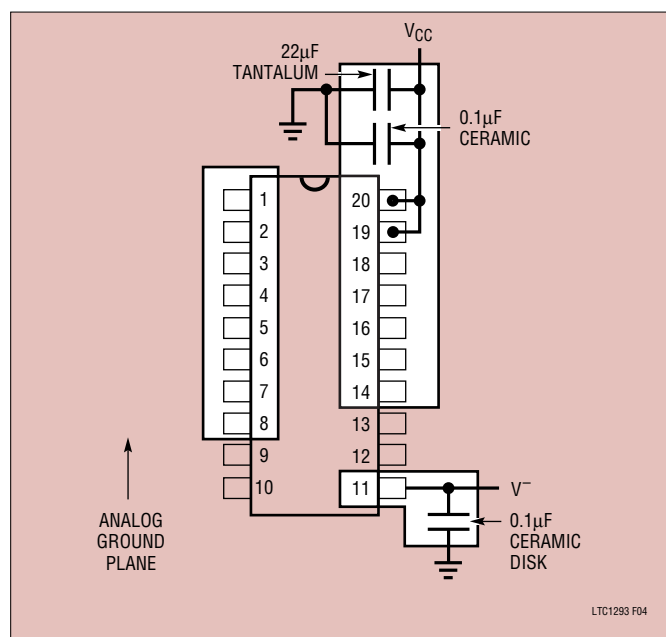


Figure 4. Ground Plane for the LTC1293/4/6

## Bypassing

For good performance,  $V_{CC}$  must be free of noise and ripple. Any changes in the  $V_{CC}$  voltage with respect to ground during a conversion cycle can induce errors or noise in the output code.  $V_{CC}$  noise and ripple can be kept below 0.5mV by bypassing the  $V_{CC}$  pin directly to the analog ground plane with a minimum of 22µF tantalum capacitor and with leads as short as possible. The lead from the device to the  $V_{CC}$  supply also should be kept to a minimum and the  $V_{CC}$  supply should have a low output impedance such as obtained from a voltage regulator (e.g., LT323A). For high frequency bypassing a 0.1µF ceramic disk placed in parallel with the 22µF is recommended. Again the leads should be kept to a minimum. Figure 5 and 6 show the effects of good and poor  $V_{CC}$  bypassing.




Figure 5. Poor  $V_{CC}$  Bypassing. Noise and Ripple Can Cause A/D Errors.




Figure 6. Good  $V_{CC}$  Bypassing Keeps Noise and Ripple on  $V_{CC}$  Below 1mV

## Analog Inputs

Because of the capacitive redistribution A/D conversion techniques used, the analog inputs of the LTC1293/4/6 have capacitive switching input current spikes. These current spikes settle quickly and do not cause a problem. If large source resistances are used or if slow settling op amps drive the inputs, take care to insure the transients caused by the current spikes settle completely before the conversion begins.

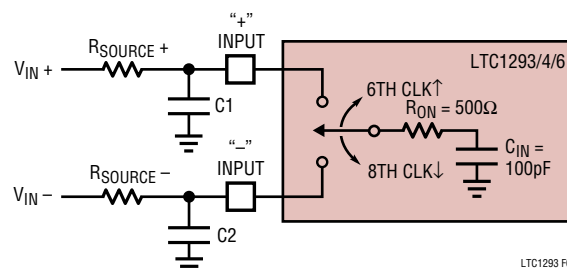


Figure 7. Analog Input Equivalent Circuit

## APPLICATIONS INFORMATION

### Source Resistance

The analog inputs of the LTC1293/4/6 look like a 100pF capacitor ( $C_{IN}$ ) in series with a 500 $\Omega$  resistor ( $R_{ON}$ ).  $C_{IN}$  gets switched between (+) and (–) inputs once during each conversion cycle. Large external source resistors and capacitances will slow the settling of the inputs. It is important that the overall RC time constant is short enough to allow the analog inputs to settle completely within the allowed time.

### “+” Input Settling

The input capacitor is switched onto the “+” input during the sample phase ( $t_{SMPL}$ , see Figure 8). The sample period 2 1/2 CLK cycles before a conversion starts. The voltage on the “+” input must settle completely within the sample period. Minimizing  $R_{SOURCE+}$  and  $C1$  will improve the settling time. If large “+” input source resistance must be used, the sample time can be increased by using a slower CLK frequency. With the minimum possible sample time of 2.5 $\mu$ s  **$R_{SOURCE+} < 1.5k\Omega$  and  $C1 < 20pF$  will provide adequate settling time.**

### “–” Input Settling

At the end of the sample phase the input capacitor switches to the “–” input and the conversion starts (see Figure 8). During the conversion, the “+” input voltage is effectively “held” by the sample and hold and will not affect the conversion result. It is critical that the “–” input voltage be free of noise and settle completely during the first CLK cycle of the conversion. Minimizing  $R_{SOURCE-}$  and  $C2$  will improve settling time. If large “–” input source resistance must be used the time can be extended by using a slower CLK frequency. At the maximum CLK frequency of 1MHz,  **$R_{SOURCE-} < 250\Omega$  and  $C2 < 20pF$  will provide adequate settling.**

### Input Op Amps

When driving the analog inputs with an op amp it is important that the op amp settles within the allowed time (see Figure 8). Again the “+” and “–” input sampling times can be extended as described above to accommodate slower op amps. Most op amps including the LT1006 and LT1013 single supply op amps can be made to settle

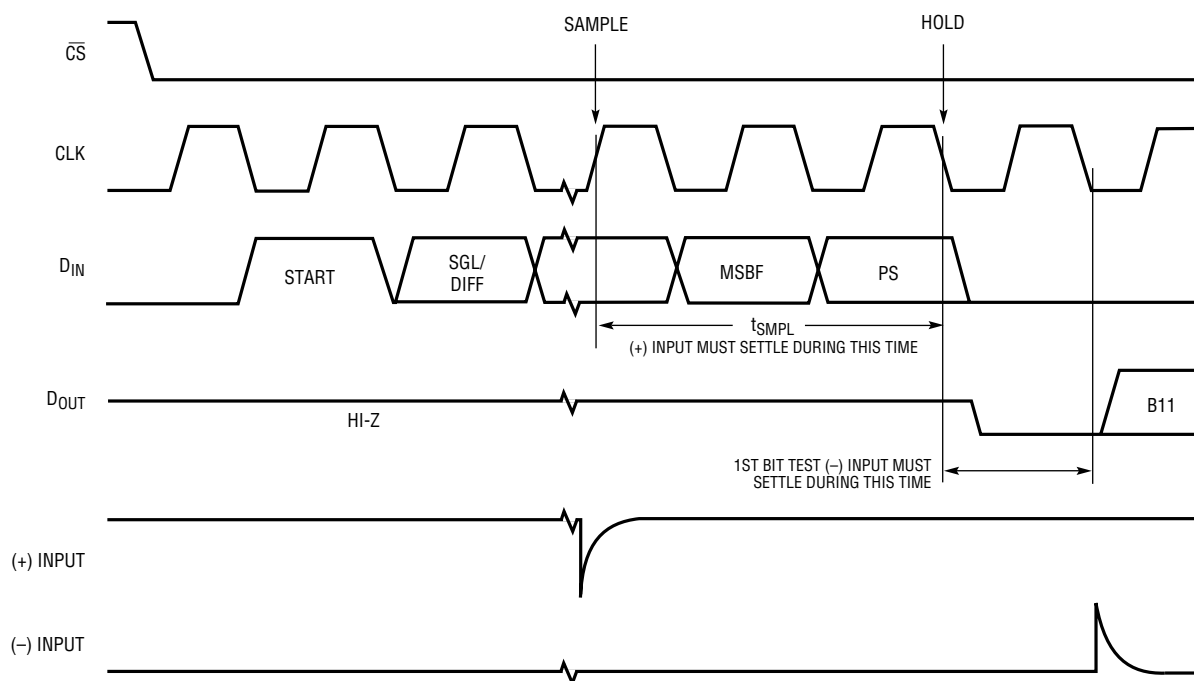


Figure 8. “+” and “–” Input Settling Windows

LTC1293 F08

## APPLICATIONS INFORMATION

within the minimum settling windows of  $2.5\mu\text{s}$  (“+” input) and  $1\mu\text{s}$  (“-” input) that occurs at the maximum clock rate of 1MHz. Figures 9 and 10 show examples of adequate and poor op amp settling.




Figure 9. Adequate Settling of Op Amp Driving Analog Input




Figure 10. Poor Op Amp Settling Can Cause A/D Errors

### RC Input Filtering

It is possible to filter the inputs with an RC network as shown in Figure 11. For large values of  $C_F$  (e.g.,  $1\mu\text{F}$ ) the capacitive input switching currents are averaged into a net DC current. A filter should be chosen with a small resistor and large capacitor to prevent DC drops across the resistor. The magnitude of the DC current is approximately  $I_{DC} = 100\text{pF} \times V_{IN}/t_{CYC}$  and is roughly proportional to  $V_{IN}$ . When running at the minimum cycle time of  $21.5\mu\text{s}$ , the input current equals  $23\mu\text{A}$  at  $V_{IN} = 5\text{V}$ . Here a filter resistor of  $5\Omega$  will cause 0.1LSB of full-scale error. If a larger filter resistor must be used, errors can be reduced by increasing

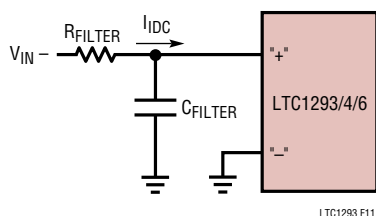


Figure 11. RC Input Filtering

the cycle time as shown in the typical performance characteristic curve Maximum Filter Resistor vs Cycle Time.

### Input Leakage Current

Input leakage currents also can create errors if the source resistance gets too large. For example, the maximum input leakage specification of  $1\mu\text{A}$  (at  $125^\circ\text{C}$ ) flowing through a source resistance of  $1\text{k}\Omega$  will cause a voltage drop of 1mV or 0.8LSB. This error will be much reduced at lower temperatures because leakage drops rapidly (see typical performance characteristic curve Input Channel Leakage Current vs Temperature).

## SAMPLE AND HOLD

### Single-Ended Input

The LTC1293/4/6 provides a built-in sample and hold (S&H) function for all signals acquired in the single-ended mode (COM pin grounded). The sample and hold allows the LTC1293/4/6 to convert rapidly varying signals (see typical performance characteristic curve of S&H Acquisition Time vs Source Resistance). The input voltage is sampled during the  $t_{SAMPL}$  time as shown in Figure 8. The sampling interval begins as the bit preceding the MSBF bit is shifted in and continues until the falling edge of the PS bit is received. On this falling edge the S&H goes into the hold mode and the conversion begins.

### Differential Input

With a differential input the A/D no longer converts a single voltage but converts the difference between two voltages. The voltage on the selected “+” input is sampled and held and can be rapidly time varying. The voltage on the “-” pin must remain constant and be free of noise and ripple throughout the conversion time. Otherwise the differencing operation will not be done accurately. The conversion time is 12 CLK cycles. Therefore a change in the -IN input voltage during this interval can cause conversion errors. For a sinusoidal voltage on the -IN input this error would be:

$$V_{\text{ERROR(MAX)}} = (2\pi f_{(-)} V_{\text{PEAK}}) \left( \frac{12}{f_{\text{CLK}}} \right)$$

Where  $f_{(-)}$  is the frequency of the “-” input voltage,  $V_{\text{PEAK}}$  is its peak amplitude and  $f_{\text{CLK}}$  is the frequency of the CLK.

129346fs

## APPLICATIONS INFORMATION

Usually  $V_{\text{ERROR}}$  will not be significant. For a 60Hz signal on the “–” input to generate a 0.25LSB error (300 $\mu$ V) with the converter running at  $\text{CLK} = 1\text{MHz}$ , its peak value would have to be 66mV. Rearranging the above equation the maximum sinusoidal signal that can be digitized to a given accuracy is given as:

$$f_{(-)\text{MAX}} = \left( \frac{V_{\text{ERROR(MAX)}}}{2\pi V_{\text{PEAK}}} \right) \left( \frac{f_{\text{CLK}}}{12} \right)$$

For 0.25LSB error (300 $\mu$ V) the maximum input sinusoid with a 5V peak amplitude that can be digitized is 0.8Hz.

**Unused inputs should be tied to the ground plane.**

### Reference Input

The voltage on the reference input of the LTC1293/4/6 determines the voltage span of the A/D converter. The reference input has transient capacitive switching currents due to the switched capacitor conversion technique (see Figure 12). During each bit test of the conversion (every CLK cycle) a capacitive current spike will be generated on the reference pin by the A/D. These current spikes settle quickly and do not cause a problem. If slow settling circuitry is used to drive the reference input, take care to insure that transients caused by these current spikes settle completely during each bit test of the conversion.

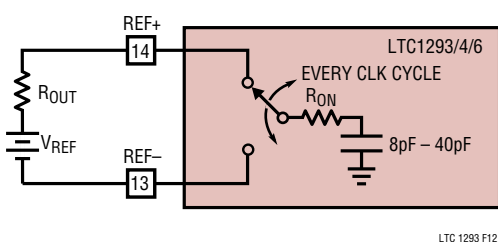


Figure 12. Reference Input Equivalent Circuit

Figure 13 and 14 show examples of both adequate and poor settling. Using a slower CLK will allow more time for the reference to settle. Even at the maximum CLK rate of 1MHz most references and op amps can be made to settle within the 1 $\mu$ s bit time. For example the LT1027 will settle adequately or with a 10 $\mu$ F bypass capacitor at  $V_{\text{REF}}$  the LT1021 also can be used.




Figure 13. Adequate Reference Settling (LT1027)




Figure 14. Poor Reference Settling Can Cause A/D Errors

### Reduced Reference Operation

The effective resolution of the LTC1293/4/6 can be increased by reducing the input span of the converter. The LTC1293/4/6 exhibits good linearity over a range of reference voltages (see typical performance characteristics curves of Change in Linearity vs Reference Voltage and Change in Gain Error vs Reference Voltage). Care must be taken when operating at low values of  $V_{\text{REF}}$  because of the reduced LSB step size and the resulting higher accuracy requirement placed on the converter. Offset and Noise are factors that must be considered when operating at low  $V_{\text{REF}}$  values. For the LTC1293  $\text{REF}^-$  has been tied to the AGND pin. Any voltage drop from the AGND pin to the ground plane will cause a gain error.

### Offset with Reduced $V_{\text{REF}}$

The offset of the LTC1293/4/6 has a larger effect on the output code when the A/D is operated with a reduced reference voltage. The offset (which is typically a fixed voltage) becomes a larger fraction of an LSB as the size of the LSB is reduced. The typical performance characteristic curve of Unadjusted Offset Error vs Reference Voltage shows how offset in LSB's is related to reference voltage for a typical value of  $V_{\text{OS}}$ . For example a  $V_{\text{OS}}$  of 0.1mV, which is 0.1LSB with a 5V reference becomes 0.4LSB with

## APPLICATIONS INFORMATION

a 1.25 reference. If this offset is unacceptable, it can be corrected digitally by the receiving system or by offsetting the “–” input to the LTC1293/4/6.

### Noise with Reduced $V_{REF}$

The total input referred noise of the LTC1293/4/6 can be reduced to approximately 200 $\mu$ V peak-to-peak using a ground plane, good bypassing, good layout techniques and minimizing noise on the reference inputs. This noise is insignificant with a 5V reference input but will become a larger fraction of an LSB as the size of the LSB is reduced. The typical performance characteristic curve of Noise Error vs Reference Voltage shows the LSB contribution of this 200 $\mu$ V of noise.

For operation with a 5V reference, the 200 $\mu$ V noise is only 0.16LSB peak-to-peak. Here the LTC1293/4/6 noise will contribute virtually no uncertainty to the output code. For reduced references, the noise may become a significant fraction of an LSB and cause undesirable jitter in the output code. For example, with a 1.25V reference, this 200 $\mu$ V noise is 0.64LSB peak-to-peak. This will reduce the range of input voltages over which a stable output code can be achieved by 0.64LSB. Now averaging readings may be necessary.

This noise data was taken in a very clean test fixture. Any setup induced noise (noise or ripple on  $V_{CC}$ ,  $V_{REF}$  or  $V_{IN}$ ) will add to the internal noise. The lower the reference voltage used, the more critical it becomes to have a noise-free setup.

### Gain Error due to Reduced $V_{REF}$

The gain error of the LTC1294/6 is very good over a wide range of reference voltages. The error component that is seen in the typical performance characteristics curve Change in Gain Error vs Reference Voltage for the LTC1293 is due the voltage drop on the AGND pin from the device to the ground plane. To minimize this error the LTC1293 should be soldered directly onto the PC board. The internal reference point for  $V_{REF}$  is tied to AGND. Any voltage drop in the AGND pin will make the reference voltage, internal to the device, less than what is applied externally (Figure 15). This drop is typically 400 $\mu$ V due to the product of the pin resistance ( $R_{PIN}$ ) and the LTC1293 supply current. For

example, with  $V_{REF} = 1.25$ V this will result in a gain error change of  $-1.0$ LSB from the gain error measured with  $V_{REF} = 5$ V.

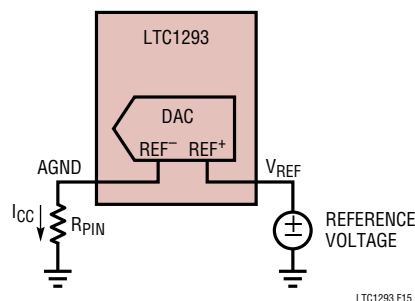


Figure 15. Parasitic Pin Resistance ( $R_{PIN}$ )

### LTC1293/4/6 AC Characteristics

Two commonly used figures of merit for specifying the dynamic performance of the A/Ds in digital signal processing applications are the Signal-to-Noise Ratio (SNR) and the “effective number of bits” (ENOB). SNR is the ratio of the RMS magnitude of the fundamental to the RMS magnitude of all the non-fundamental signals up to the Nyquist frequency (half the sampling frequency). The theoretical maximum SNR for a sine wave input is given by:

$$SNR = (6.02N + 1.76dB)$$


where N is the number of bits. Thus the SNR depends on the resolution of the A/D. For an ideal 12-bit A/D the SNR is equal to 74dB. A Fast Fourier Transform (FFT) plot of the output spectrum of the LTC1294 is shown in Figures 16a and 16b. The input ( $f_{IN}$ ) frequencies are 1kHz and 22kHz with the sampling frequency ( $f_S$ ) at 45.4kHz. The SNR obtained from the plot are 72.7dB and 72.5dB.

Rewriting the SNR expression it is possible to obtain the equivalent resolution based on the SNR measurement.


$$N = \left( \frac{SNR - 1.76dB}{6.02} \right)$$

This is the so-called effective number of bits (ENOB). For the example shown in Figures 16a and 16b,  $N = 11.8$  bits. Figure 17 shows a plot of ENOB as a function of input frequency. The top curve shows the A/D’s ENOB remains at 11.8 for input frequencies up to  $f_S/2$  with  $\pm 5$ V supplies.


## APPLICATIONS INFORMATION

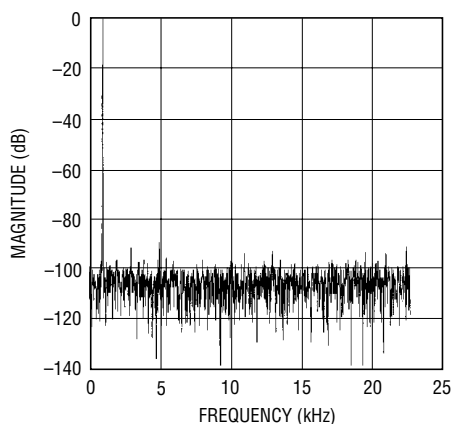


**Figure 16a. LTC1294 FFT Plot**  
 $f_{IN} = 1\text{kHz}$ ,  $f_S = 45.4\text{kHz}$ ,  
 SNR = 72.7dB with  $\pm 5\text{V}$  Supplies

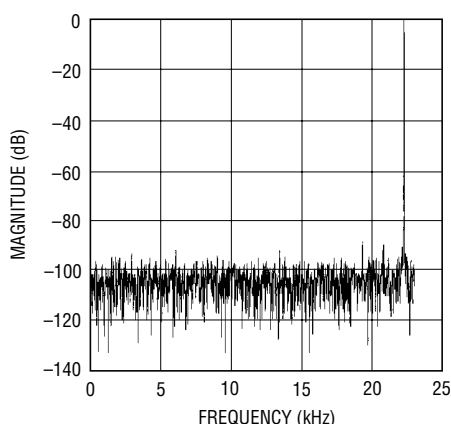

**Figure 16b. LTC1294 FFT Plot**  
 $f_{IN} = 22\text{kHz}$ ,  $f_S = 45.4\text{kHz}$ ,  
 SNR = 72.5dB with  $\pm 5\text{V}$  Supplies

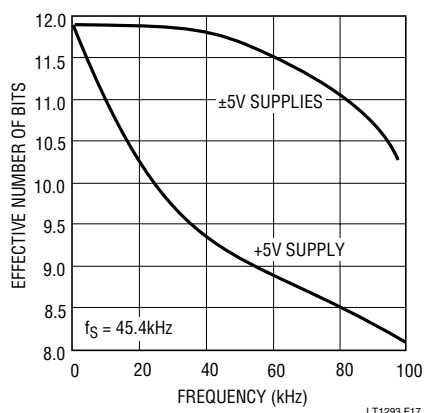

**Figure 17. LTC1294 ENOB vs Input Frequency**

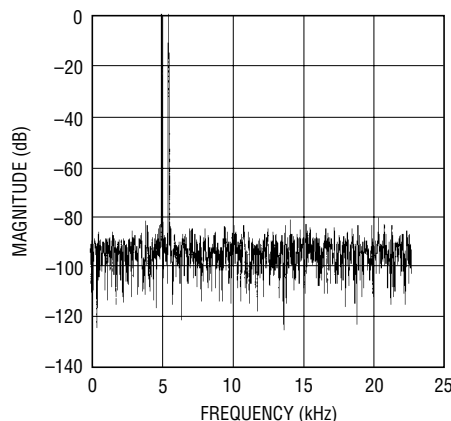

**Figure 18. LTC1294 FFT Plot**  
 $f_{IN1} = 5.1\text{kHz}$ ,  $f_{IN2} = 5.6\text{kHz}$ ,  $f_S = 45.4\text{kHz}$   
 with  $\pm 5\text{V}$  Supplies

For +5V supplies the ENOB decreases more rapidly. This is due predominantly to the 2nd harmonic distortion term.

Figure 18 shows a FFT plot of the output spectrum for two tones applied to the input of the A/D. Nonlinearities in the A/D will cause distortion products at the sum and difference frequencies of the fundamentals and products of the fundamentals. This is classically referred to as intermodulation distortion (IMD).

### Overvoltage Protection

Applying signals to the LTC1293/4/6's analog inputs that exceed the positive supply or that go below  $V^-$  will degrade the accuracy of the A/D and possibly damage the device. For example this condition would occur if a signal is applied to the analog inputs before power is applied to the LTC1293/4/6. Another example is the input source is operating from different supplies of larger value than the LTC1293/4/6. These conditions should be prevented either with proper supply sequencing or by use of external circuitry to clamp or current limit the input source. There are two ways to protect the inputs. In Figure 19 diode clamps from the inputs to  $V_{CC}$  and  $V^-$  are used. The second method is to put resistors in series with the analog inputs for current limiting. As shown in Figure 20a, a  $1\text{k}\Omega$  resistor is enough to stand off  $\pm 15\text{V}$  (15mA for only one channel). If more than one channel exceeds the supplies than the following guidelines can be used. Limit the current to 7mA per channel and 28mA for all channels.

## APPLICATIONS INFORMATION

This means four channels can handle 7mA of input current each. Reducing CLK frequency from a maximum of 1MHz (See typical performance characteristics curves Maximum CLK Frequency vs Source Resistance and Sample and Hold Acquisition Time vs Source Resistance) allows the use of larger current limiting resistors. The “+” input can accept a resistor value of 1k $\Omega$  but the “-” input cannot accept more than 250 $\Omega$  when the maximum clock frequency of 1MHz is used. If the LTC1293/4/6 is clocked at the maximum clock frequency and 250 $\Omega$  is not enough to current limit the “-” input source then the clamp diodes are recommended (Figures 20a and 20b). The reason for the limit on the resistor value is the MSB bit test is affected by the value of the resistor placed at the “-” input (see discussion on Analog Inputs and the typical performance characteristics curve Maximum CLK Frequency vs Source Resistance).

If  $V_{CC}$  and  $V_{REF}$  are not tied together, then  $V_{CC}$  should be turned on first, then  $V_{REF}$ . If this sequence cannot be met connecting a diode from  $V_{REF}$  to  $V_{CC}$  is recommended (see Figure 21).

For dual supplies (bipolar mode) placing two Schottky diodes from  $V_{CC}$  and  $V^-$  to ground (Figure 22) will prevent

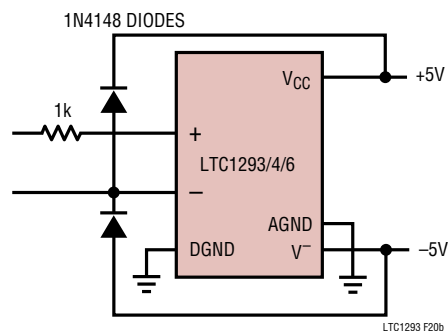


Figure 20b. Overvoltage Protection for Inputs

power supply reversal from occurring when an input source is applied to the analog MUX before power is applied to the device. Power supply reversal occurs, for example, if the input is pulled below  $V^-$ .  $V_{CC}$  will then pull a diode drop below ground which could cause the device not to power up properly. Likewise, if the input is pulled above  $V_{CC}$ ,  $V^-$  will be pulled a diode drop above ground. If no inputs are present on the MUX, the Schottky diodes are not required if  $V^-$  is applied first then  $V_{CC}$ .

Because a unique input protection structure is used on the digital input pins, the signal levels on these pins can exceed the device  $V_{CC}$  without damaging the device.

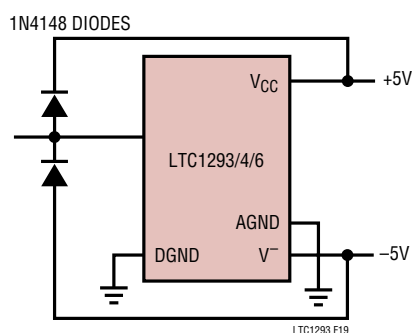


Figure 19. Overvoltage Protection for Inputs

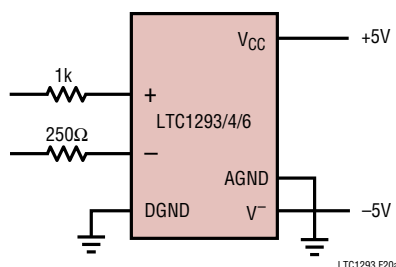


Figure 20a. Overvoltage Protection for Inputs

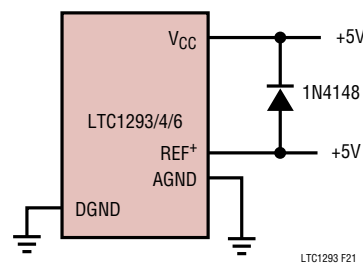


Figure 21

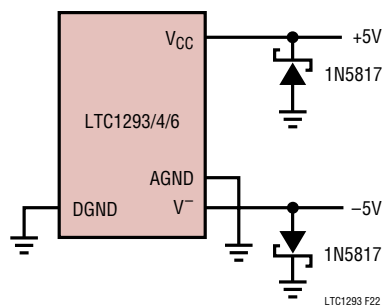


Figure 22. Power Supply Reversal

## APPLICATIONS INFORMATION

### A “Quick Look” Circuit for the LTC1294/6

Users can get a quick look at the function and timing of the LTC1294/6 by using the following simple circuit (Figure 23).  $V_{REF}$  is tied to  $V_{CC}$ .  $D_{IN}$  is tied high which means  $V_{IN}$  should be applied to the CH7 with respect to COM. A

Unipolar conversion is requested and the data is output MSB first.  $\overline{CS}$  is driven at  $1/64$  the clock rate by the CD4520 and  $D_{OUT}$  outputs the data. The output data from the  $D_{OUT}$  pin can be viewed on an oscilloscope that is set up to trigger on the falling edge of  $\overline{CS}$  (Figure 24).


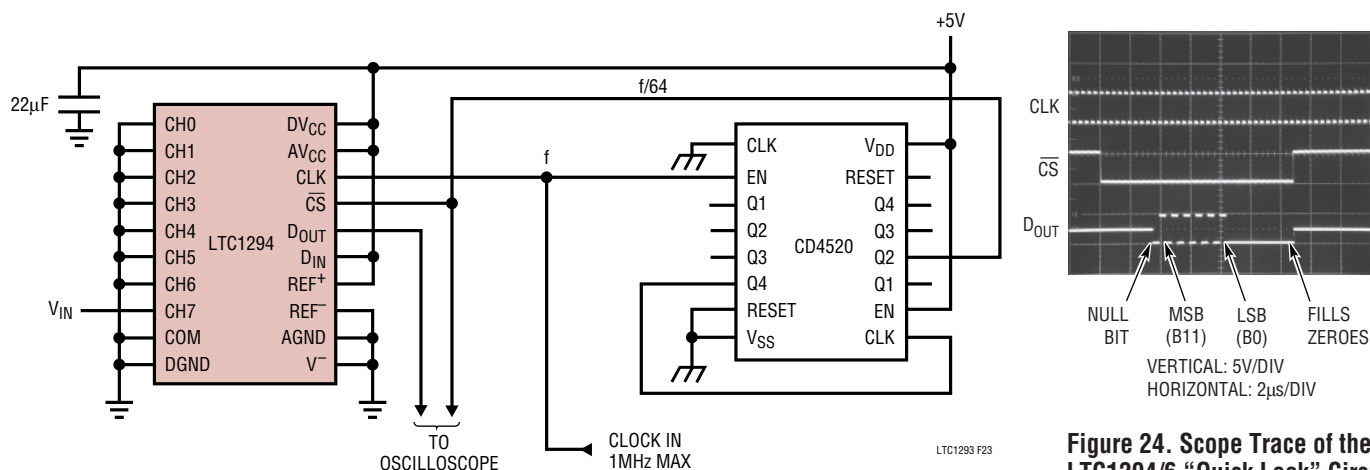


Figure 23. “Quick Look” Circuit for the LTC1294/6

Figure 24. Scope Trace of the LTC1294/6 “Quick Look” Circuit Showing A/D Output 1010101010 (AAA<sub>HEX</sub>)


## TYPICAL APPLICATIONS

### Digitally Linearized Platinum RTD Signal Conditioner

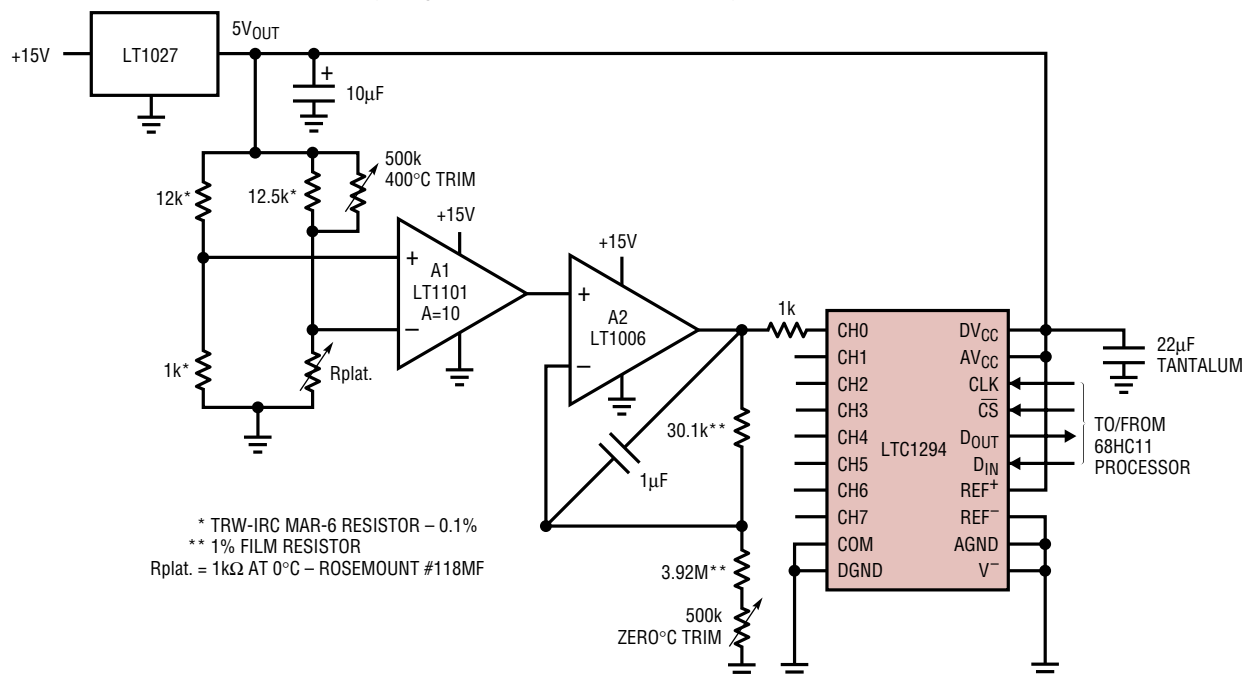

## TYPICAL APPLICATIONS


## Micropower, 5000V Opto-Isolated, Multichannel, 12-Bit Data Acquisition System is Accessed Once Every Two Seconds

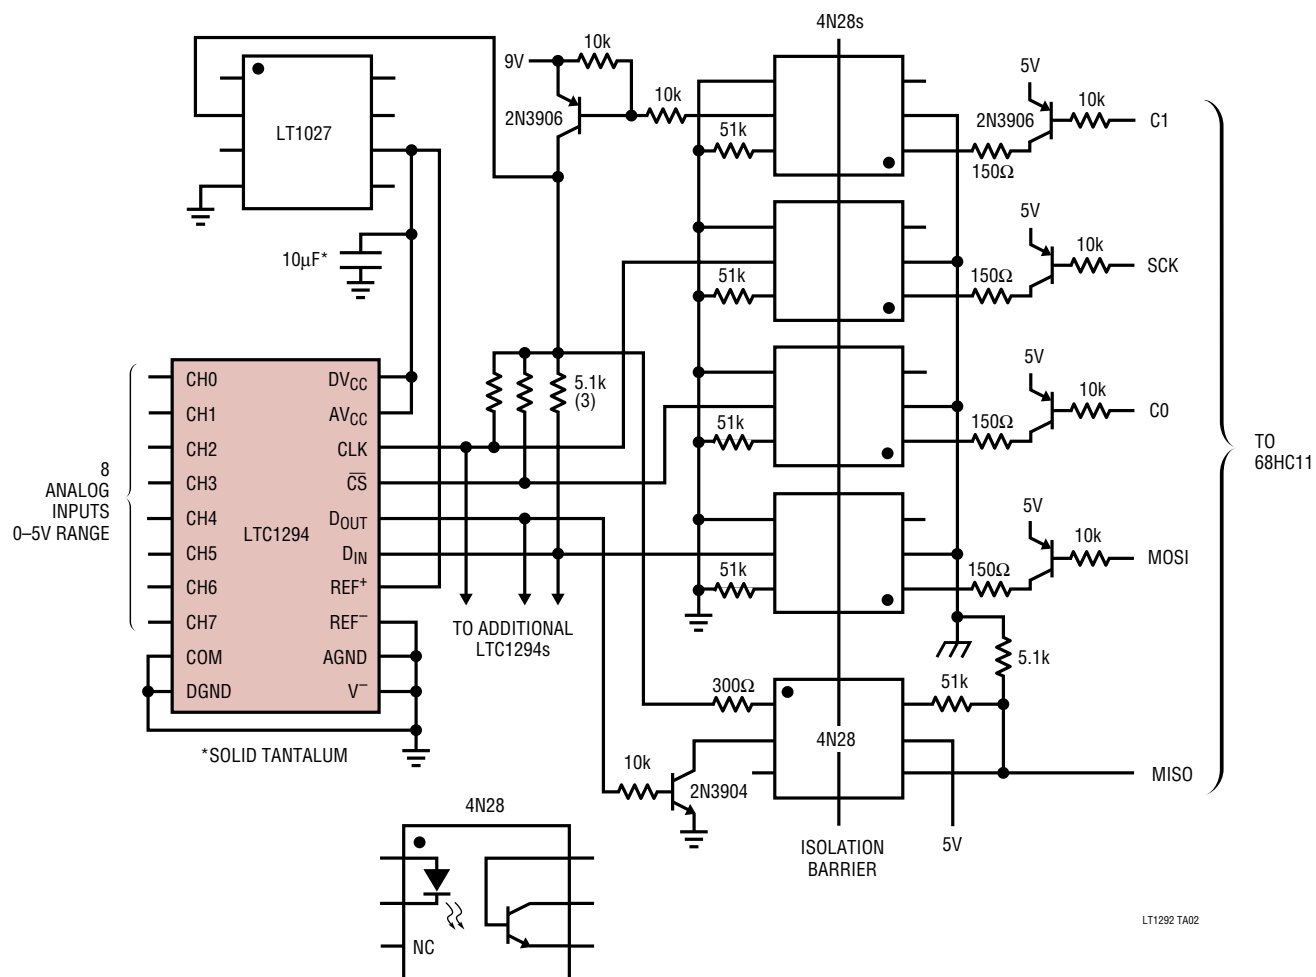

# PACKAGE DESCRIPTION


Dimensions in inches (millimeters) unless otherwise noted.

## J Package 20-Lead Ceramic DIP

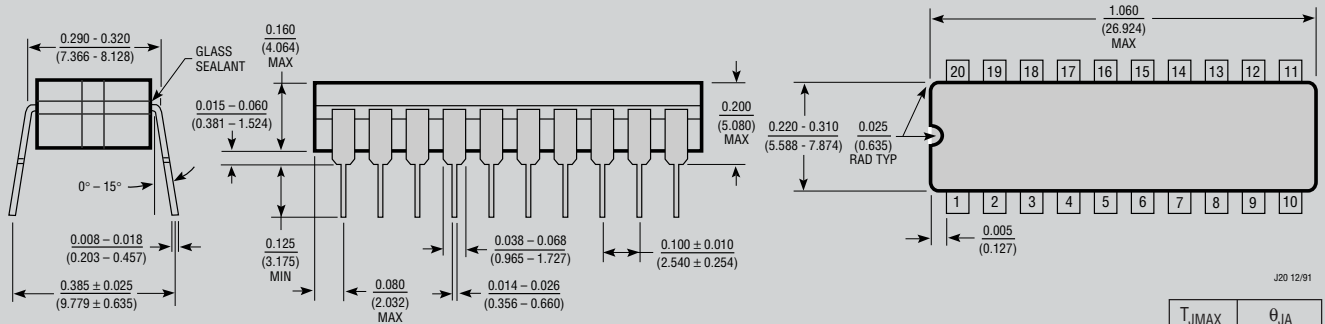


## OBSOLETE PACKAGE

## N Package 16-Lead Plastic DIP

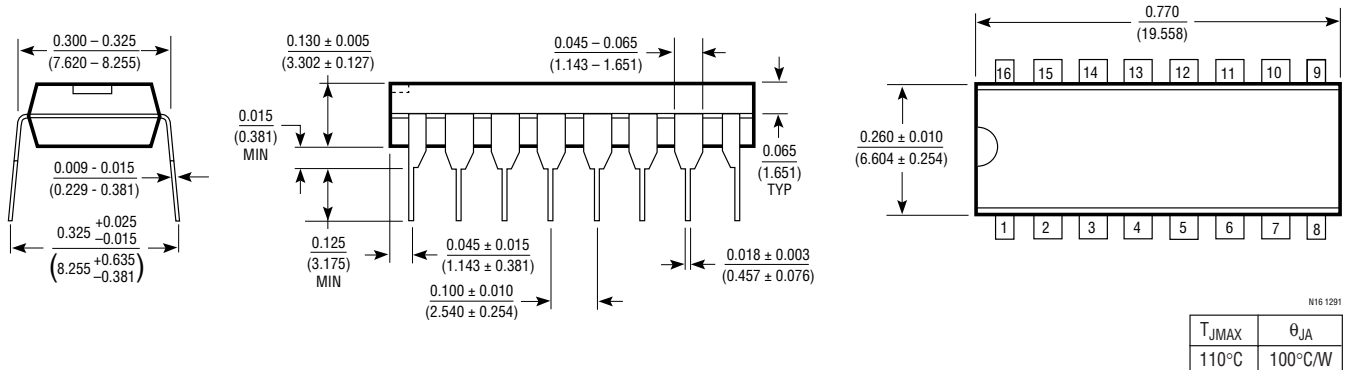


## N Package 20-Lead Plastic DIP

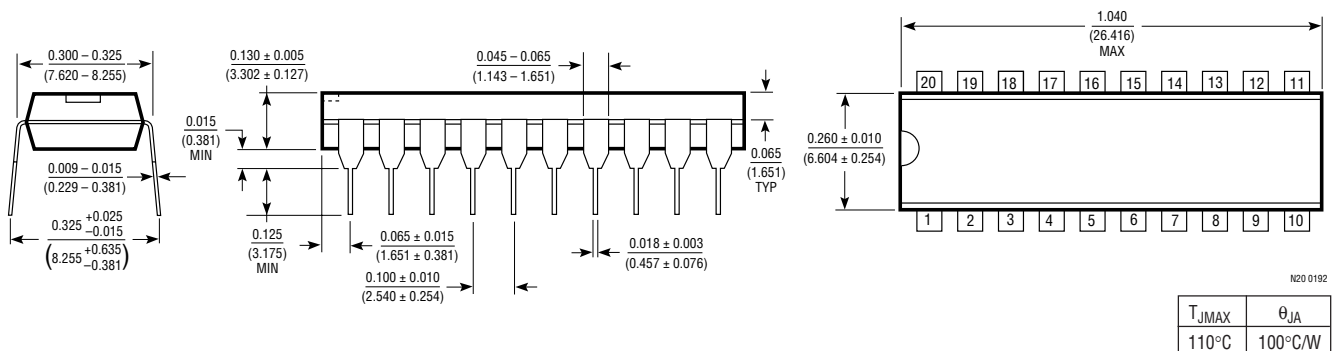


PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

S Package  
16-Lead Plastic SOL

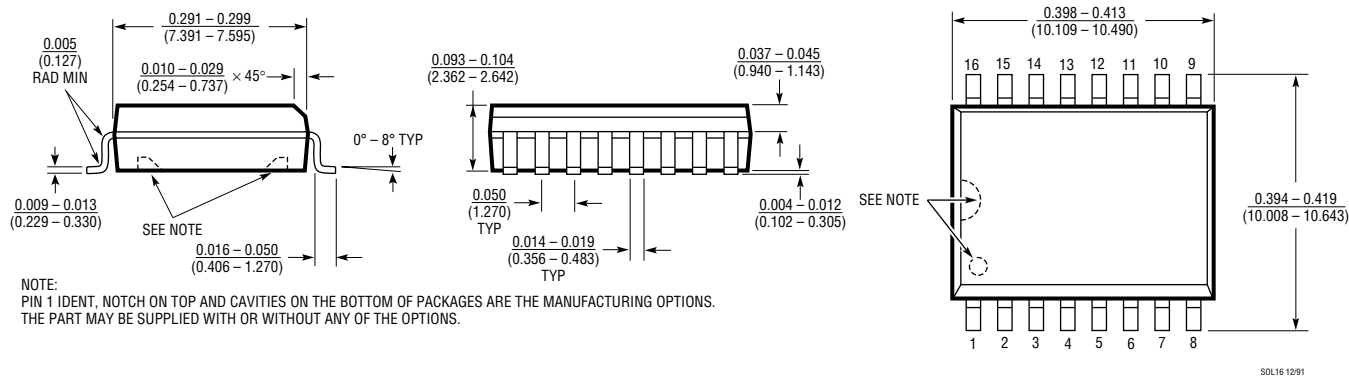

| T <sub>JMAX</sub> | θ <sub>JA</sub> |
|-------------------|-----------------|
| 110°C             | 150°C/W         |

S Package  
20-Lead Plastic SOL

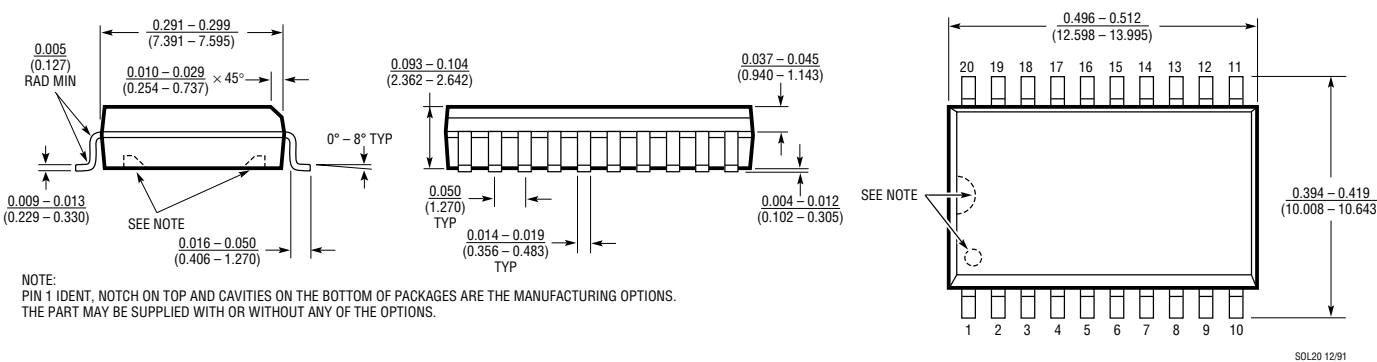

| T <sub>JMAX</sub> | θ <sub>JA</sub> |
|-------------------|-----------------|
| 110°C             | 150°C/W         |