
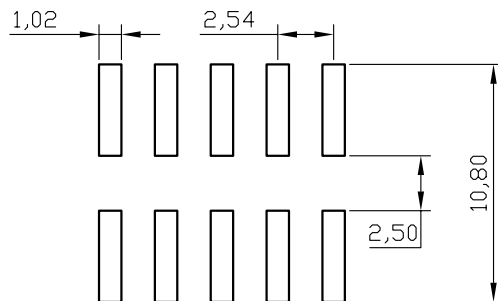
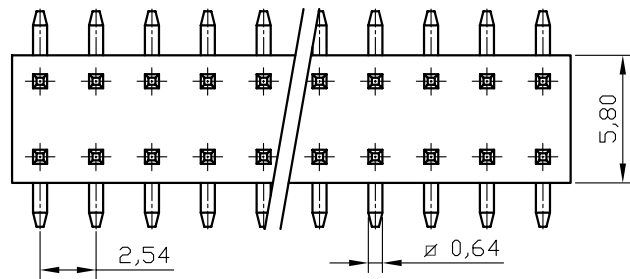



| REV | ECN. NO. | APP | DATE |
|-----|----------------|-----|------|
| A | EDIÇÃO INICIAL | | |
| | | | |
| | | | |

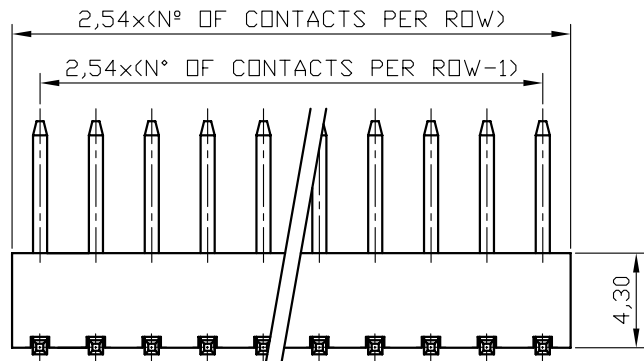

RECOMMENDED P.C. BOARD LAYOUT

SPECIFICATIONS

Current Rating: 3Amp
 Dielectric Withstanding: 600V AC/DC
 Temperature Range: -40°C to +105°C
 Contact Resistance: 20mΩ max.
 Insulation Resistance: 1000MΩ min.

HOW TO ORDER: PIN[][D][R][]SD[L][R] 1 2 3 4 5 6

- 1- Nr. of Ways
Double Row: 2 to 80
- 2- Row Version:
(D)-Double Row
- 3- Pin Style
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(F)-FLASH Au
(A)-0,38um Au
(B)-0,76um Au
(C)-0,38um Au/Sn
(D)-0,76um Au/Sn
- 5- Profile:
(L)-4,30mm
- 6-(R) RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

| | | | |
|--------|----------|---------------------------|-----------|
| 0.0± | SCALE | TITLE | DATE |
| 0.00± | UNIT mm | 2,54mm PIN HEADER HEIGHT | JUNE 2007 |
| 0.000± | | 4,3mm 180° SMT DOUBLE ROW | APP. BY |
| | MATL | CHK. BY | |
| | DWG. NO. | DR. BY | DINO |