
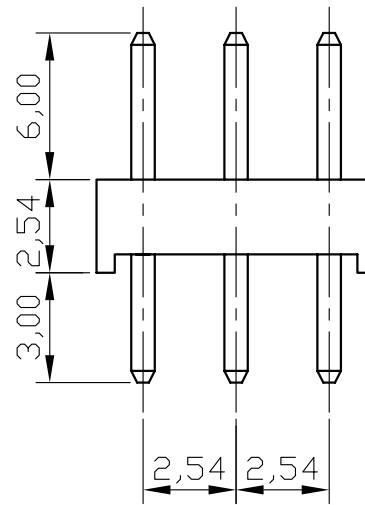


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	REV. OPÇÕES DE EMBALAGENS		12/2010

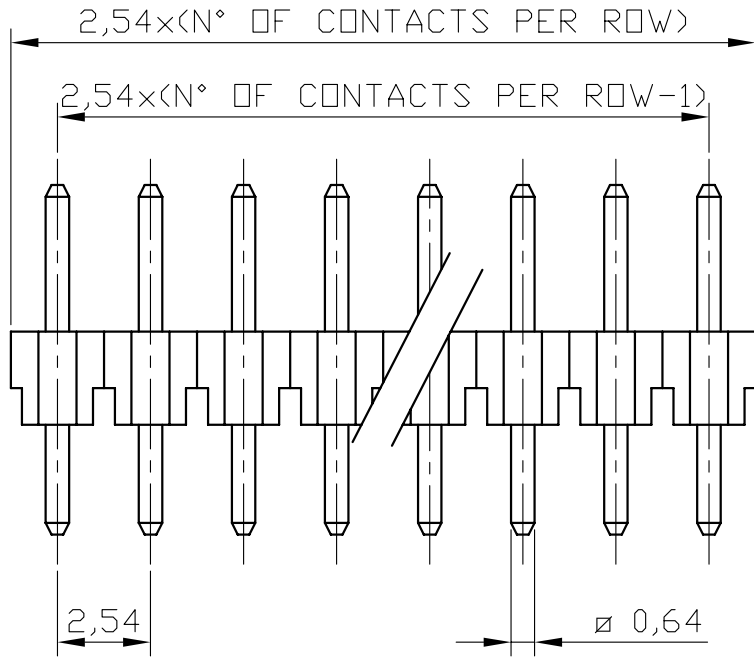

#### SPECIFICATIONS

Current Rating: 3 Amps  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)

#### MATERIAL

Contact: Brass  
 Insulator Material: PBT  
 Color: Black

### HOW TO ORDER: PIN[ ][T][R][ ][S][ ][R] 1 2 3 4 5 6

- |  |  |
|--|--|
| 1- Nr. of Ways<br>Triple row: 3 to 120 | 4- Terminal Plating:<br>(E)-Sn<br>(F)-FLASH Au<br>(A)-0,38um Au<br>(B)-0,76um Au<br>(C)-0,38um Au/Sn<br>(D)-0,76um Au/Sn |
| 2- Row Version:<br>(T)-Triple Row      |  |
| 3- Pin Style<br>(N)-90°<br>(R)-180°    | 5- Options:<br>(T)-Tube Packing  |
|  | 6- (R) RoHS Compliant  |



**MATRIX Tecnologia Ind. e Com. Ltda.**

0.0±	SCALE	TITLE	DATE	DECEMBER 2010
0.00±		2,54mm PIN HEADER HEIGHT		
0.000±	UNIT mm	2,54mm 180° TRIPLE ROW	APP. BY	
		MATL	CHK. BY	
		DWG. NO.	DR. BY	Gabriel Zandoná