



REV/	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
A	REV. OPÇÕES DE EMBALAGENS		12/2010

**SPECIFICATIONS**

Current Rating: 3 Amps  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)

**MATERIAL**

Contact: Brass  
 Insulator Material: PBT  
 Color: Black

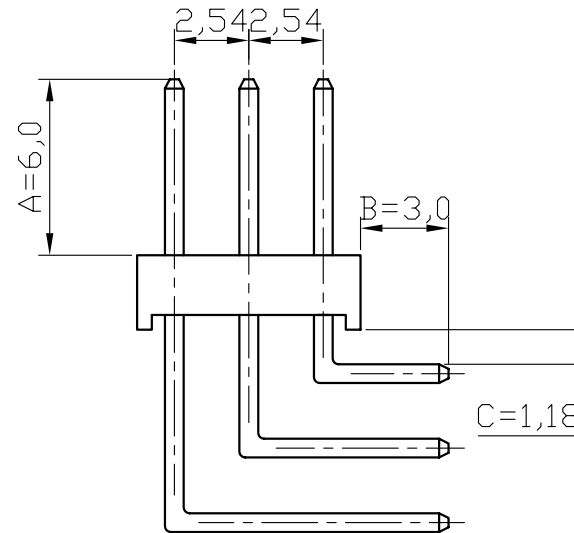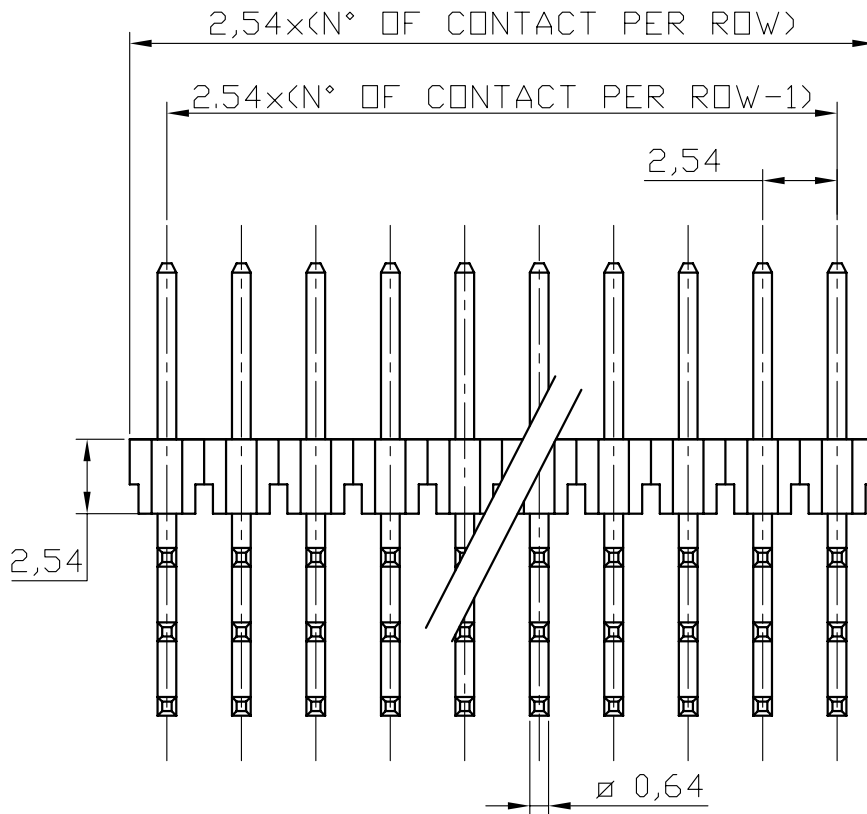

**HOW TO ORDER:**  
**PIN[ ] [T] [N] [ ] [S] [ ] [R]**  
**1 2 3 4 5**

- 1- Nr. of Ways  
Triple row: 3 to 120
- 2- Row Version:  
(T)-Triple Row
- 3- Pin Style  
(N)-90°  
(R)-180°
- 4- Terminal Plating:  
(E)-Sn  
(F)-FLASH Au  
(A)-0,38um Au  
(B)-0,76um Au  
(C)-0,38um Au/Sn  
(D)-0,76um Au/Sn
- 5- Options:  
(T)-Tube Packing  
6- (R) RoHS Compliant



**MATRIX Tecnologia Ind. e Com. Ltda.**

0.0±	SCALE	TITLE	DATE	DECEMBER 2010
0.00±	UNIT mm	2,54mm PIN HEADER HEIGHT	APP. BY	
0.000±		2,54mm 90° TRIPLE ROW		
		MATL	CHK. BY	
		DWG. NO.	DR. BY Gabriel Zandoná	