
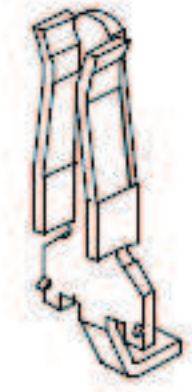
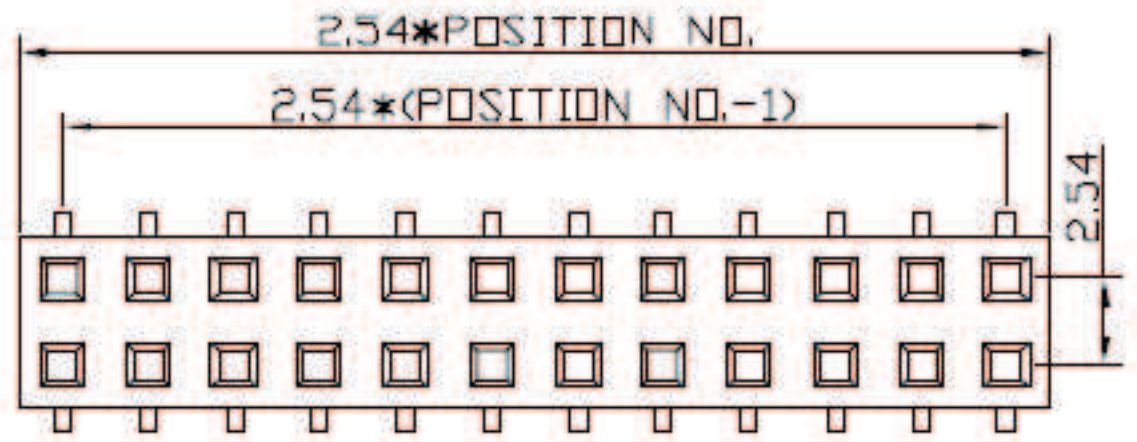
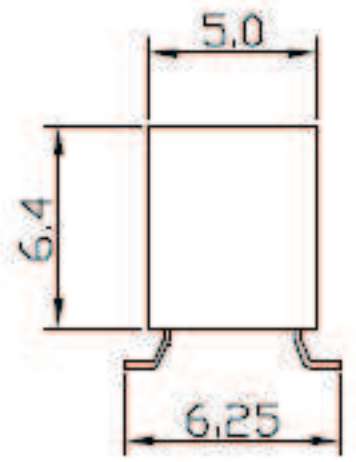


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

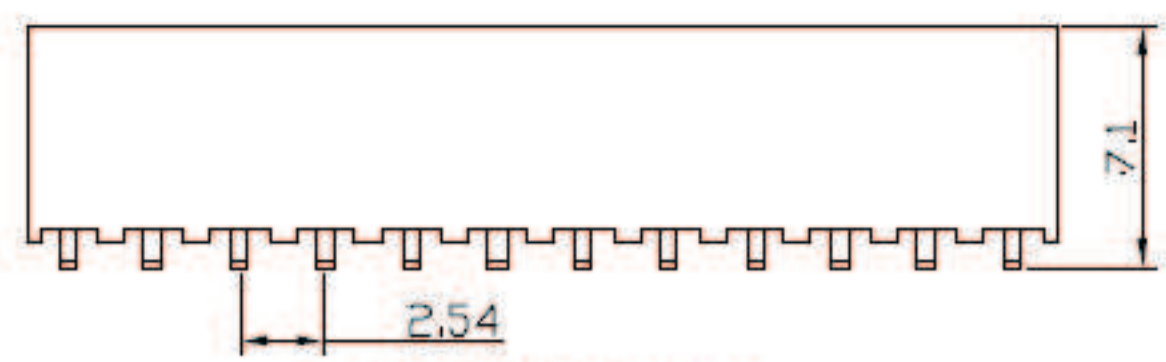


SPECIFICATIONS

Electrical
 Current Rating: 1 Amp
 Contact Resistance: 30 m ohm max.
 Insulation Resistance: 3000 Mohm min.
 Dielectric Withstanding Voltage: 500V AC for 1 Minute
 Operate Temperature: -40°C to +105°C

HOW TO ORDER:
MAT[][D][R][]S[F]D[][R]
1 2 3 4 5 6 7

- 1- Nr. of Ways:
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (D)-Double Row
- 3- Pin Style:
 (N)-90°
 (R)-180°
- 4- Terminal Plating:
 (E)-Sn
 (F)-Flash Au
 (A)-0,38µm Au
 (B)-0,76µm Au
 (C)-0,38µm Au/Sn
 (D)-0,76µm Au/Sn
- 5- Profile:
 (F)-6,4mm
- 6- Option:
 (T)-Tube Packing
 (R)-Reel Packing
 (C)-Cap+Tube
 (Q)-Cap+Reel
- 7-(R)RoHS Compliant

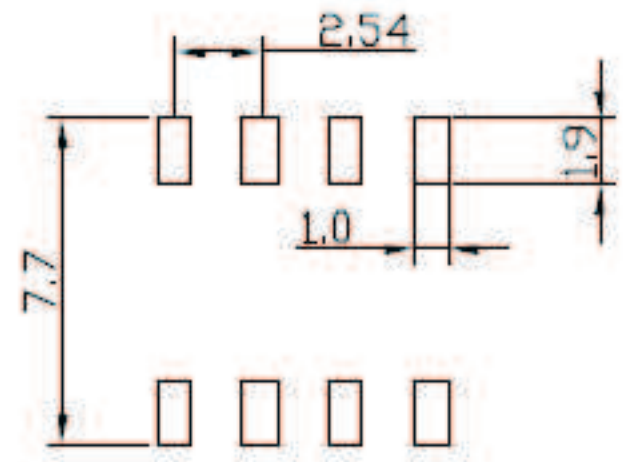

P.C.B. LAYOUT

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE 2.54mm FEMALE HEADER SMD TYPE H=6.4mm	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego