
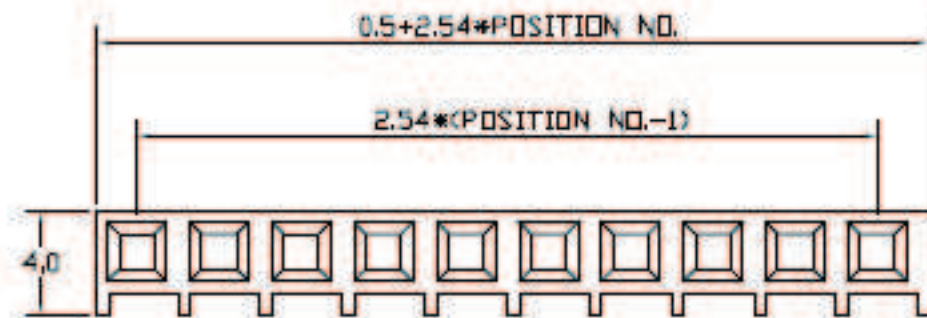
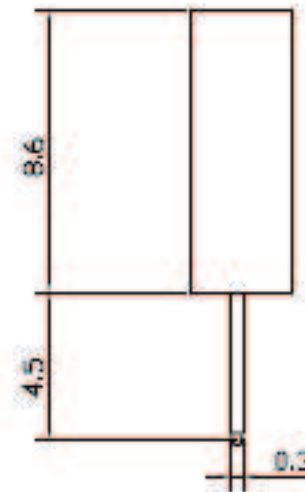


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	CÓD. ANT. : MAT [][S][R][]S8.6W[R]		01/2012

SPECIFICATIONS

CURRENT RATING
 1 AMP DC
 CONTACT RESISTANCE
 30 MILLIOHM MAX
 INSULATION RESISTANCE
 1000 MEGOHM MIN
 DIELECTRIC VOLTAGE
 500V AC FOR ONE MINUTE
 OPERATING TEMPERATURE
 -40°C TO 105°C

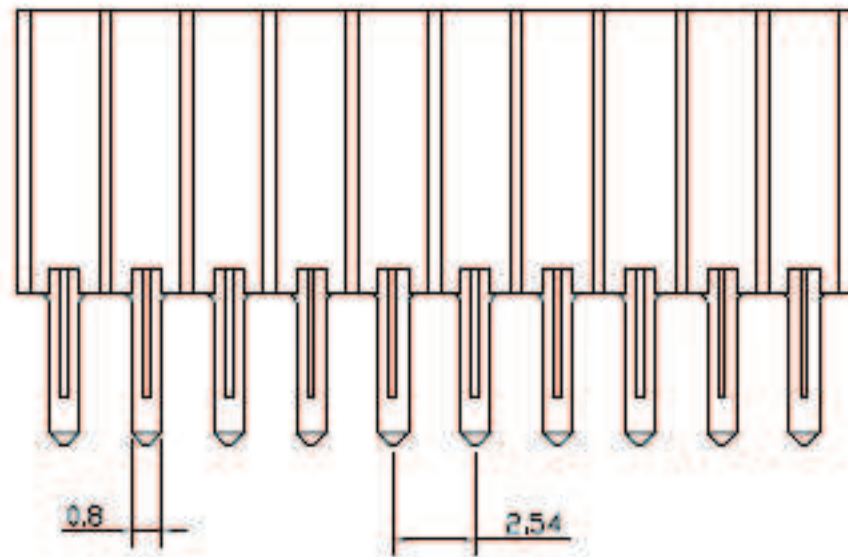

HOW TO ORDER: MATW [][S][R][]S[S1][R]



1 2 3 4 5 6

- | | | |
|---|--|--|
| 1 - Nr. of Ways:
Single Row: 1 to 40
Double Row: 2 to 80 | 4 - Terminal Plating:
(E) - Sn
(D) - Flash Au
(F) - 0,38um Au
(G) - 0,76um Au
(C) - 0,38um Au/Sn
(H) - 0,76um Au/Sn | 5 - Profile:
(S1) - 8,6mm

6 - (R) RoHS Compliant |
| 2 - Row Version:
(S) - Single Row
(D) - Double Row | | |
| 3 - Pin Style:
(N) - Right Angle (90°)
(R) - Straight (180°) | | |

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE	DATE September 2007
TOLERANCE: ±0.25		P:2.54mm FEMALE HEADER PROFILE 8.6mm STRAIGHT	APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	CÓD. ANT.: MAT[][D][R][]S8.6W[R]		01/2012

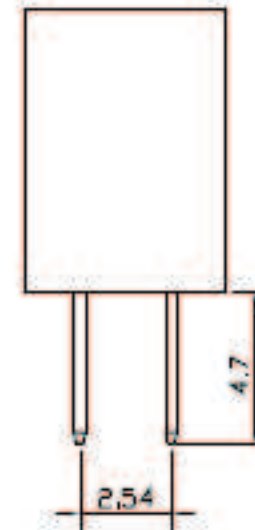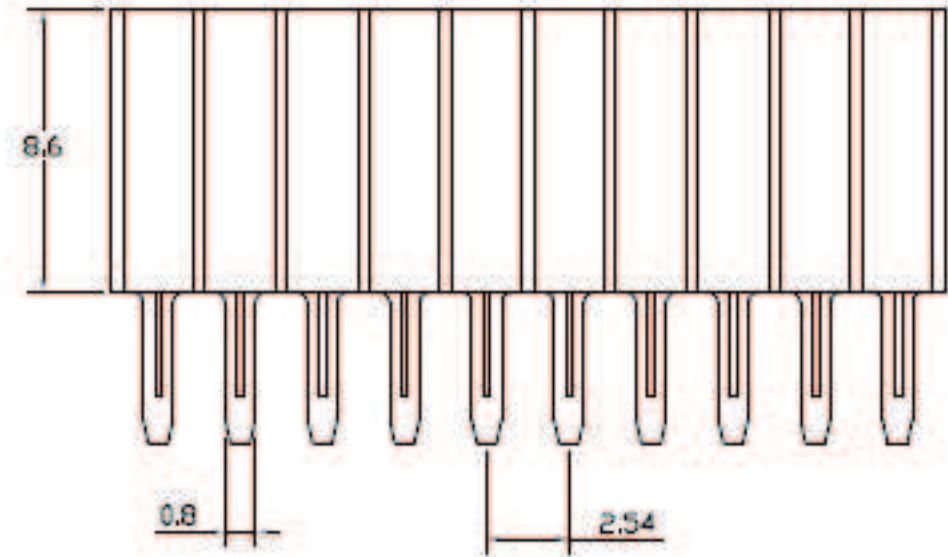

SPECIFICATIONS
CURRENT RATING
 1 AMP DC
CONTACT RESISTANCE
 30 MILLIOHM MAX
INSULATION RESISTANCE
 1000 MEGOHM MIN
DIELECTRIC VOLTAGE
 500V AC FOR ONE MINUTE
OPERATING TEMPERATURE
 -40°C TO 185°C

HOW TO ORDER:
MATW [][D][R][]S[S1][R]
 1 2 3 4 5 6

- 1 - Nr. of Ways:**
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2 - Row Version:**
 (S) - Single Row
 (D) - Double Row
- 3 - Pin Style:**
 (N) - Right Angle (90°)
 (R) - Straight (180°)
- 4 - Terminal Plating:**
 (E) - Sn
 (D) - Flash Au
 (F) - 0,38um Au
 (G) - 0,76um Au
 (C) - 0,38um Au/Sn
 (H) - 0,76um Au/Sn
- 5 - Profile:**
 (S1) - 8,6mm
- 6 - (R) RoHS Compliant**

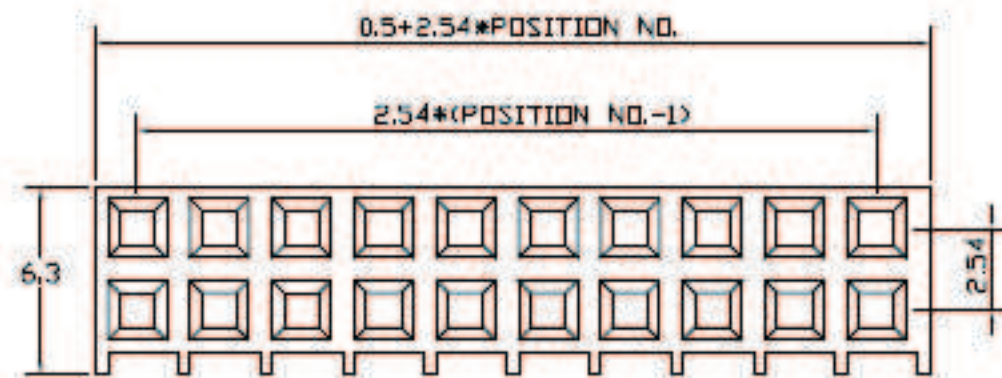

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE 2.54mm FEMALE HEADER HEIGHT 8,6mm 180°	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego