

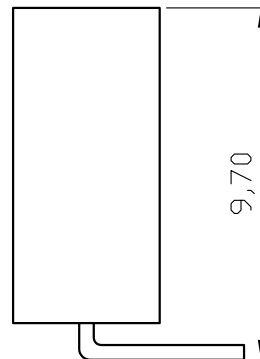


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	CÓD. ANT.: MAT [][S][N][]S8.6W[R]		01/2012

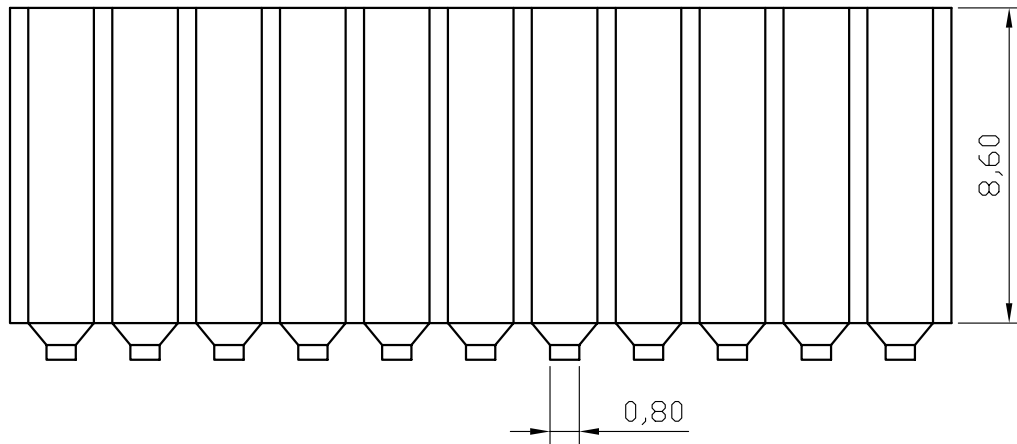

SPECIFICATIONS

Current Rating: 1 Amp DC
 Contact Resistance: 30 MilliΩhm Max.
 Insulation Resistance: 1000 MegΩhm Min.
 Dielectric Voltage: 500V AC for One Minute
 Operating Temperature: -40°C to 105°C

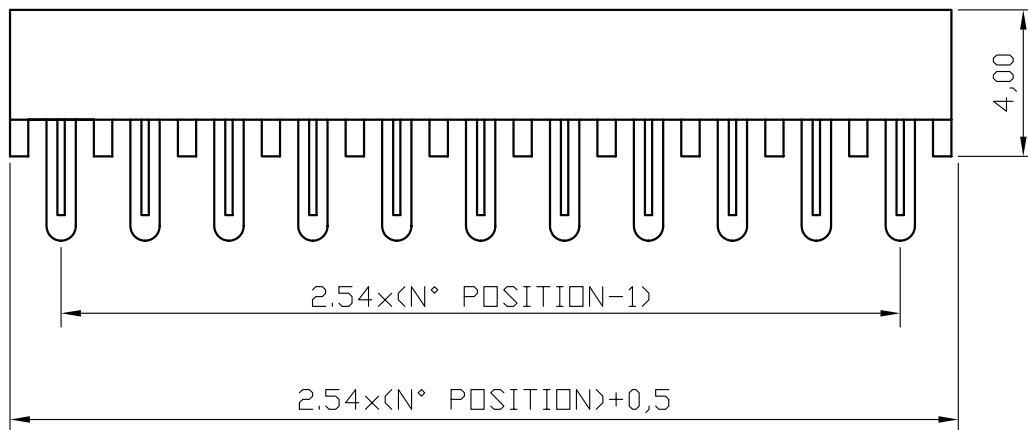

HOW TO ORDER:

MATW [][S][N][]S[S1][R]

1 2 3 4 5 6

1 - Nr. of Ways:

Single Row: 1 to 40
 Double Row: 2 to 80

2 - Row Version:

(S) - Single Row
 (D) - Double Row

3 - Pin Style:

(N) - Right Angle (90°)
 (R) - Straight (180°)

4 - Terminal Plating:

(E) - Sn
 (D) - Flash Au
 (F) - 0,38um Au
 (G) - 0,76um Au
 (C) - 0,38um Au/Sn
 (H) - 0,76um Au/Sn

5 - Profile:

(S1) - 8,6mm

6 - (R) RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 5:1	TITLE 2.54mm WALY FEMALE HEADER SINGLE ROW 90°	DATE JULY 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO