

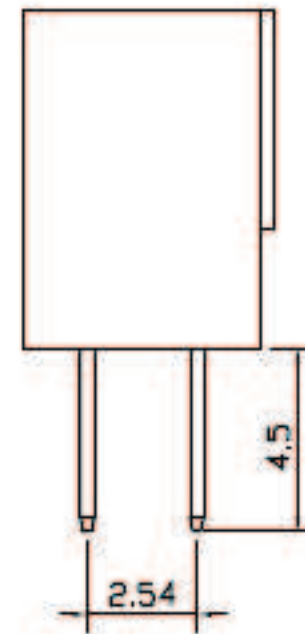


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	CÓD. ANT.: MAT [][D][R][]S8.6C[R]		01/2012

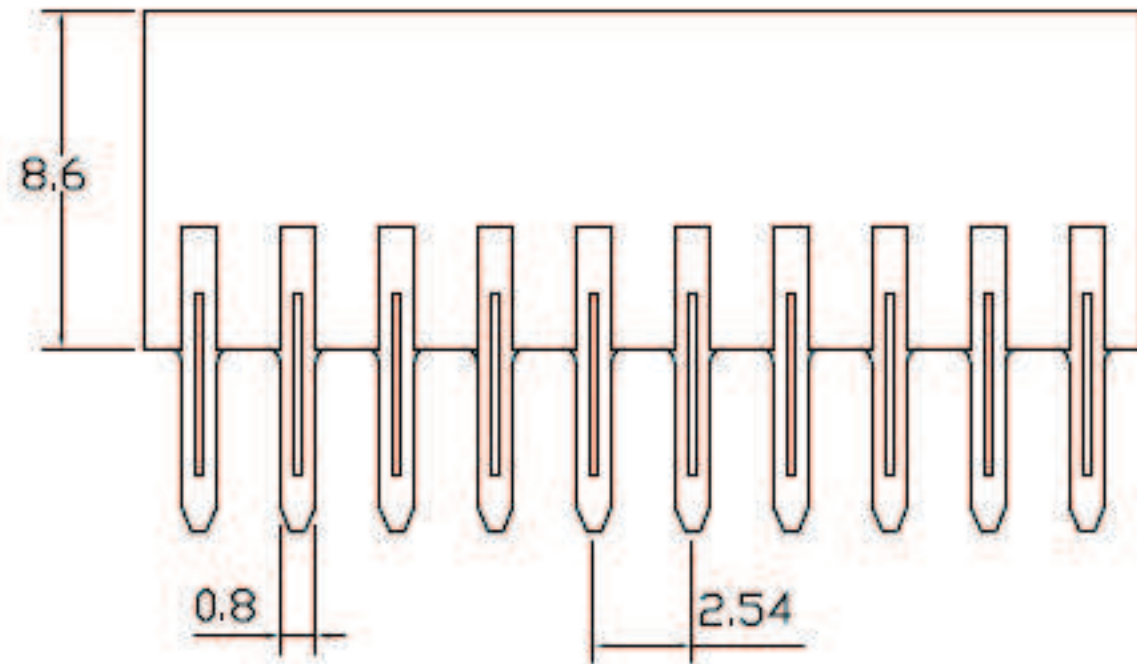

SPECIFICATIONS
 CURRENT RATING
 1 AMP DC
 CONTACT RESISTANCE
 30 MILLIOHM MAX
 INSULATION RESISTANCE
 1000 MEGOHM MIN
 DIELECTRIC VOLTAGE
 500V AC FOR ONE MINUTE
 OPERATING TEMPERATURE
 -40°C TO 105°C

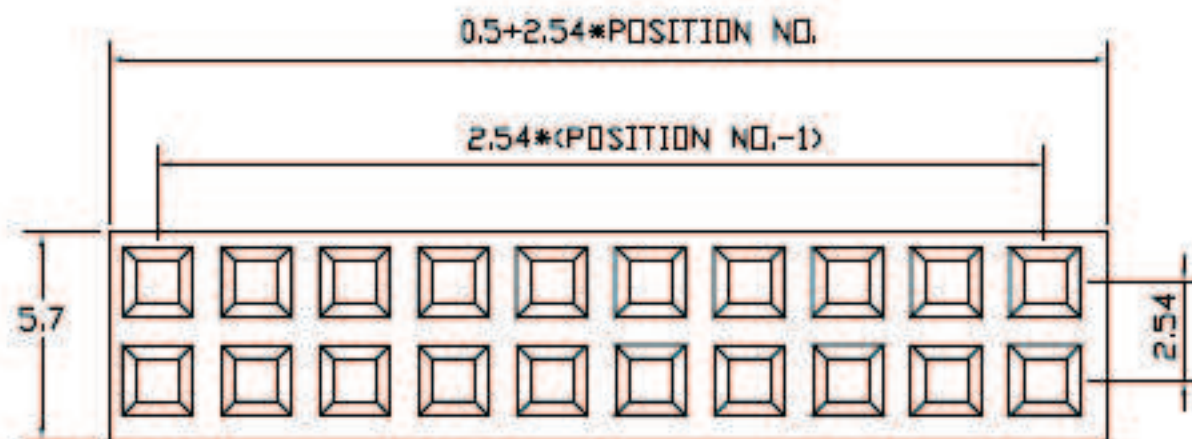

HOW TO ORDER:
 MATC [][D][R][]S[S1][R]
 1 2 3 4 5 6

- 1 - Nr. of Ways:
Double Row: 2 to 80
- 2 - Row Version:
(D) - Double Row
- 3 - Pin Style:
(R) - Straight (180°)
- 4 - Terminal Plating:
(E) - Sn
(D) - Flash Au
(F) - 0,38um Au
(G) - 0,76um Au
(C) - 0,38um Au/Sn
(H) - 0,76um Au/Sn
- 5 - Profile:
(S1) - 8,6mm
- 6 - (R) RoHS Compliant

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE FEMALE HEADER 2.54mm PROFILE 8.6mm CUT SIDE	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego