
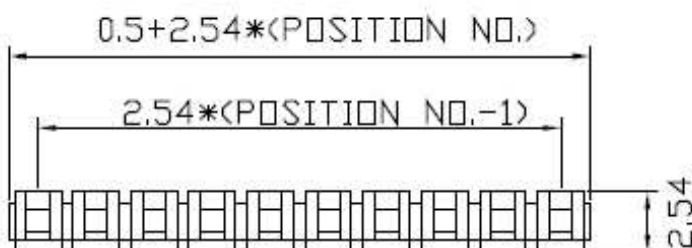



REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	CÓD. ANT. : MAT [ ][S][R][ ][SJ][R]		01/2012

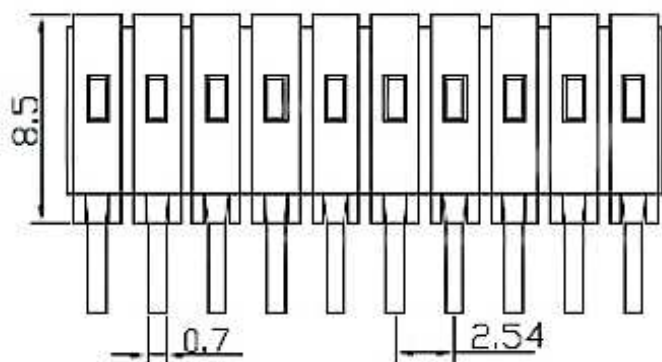

### SPECIFICATIONS

CURRENT RATING  
1 AMP DC

CONTACT RESISTANCE  
30 MILLIOHM MAX.

INSULATION RESISTANCE  
1000 MEGOHM MIN.

DIELECTRIC VOLTAGE  
500V AC FOR ONE MINUTE

OPERATING TEMPERATURE  
-40°C TO 105°C

### HOW TO ORDER: MATJ [ ][S][R][ ][SJ][R]

1 2 3 4 5 6

#### 1 - Nr. of Ways:

Single Row: 1 to 43  
Double Row: 2 to 86

#### 2 - Row Version:

(S) - Single Row  
(D) - Double Row

#### 3 - Pin Style:

(R) - Straight (180°)


#### 4 - Terminal Plating:

(E) - Sn  
(D) - Flash Au  
(F) - 0,38um Au  
(G) - 0,76um Au  
(C) - 0,38um Au/Sn  
(H) - 0,76um Au/Sn


#### 5 - Profile:

(S) - 8,5mm

#### 6 - (R) RoHS Compliant

 <b>MATRIX Tecnologia Ind. e Com. Ltda.</b>		UNIT	SCALE	TITLE	DATE
		mm		2.54mm FEMALE HEADER H=8.5mm SINGLE ROW	September 2007
		TOLERANCE: ±0.25			APP. BY
		MATL			CHK. BY
		DWG. NO.			DR. BY Diego

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	CÓD. ANT. : MAT[ ][D][R][ ][SJ][R]		01/2012

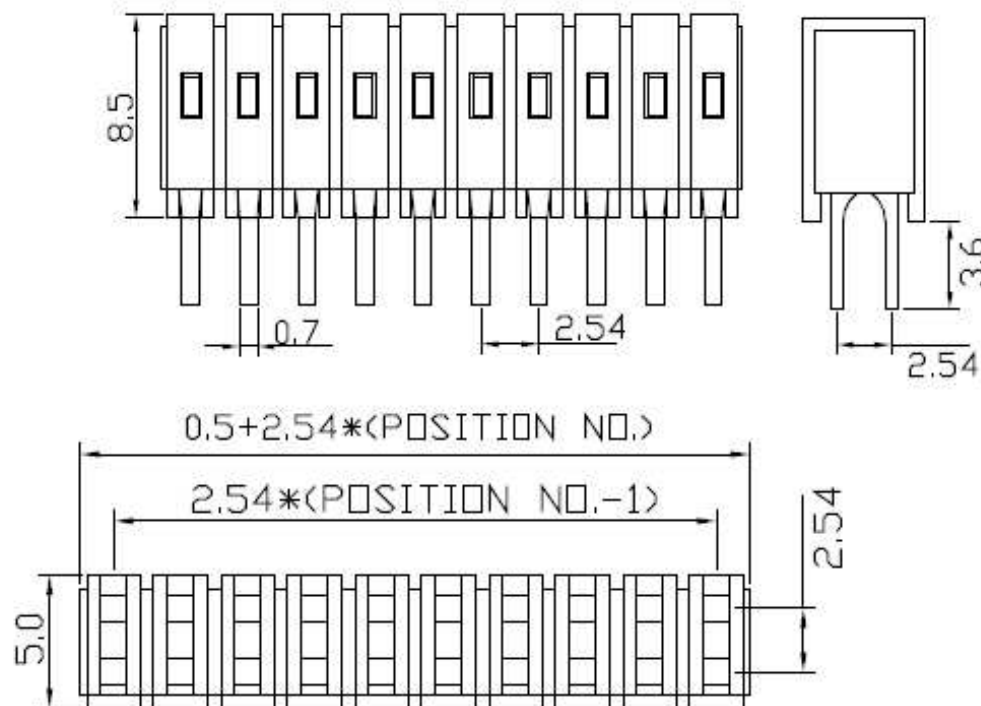

### SPECIFICATIONS

CURRENT RATING  
1 AMP DC

CONTACT RESISTANCE  
30 MILLIOHM MAX.

INSULATION RESISTANCE  
1000 MEGOHM MIN.

DIELECTRIC VOLTAGE  
500V AC FOR ONE MINUTE

OPERATING TEMPERATURE  
-40°C TO 105°C

### HOW TO ORDER: MATJ [ ][D][R][ ][S][ ][R]

1 2 3 4 5 6

#### 1 - Nr. of Ways:

Single Row: 1 to 43  
Double Row: 2 to 86

#### 2 - Row Version:

(S) - Single Row  
(D) - Double Row

#### 3 - Pin Style:

(R) - Straight (180°)

#### 4 - Terminal Plating:

(E) - Sn  
(D) - Flash Au  
(F) - 0,38um Au  
(G) - 0,76um Au  
(C) - 0,38um Au/Sn  
(H) - 0,76um Au/Sn

#### 5 - Profile:

(S) - 8,5mm

#### 6 - (R) RoHS Compliant



**MATRIX Tecnologia Ind. e Com. Ltda.**

UNIT	SCALE	TITLE	DATE
mm		2.54mm FEMALE HEADER H=8.5mm DUAL ROW	September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego