
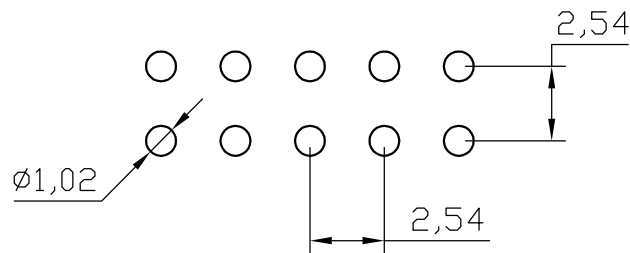
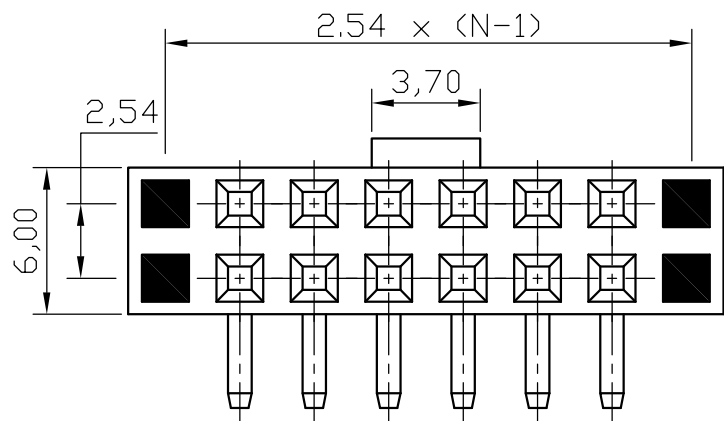


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	CÓD. ANT.: MAT[XX][D][N][X][S][WB][X][R]		01/2012

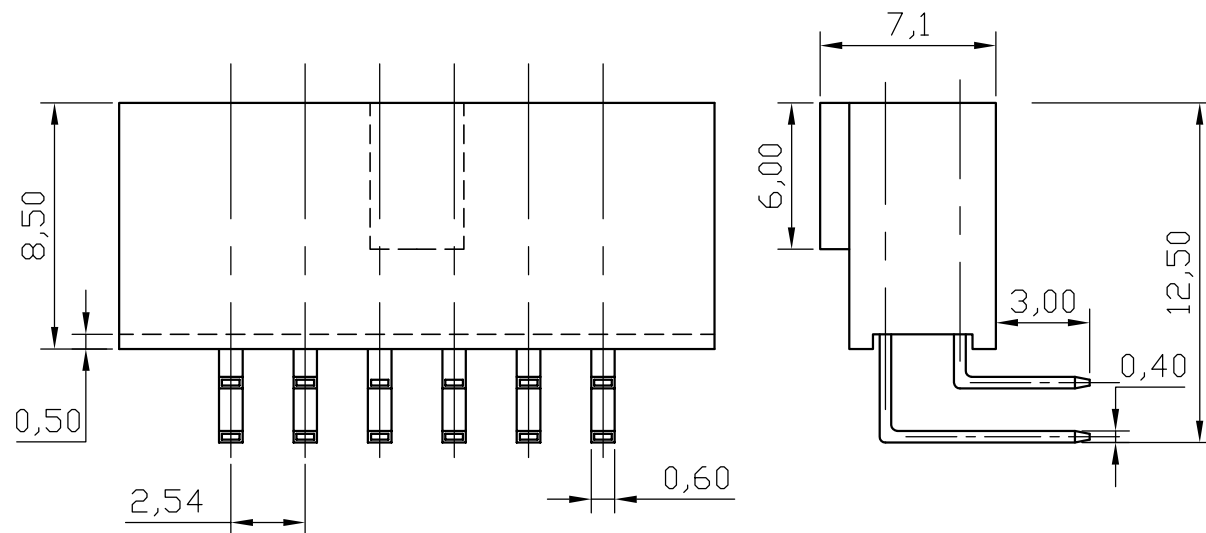

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Material



Insulation: PBT, Glass reinforced, rated UL94V-0
 Contact: Phosphor bronze or Bass

Electrical

Current Rating: 1Amp
 Contact Resistance: 30mΩ max.
 Insulation Resistance: 3000MΩ min.
 Dielectric Withstanding Voltage: 500V AC for 1 min.
 Operating Temperature: -40°C to 105°C

HOW TO ORDER: MAT[][D][N][][S][S][WB][][R] 1 2 3 4 5 6 7 8

- 1- Nr. of Ways
 Double Row: 2 to 80
- 2- Row Version:
 (D)-Double Row
- 3- Pin Style
 (N)-Right Angle(90°)
 (R)-Straight(180°)
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
 (C)-0,38um Au/Sn
 (H)-0,76um Au/Sn
- 5- Profile:
 (S) - 8,5mm
- 6- Body Option:
 (WB) With Bump
- 7- Contact Option:
 (4)- Void 4 Pin
 (0)- Standard Type
- 8- (R)RoHS Compliant

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE 4:1	TITLE 2.54mm FEMALE HEADER DUAL ROW 90° H=8.5mm	DATE JULY 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO