

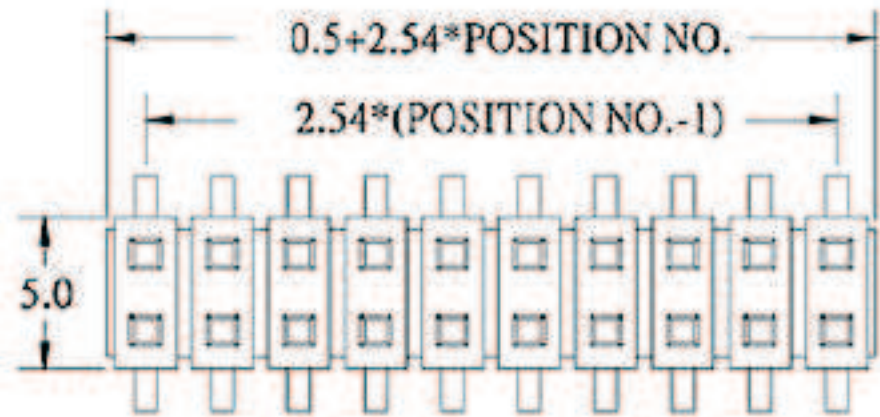


REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		
B	CÓD. ANT.: MAT[XX][D][R][]D[S][B][R]		01/2012

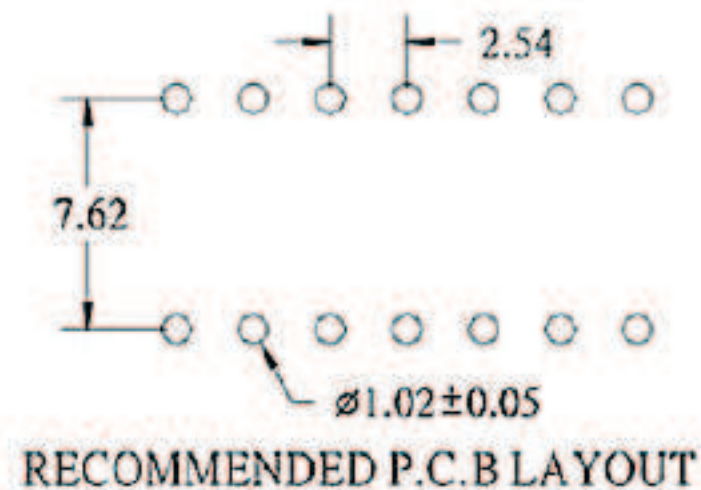

(TYPE B)

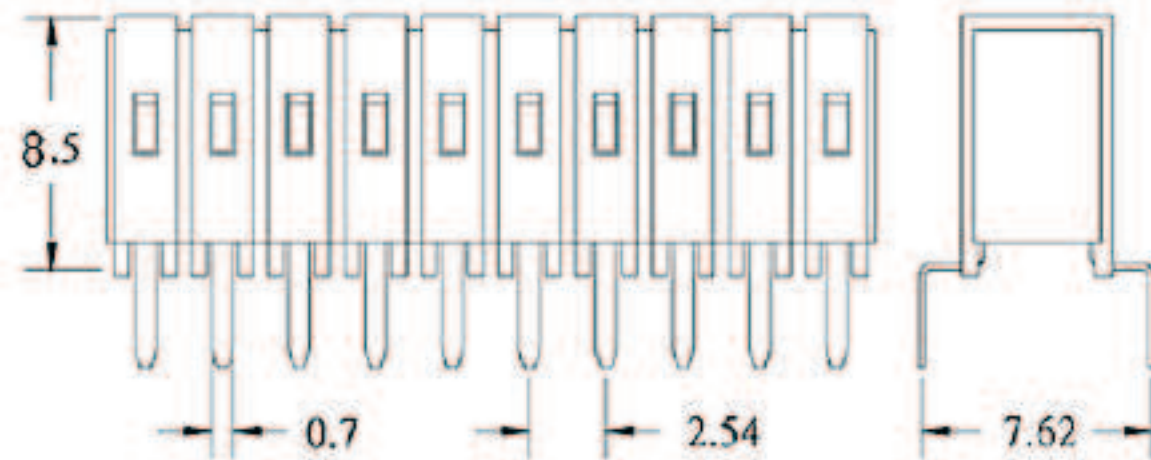

SPECIFICATIONS

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1 minute

Operating Temperature : -40°C to +105°C

HOW TO ORDER:

MATBL [] [D][R][] [S][S][] [R]

1 2 3 4 5 6 7

1 - Nr. of Ways:
Double Row: 2 to 80

2 - Row Version:
(D) - Double Row

3 - Pin Style:
(R) - Straight (180°)

4 - Terminal Plating:
(E) - Sn
(D) - Flash Au
(F) - 0,38um Au
(G) - 0,76um Au
(C) - 0,38um Au/Sn
(H) - 0,76um Au/Sn

5 - Profile:
(S) - 8,5mm

6 - Options:
(T) - Tube Packing
(R) - Reel Packing
(Others Options
Please Consult)

7 - (R) - RoHS Compliant

MATRIX		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE 2.54mm FEMALE HEADER DUAL ROW 180°	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego