
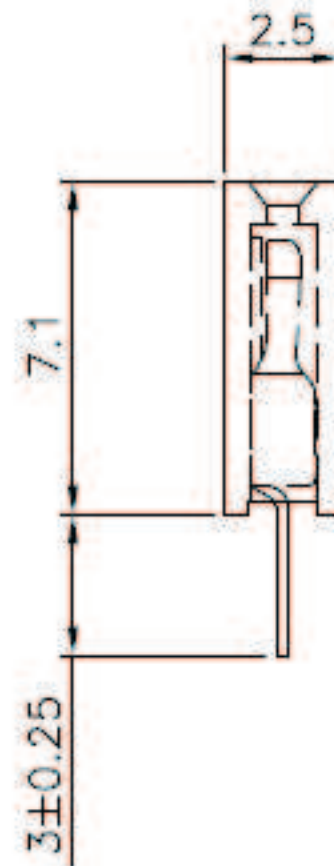


Recommended P.C.Board

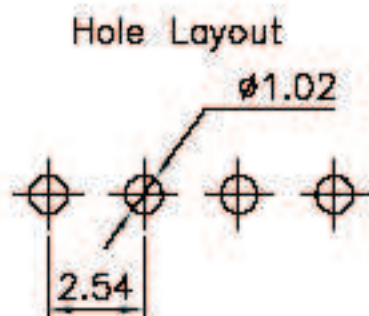

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

HOW TO ORDER:
MAT[][S][R][]S7.1[R]
1 2 3 4 5

1- Nr. of Ways

Single Row: 1 to 40
 Double Row: 2 to 80

2- Row Version:

(S)-Single Row
 (D)-Double Row




3- Pin Style



(N)-90°
 (R)-180°

4- Terminal Plating:

(E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au

5- (R) RoHS Compliant



 MATRIX Tecnologia Ind. e Com. Ltda.			
UNIT mm	SCALE	TITLE 2.54mm FEMALE HEADER 180° SINGLE ROW H=7.1mm	DATE September 2007
TOLERANCE: ±0.25			APP. BY
 		MATL	CHK. BY
		DWG. NO.	DR. BY Diego

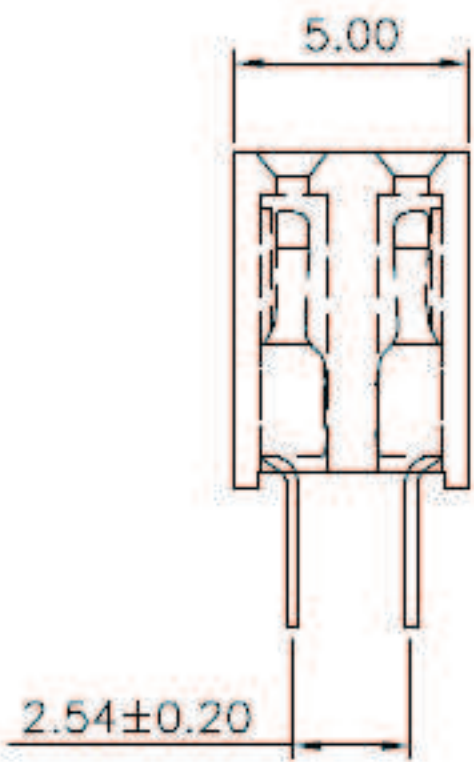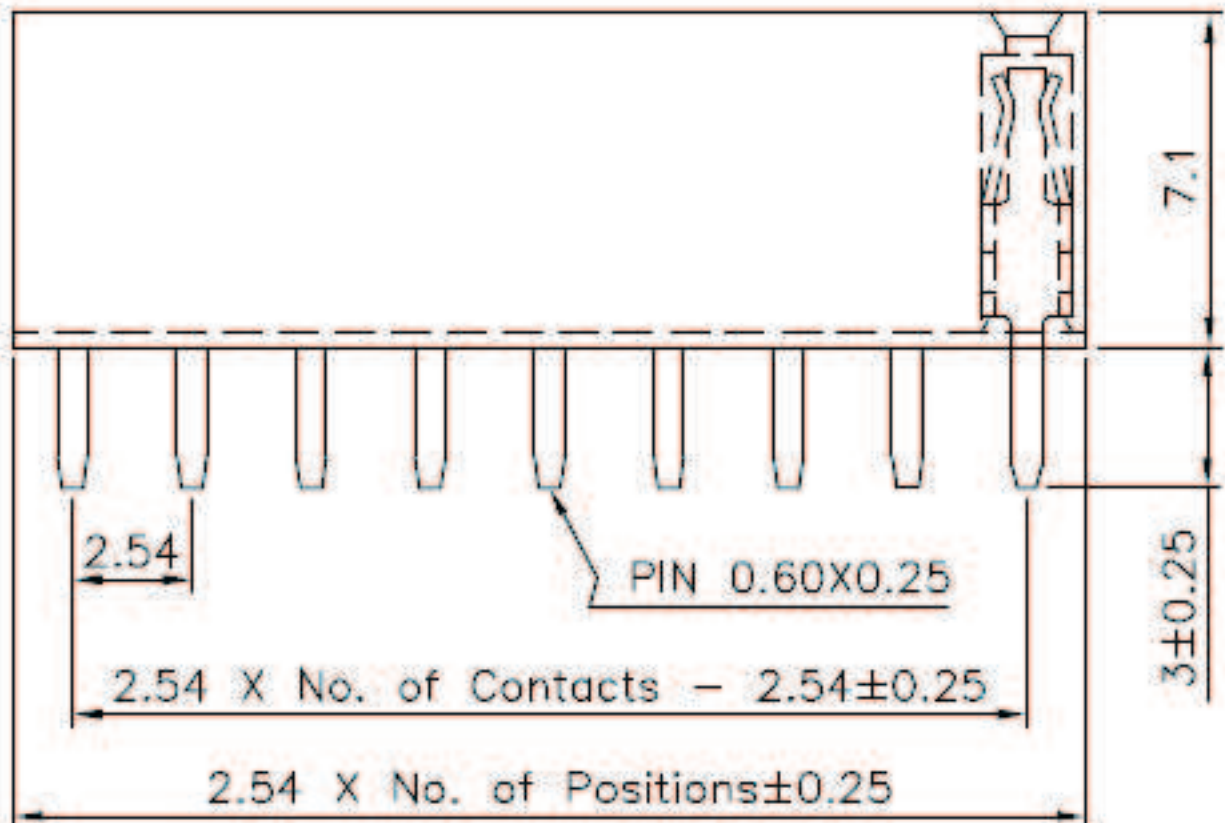

REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

HOW TO ORDER:
MAT[][D][R][]S7.1[R]
 1 2 3 4 5

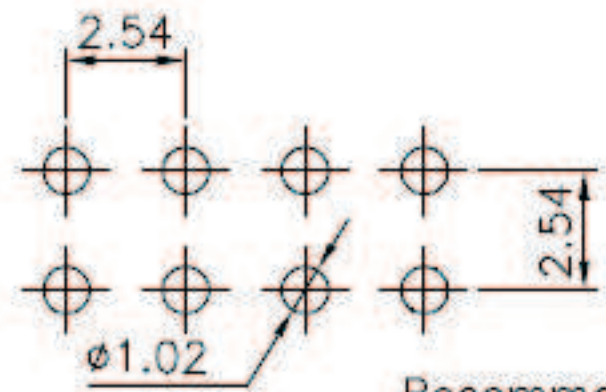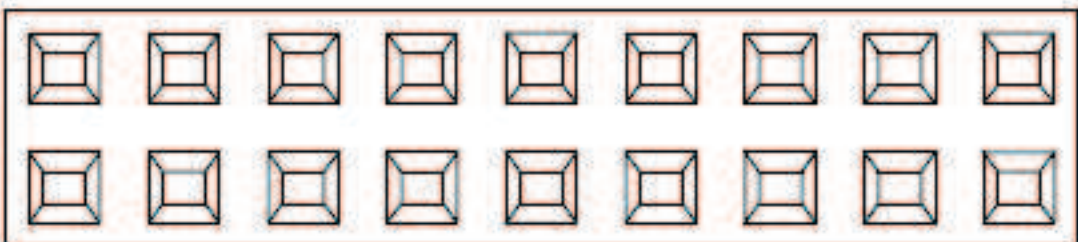

Recommended P.C.Board
 Hole Layout

- 1- Nr. of Ways
 Single Row: 1 to 40
 Double Row: 2 to 80
- 2- Row Version:
 (S)-Single Row
 (D)-Double Row
- 3- Pin Style
 (N)-90°
 (R)-180°
- 4- Terminal Plating:
 (E)-Sn
 (D)-FLASH Au
 (F)-0,38um Au
 (G)-0,76um Au
- 5- (R) RoHS Compliant

		MATRIX Tecnologia Ind. e Com. Ltda.	
UNIT mm	SCALE	TITLE 2.54mm FEMALE HEADER 180° DUAL ROW H=7.1mm	DATE September 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY Diego