




REV	ECN. NO.	APP	DATE
A	EDIÇÃO INICIAL		

MATERIAL

Insulator - PBT(UL 94V-0)
Contact-Copper Alloy

SPECIFICATION

Current Rating: 3Amp
Contact Resistance: 20Milliohm min.
Dielectric Voltage: 500V AC for One Minute
Operatint Temperature: -40°C to 105°C

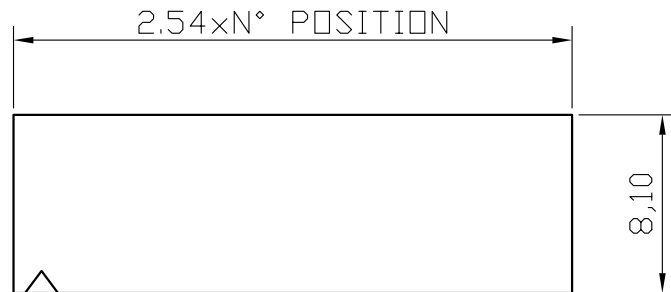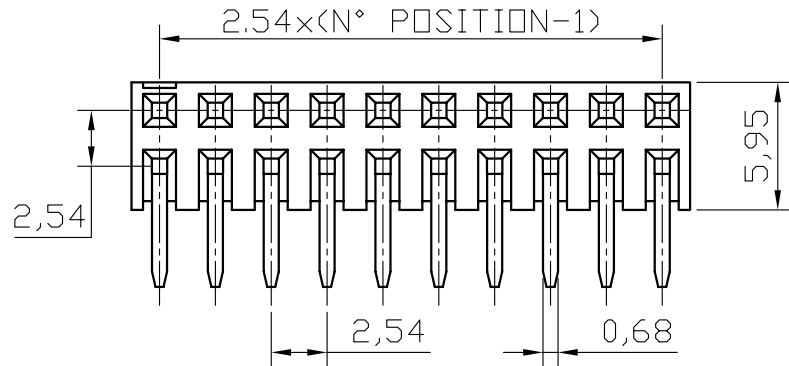

**HOW TO ORDER:
MAT[][D][R][][S[][R]**

1 2 3 4 5 6

- 1- Nr. of Ways
Single Row: 1 to 40
Double Row: 2 to 80
- 2- Row Version:
(S)-Single Row
(D)-Double Row
- 3- Pin Style
(N)-90°
(R)-180°
- 4- Terminal Plating:
(E)-Sn
(D)-FLASH Au
(F)-0,38um Au
(G)-0,76um Au
(C)-0,38um Au/Sn
(H)-0,76um Au/Sn
- 5- Profile:
(I)-5,80mm
(K)-5,95mm
- 6- (R) RoHS Compliant



MATRIX Tecnologia Ind. e Com. Ltda.

UNIT mm	SCALE 3:1	TITLE 2.54mm SIDE ENTRY FEMALE HEADER DUAL ROW H=5.95mm	DATE JULY 2007
TOLERANCE: ±0.25			APP. BY
		MATL	CHK. BY
		DWG. NO.	DR. BY DIEGO